

PRINCIPALES UTILISATIONS

Support tuyauterie :Point fixe
Réseau frigo-vivre ;eau glycolée,eau saumure, Freon (FVP,FVN)

DOCUMENTS DE REFERENCE

Rep 5: B2211A133 / FISU26IF36ZZ63 pour zones techniques
Rep 5: B2211A137 / FISU26IH25ZZ64 pour zones EM

FOURNISSEUR FABRICANT

George Fischer

ETAT DE LIVRAISON

Point fixe préassemblé

DOCUMENTS DE CONTROLE

-

MATERIEL AVEC APPROBATION

Classement de réaction au feu PPF suivant résolution A653(16) de l'OMI

MATIERE TRAITEMENT DE SURFACE

Polyethylene (PE 100) - SDR 11

CARACTERISTIQUES

Point fixe

MAIN USES

Pipe support :Fixed point
Provision refrigerating plant;water glycol,water brine, Freon .(FVP,FVN)

REFERENCE DOCUMENTS

Rep 5: B2211A133 / FISU26IF36ZZ63 technical aera
Rep 5: B2211A137 / FISU26IH25ZZ64 EM aera

SUPPLIER MANUFACTURER

George Fischer

DELIVERY STATUS

Pre-assembled fixed point installation

CONTROL DOCUMENTS

-

MATERIAL WITH APPROVAL

Fire reaction low flame spread according to resolution A653(16) from l'IMO

MATERIAL SURFACE TREATMENT


Polyethylene (PE 100) - SDR 11

CHARACTERISTICS

Fixed point

Pre-assembled Fixed point intallation

+GF+

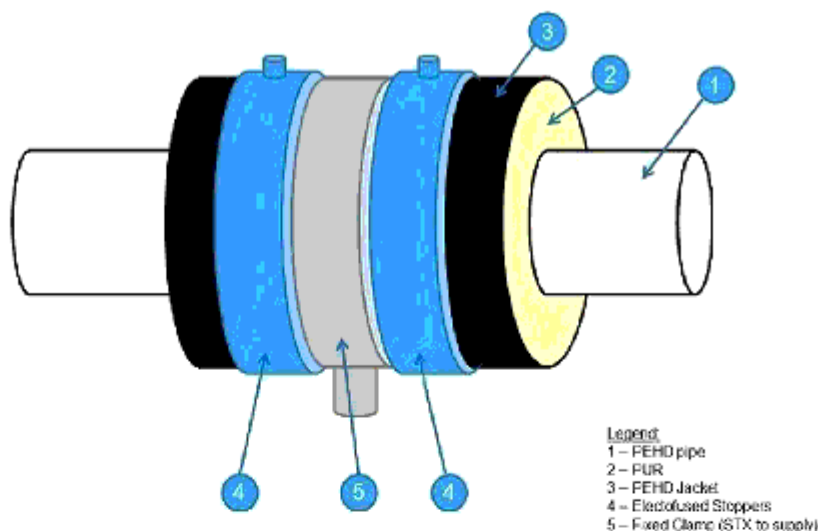

L'ensemble pré assemblé par GF ne comprend pas le collier Rep 5

Le Rep 5 est de fourniture STX

Ref. Rep 5: B2211A133 / FISU26IF36ZZ63 pour zones techniques


Ref. Rep 5: B2211A137 / FISU26IH25ZZ64 pour zones EM

STANDARD ELEMENTAIRE

ELEMENT STANDARD

Coupling-Polyethylene PE100-Fusion Plain End--DIN 8074-Fixed point for technical and EM aera

(All dimensions in millimetres)

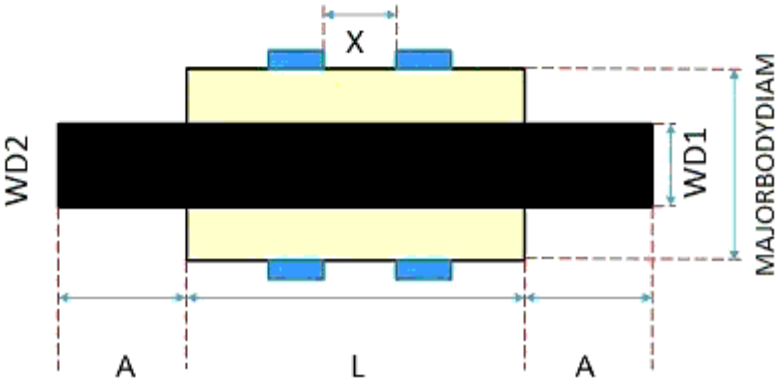

Référence Objet	DN1 (mm)	DN2 (mm)	Weight (kg)	Water Weight (kg)	Work Diam 1 WD1 (mm)	Work Diam 2 WD2 (mm)	Pipe Length (mm)	F1 TO F2 (mm)	Major Body Diam (mm)	X (mm)	L (mm)	A (mm)
5000002723	50	50	2	.7	63	63	320	320	125	40	200	60
5000002724	65	65	2.3	1.1	75	75	365	365	140	40	235	65
5000002725	80	80	2.5	1.7	90	90	420	420	160	40	280	75
5000002726	100	100	3.4	3.2	110	110	510	510	180	40	340	85
5000002727	125	125	3.8	6.3	140	140	620	620	225	40	430	95
5000002728	150	150	4.2	9.3	160	160	695	695	250	40	495	100