

ELEMENT STANDARD

TAQUETS DE TOURNAGE TYPE c

c TYPE BELAYING CLEATS

B.24.18.A1.02 REV B

PRINCIPALES UTILISATIONS

Pour palan de garde (cordage textile Ø 18)

NAVIRE

Tous navires

MATIERE

Plat suivant std A.42.11.A1.02 Rond suivant std A.23.11.A1.01

CARACTERISTIQUES

Rep 1 : plat 60-12 Rep 2: rond \emptyset 25

MAIN USES

For pulley block of guard (textile rope Ø 18)


SHIP All ships


MATERIAL

Flat as per std A.42.11.A1.02 Round as per std A.23.11.A1.01

CHARACTERISTICS Rep 1: flat 60-12

Rep 2 : round \emptyset 25

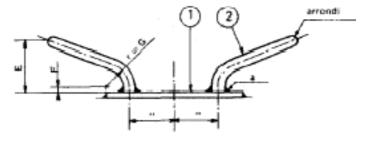



Dimensions en mm

Rep. taquet	Α	В	С	D	Е	F	G	Н	SOUDURE		Masse	REFERENCE
									а	a1	kg	OBJET
С	plat	220	140	130	90	10	37.5	400	6.5	5	2.5	SA012831

DOCUMENT DE CONTROLE - A délivrer par le fournisseur

Sans

CONTROL DOCUMENTS - To be delivered by the supplier

No document

MATERIEL AVEC APPROBATION

Sans

MATERIAL WITH APPROVAL No agreement

FOURNISSEUR / REFERENCE

Non imposé / Sans SUPPLIER / REFERENCE

No imposed / No reference

NORME DE REFERENCE REFERENCE NORM

NF.A 35.501 NF.EN 10027

ETAT DE LIVRAISON

DELIVERY STATUS

COLISAGE

PACKAGING

ETAT DE CONDITIONNEMENT

CONDITIONNING STATUS

Rev 0 (FVT) : Création du standard à partir de la norme CAT AC.62.61.A3 Rév. B : Modification du logo + copyright

Signé par Y. LE GALL

COPYRIGHT OF STX FRANCE S.A. ALL RIGHTS RESERVED.
NO PART THEREOF MAY BE DISCLOSED, COPIED, DUPLICATED OR IN ANY OTHER WAY MADE USE OF, EXCEPT WITH THE PRIOR APPROVAL OF STX FRANCE S.A