

PRINCIPALES UTILISATIONS

Travaux de serrurerie

DOCUMENTS DE REFERENCE

NF EN 10025 NF EN 10204 NF A 02015 NF A 45008 NF A 45001

FOURNISSEUR FABRICANT

Non imposé

ETAT DE LIVRAISON

Peinture blanche sur extrémité de chaque barres suivant NFA 02015
Poinçonnage de la nuance + marque du fournisseur sur cette
extrémité - Fardeaux ligaturés 3 tonnes

DOCUMENTS DE CONTROLE

Certificate according to NF EN 10204 type 3.1

MATERIEL AVEC APPROBATION

MATIERE TRAITEMENT DE SURFACE

Pré-peint avec peinture suivant std A9132C201 carboweld 11P gris ép.
15 micron +-3

CARACTERISTIQUES

Dimensions suivant NF A 45 001 Tolérances suivant NF A 45008

MAIN USES

For metal works

REFERENCE DOCUMENTS

NF EN 10025 NF EN 10204 NF A 02015 NF A 45008 NF A 45001

SUPPLIER MANUFACTURER

No imposed

DELIVERY STATUS

White paint on one end of each rod as per NF A 02015 Shade reference
punchong + supplier trade mark on this end - Binded load 3 tons

CONTROL DOCUMENTS

Certificate according to NF EN 10204 type 3.1


MATERIAL WITH APPROVAL

MATERIAL SURFACE TREATMENT

Prepainted with paint as per STD A9132C201 carboweld 11P grey
Thick, 15micron +-3

CHARACTERISTICS

Sizes as per NF A 45 001 Tolerances as per NF A 45 008

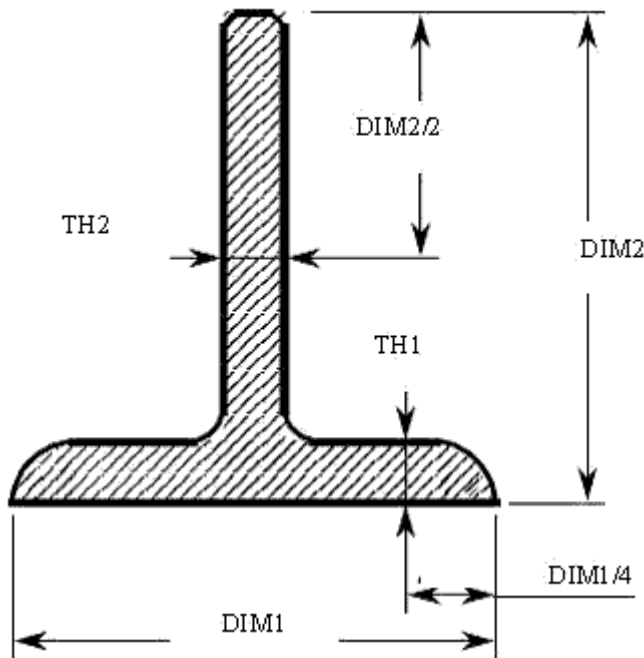

Référence Objet	Dim 1 (mm)	Dim 2 (mm)	TH1 (mm)	TH2 (mm)	Linear Weight (kg/m)	Length (mm)	Tolerance Dim (mm)	Tolerance Dim (mm)	Tolerance Length (mm)	Tolerance TH (mm)
5000015525	40	40	5	5	2.96	6000	+ - 1	+ - 1	+ - 100	+ - 0.5
02505006	50	50	6	6	4.44	6000	+ - 1	+ - 1	+ - 100	+ - 0.5
02606007	60	60	7	7	6.23	6000	+ - 1.5	+ - 1.5	+ - 100	+ - 0.75
5000015526	80	80	9	9	10.7	6000	+ - 1.5	+ - 1.5	+ - 100	+ - 0.75
02101011	100	100	11	11	20.9	6000	+ - 1.5	+ - 1.5	+ - 100	+ - 0.75

Rév. B: (A Auvinet) Ajout de nouvelles références 40x40x5 et 80x80x9