
















RGB

200




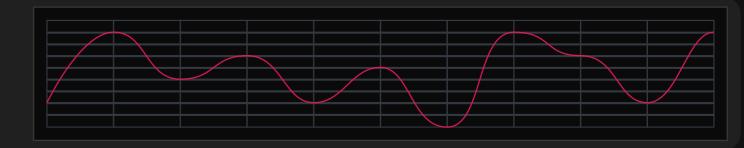

ORP






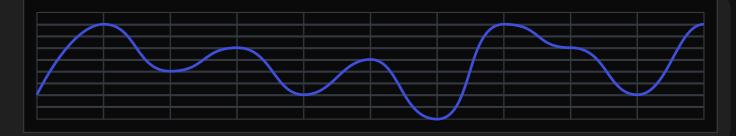

HCL




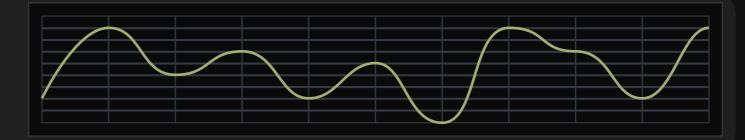

S.G

1.360




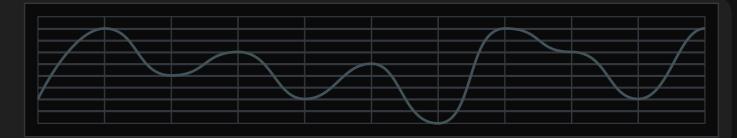

49.7





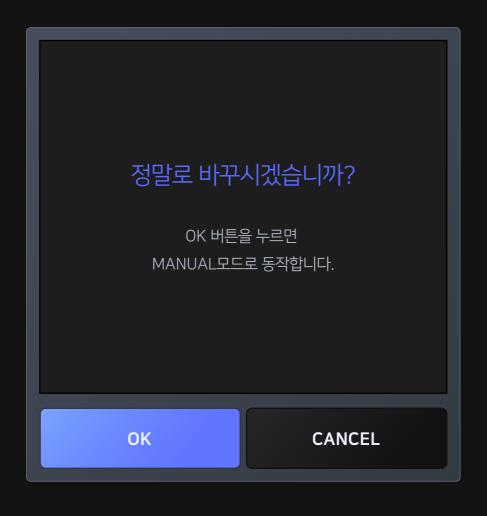

RGB 신형SENSOR DATA

| SENOSOR | TYPE | BYTE |
|------------------------|------|------|
| 1. FQ_R | INT | 2 |
| 1. FQ_G | INT | 2 |
| 1. FQ_B | INT | 2 |
| 1. ORP | INT | 2 |
| 1. HCL | INT | 2 |
| 1. SG | INT | 2 |
| 1. LO_TEMP | INT | 2 |
| 1. CONTROL MODE & PUMP | INT | 2 |
| 1. ALARM 1 | INT | 2 |
| 1. ALARM 2 | INT | 2 |
| 합계 | INT | 2 |
| | | |

CANCEL






















RGB



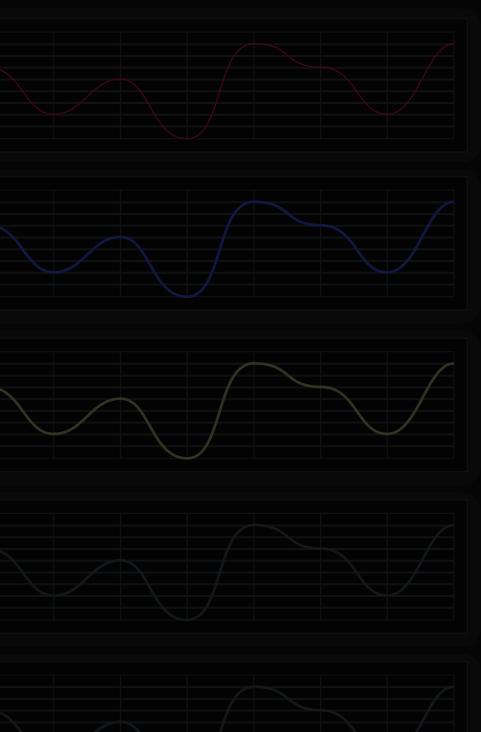























RGB

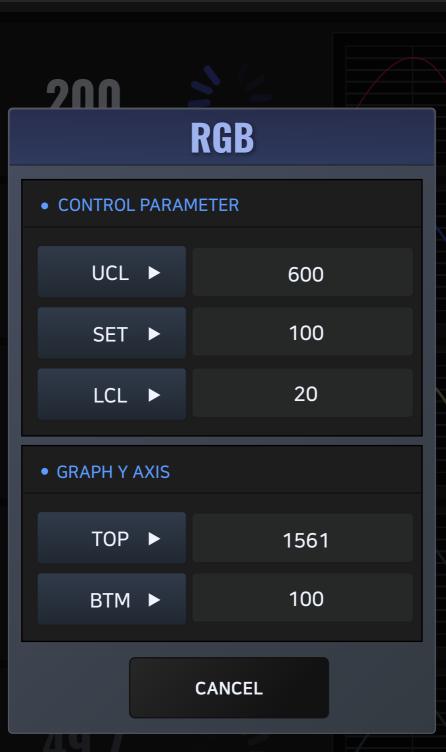





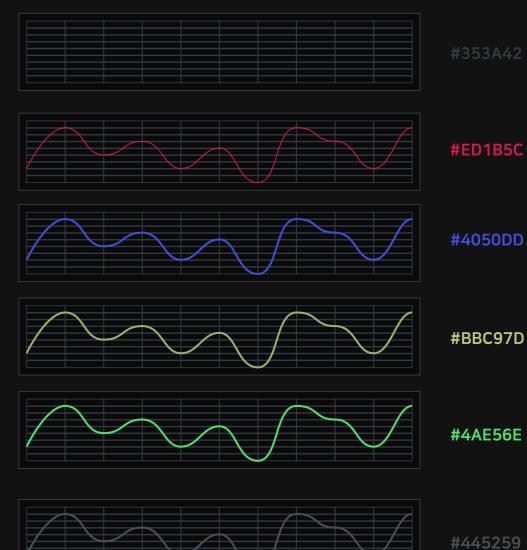














SETTING COM.

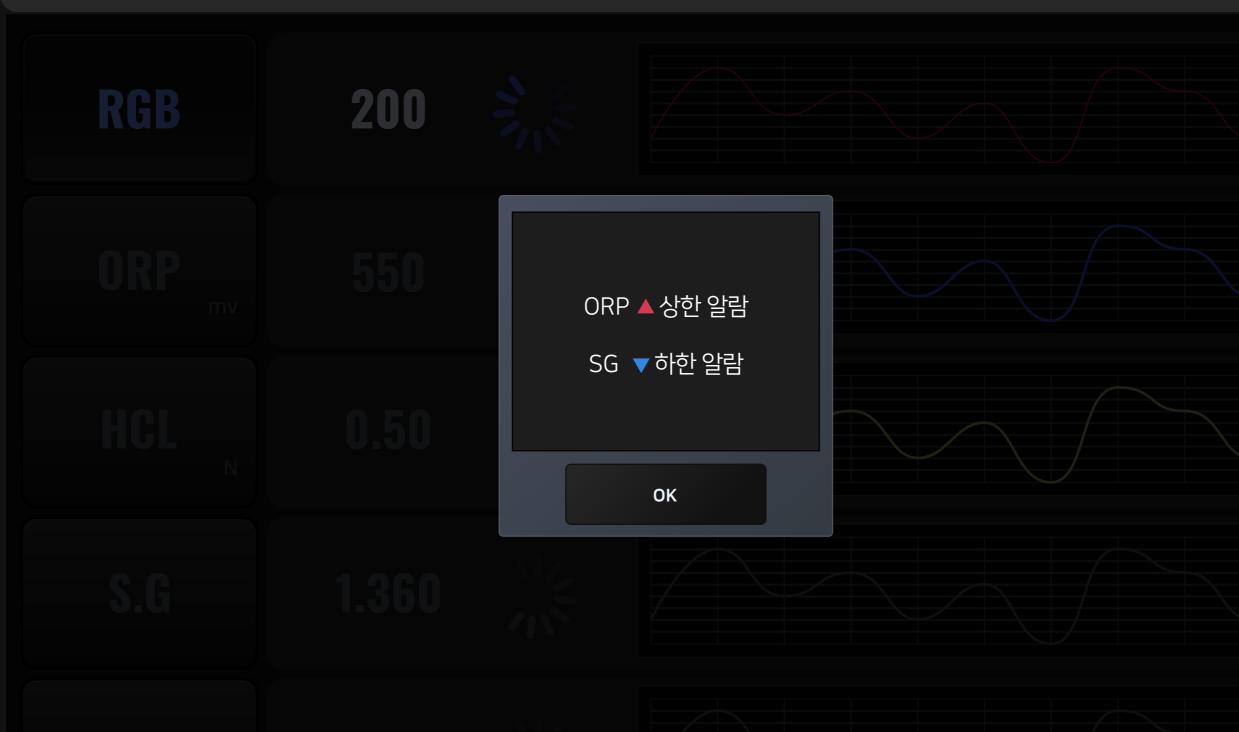























200

E LOG DATA

