NTMFS5844NL, NVMFS5844NL

MOSFET – Power, Single, N-Channel

60 V, 61 A, 12 mΩ

ON Semiconductor®

http://onsemi.com

$V_{(BR)DSS}$	$R_{DS(ON)}$ MAX	I_D MAX
60 V	12 mΩ @ 10 V	61 A
	16 mΩ @ 4.5 V	

Features

- Small Footprint (5x6 mm) for Compact Design
- Low $R_{DS(on)}$ to Minimize Conduction Losses
- Low Q_G and Capacitance to Minimize Driver Losses
- NVMFS5844NLWF – Wettable Flanks Product
- NVMFS Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q101 Qualified and PPAP Capable
- These Devices are Pb–Free and are RoHS Compliant

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

Parameter			Symbol	Value	Unit
Drain–to–Source Voltage			V_{DSS}	60	V
Gate–to–Source Voltage			V_{GS}	±20	V
Continuous Drain Current $R_{\Psi J-mb}$ (Notes 1, 2, 3, 4)	Steady State	T_{mb} = 25°C	I_D	61	A
		T_{mb} = 100°C		43	
Power Dissipation $R_{\Psi J-mb}$ (Notes 1, 2, 3)		T_{mb} = 25°C	P_D	107	W
		T_{mb} = 100°C		54	
Continuous Drain Current $R_{\theta JA}$ (Notes 1, 3, 4)	Steady State	T_A = 25°C	I_D	11.2	A
		T_A = 100°C		8.0	
Power Dissipation $R_{\theta JA}$ (Notes 1 & 3)		T_A = 25°C	P_D	3.7	W
		T_A = 100°C		1.8	
Pulsed Drain Current	T_A = 25°C, t_p = 10 μs		I_{DM}	247	A
Current Limited by Package (Note 4)		T_A = 25°C	$I_{DmaxPkg}$	80	A
Operating Junction and Storage Temperature			T_J, T_{stg}	–55 to 175	°C
Source Current (Body Diode)			I_S	60	A
Single Pulse Drain–to–Source Avalanche Energy (T_J = 25°C, V_{DD} = 50 V, V_{GS} = 10 V, $I_{L(pk)}$ = 31 A, L = 0.1 mH, R_G = 25 Ω)			E_{AS}	48	mJ
Lead Temperature for Soldering Purposes (1/8″ from case for 10 s)			T_L	260	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

THERMAL RESISTANCE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Junction–to–Mounting Board (top) – Steady State (Notes 2, 3)	$R_{\Psi J-mb}$	1.4	°C/W
Junction–to–Ambient – Steady State (Note 3)	$R_{\theta JA}$	41	

1. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
2. Psi (Ψ) is used as required per JESD51–12 for packages in which substantially less than 100% of the heat flows to single case surface.



N–CHANNEL MOSFET



DFN5
(SO–8FL)
CASE 488AA
STYLE 1

MARKING DIAGRAM



A = Assembly Location
Y = Year
W = Work Week
ZZ = Lot Traceability

ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 5 of this data sheet.

3. Surface−mounted on FR4 board using a 650 mm^2, 2 oz. Cu pad.
4. Maximum current for pulses as long as 1 second is higher but is dependent on pulse duration and duty cycle.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
OFF CHARACTERISTICS							
Drain−to−Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0 V, I_D = 250 μA		60			V
Drain−to−Source Breakdown Voltage Temperature Coefficient	$V_{(BR)DSS}/T_J$				57		mV/°C
Zero Gate Voltage Drain Current	I_{DSS}	V_{GS} = 0 V, V_{DS} = 60 V	T_J = 25 °C			1	μA
			T_J = 125°C			100	
Gate−to−Source Leakage Current	I_{GSS}	V_{DS} = 0 V, V_{GS} = ±20 V				±100	nA
ON CHARACTERISTICS (Note 5)							
Gate Threshold Voltage	$V_{GS(TH)}$	V_{GS} = V_{DS}, I_D = 250 μA		1.5		2.3	V
Negative Threshold Temperature Coefficient	$V_{GS(TH)}/T_J$				6.2		mV/°C
Drain−to−Source On Resistance	$R_{DS(on)}$	V_{GS} = 10 V	I_D = 10 A		10.2	12	mΩ
		V_{GS} = 4.5 V	I_D = 10 A		13	16	
Forward Transconductance	g_{FS}	V_{DS} = 5 V, I_D = 10 A			27		S
CHARGES, CAPACITANCES & GATE RESISTANCE							
Input Capacitance	C_{ISS}	V_{GS} = 0 V, f = 1 MHz, V_{DS} = 25 V			1460		pF
Output Capacitance	C_{OSS}				150		
Reverse Transfer Capacitance	C_{RSS}				96		
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 10 V, V_{DS} = 48 V; I_D = 10 A			30		nC
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 4.5 V, V_{DS} = 48 V; I_D = 10 A			15		
Threshold Gate Charge	$Q_{G(TH)}$				1.0		
Gate−to−Source Charge	Q_{GS}				4.0		
Gate−to−Drain Charge	Q_{GD}				8.0		
Plateau Voltage	V_{GP}				3.0		V
Gate Resistance	R_G				0.62		Ω
SWITCHING CHARACTERISTICS (Note 6)							
Turn−On Delay Time	$t_{d(ON)}$	V_{GS} = 4.5 V, V_{DS} = 48 V, I_D = 10 A, R_G = 2.5 Ω			12		ns
Rise Time	t_r				25		
Turn−Off Delay Time	$t_{d(OFF)}$				20		
Fall Time	t_f				10		
DRAIN−SOURCE DIODE CHARACTERISTICS							
Forward Diode Voltage	V_{SD}	V_{GS} = 0 V, I_S = 10 A	T_J = 25°C		0.79	1.2	V
			T_J = 125°C		0.65		
Reverse Recovery Time	t_{RR}	V_{GS} = 0 V, dIS/dt = 100 A/μs, I_S = 10 A			19		ns
Charge Time	t_a				13		
Discharge Time	t_b				6.0		
Reverse Recovery Charge	Q_{RR}				15		nC

5. Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.
6. Switching characteristics are independent of operating junction temperatures.

TYPICAL CHARACTERISTICS

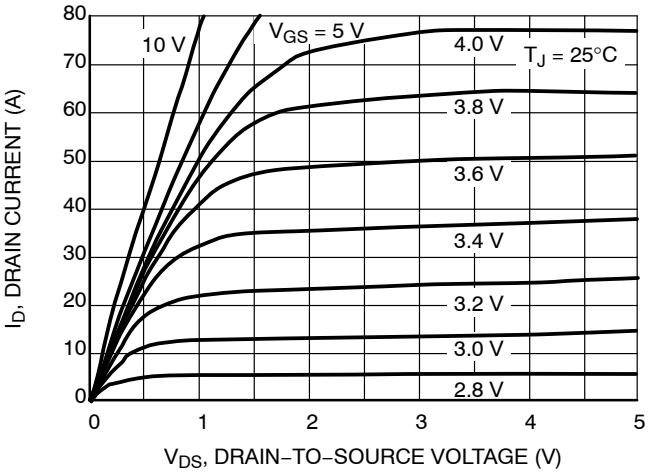

Figure 1. On−Region Characteristics

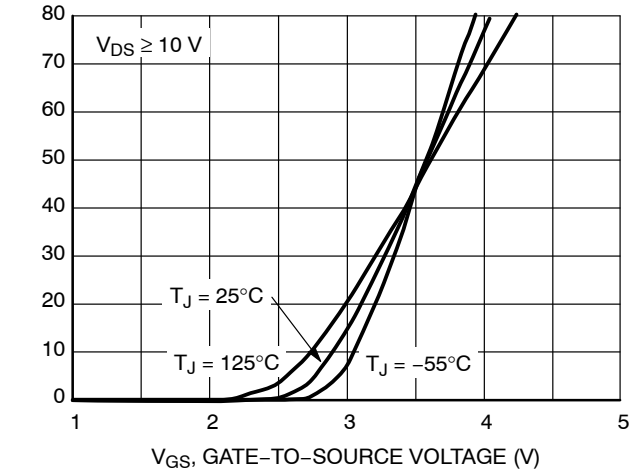

Figure 2. Transfer Characteristics

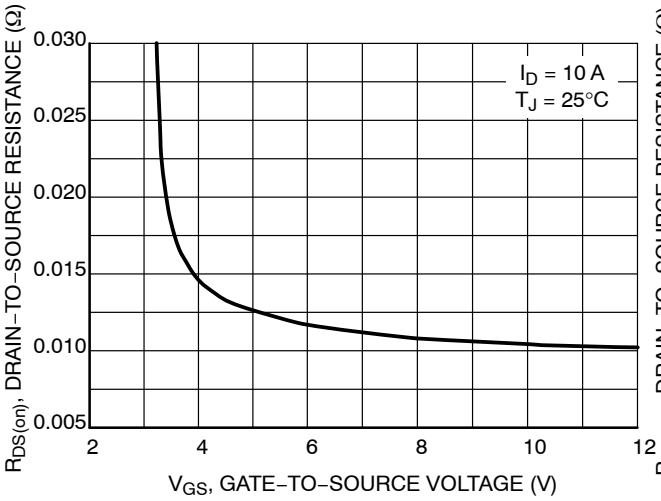

Figure 3. On−Resistance vs. Gate−to−Source Voltage

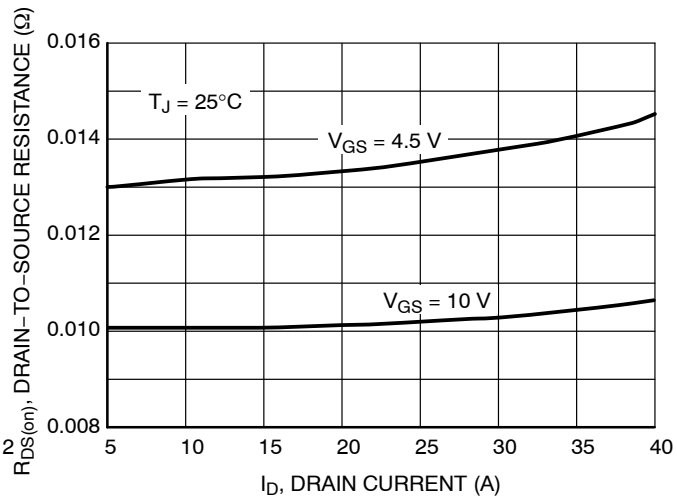

Figure 4. On−Resistance vs. Drain Current and Gate Voltage

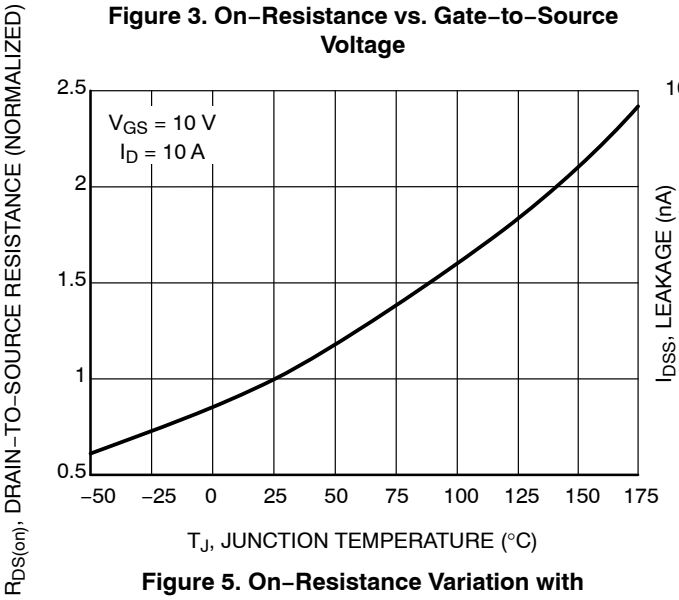

Figure 5. On−Resistance Variation with Temperature

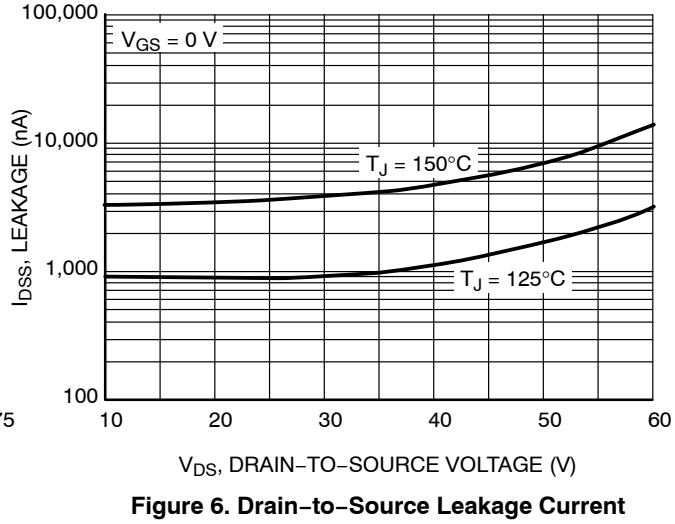

Figure 6. Drain−to−Source Leakage Current vs. Voltage

TYPICAL CHARACTERISTICS

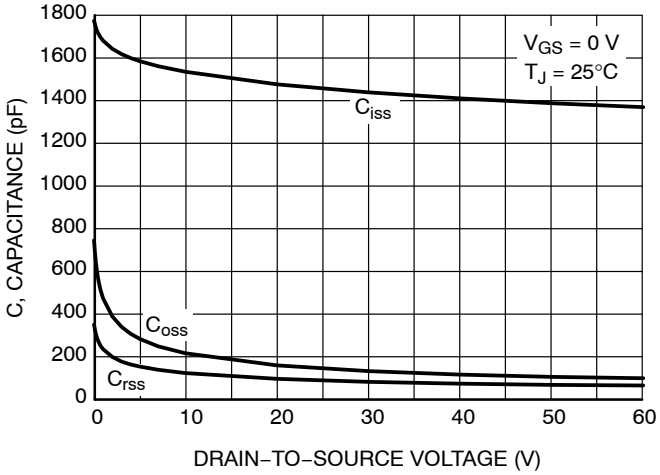

Figure 7. Capacitance Variation

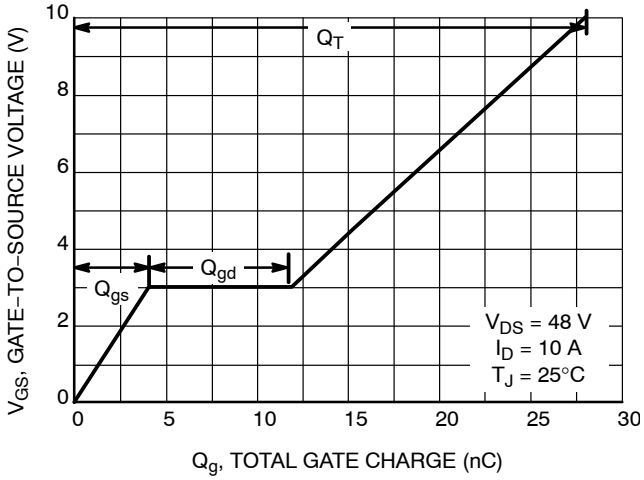

Figure 8. Gate−to−Source Voltage vs. Total Charge

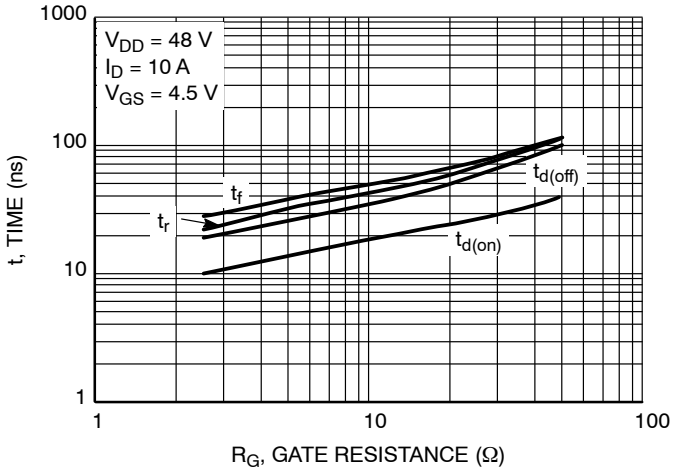

Figure 9. Resistive Switching Time Variation vs. Gate Resistance

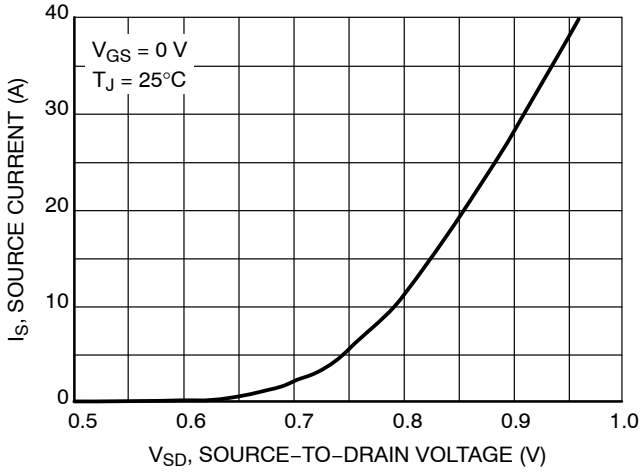

Figure 10. Diode Forward Voltage vs. Current

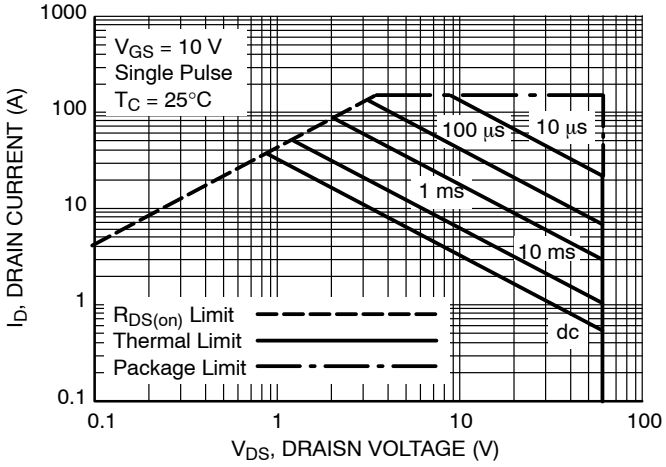

Figure 11. Maximum Rated Forward Biased Safe Operating Area

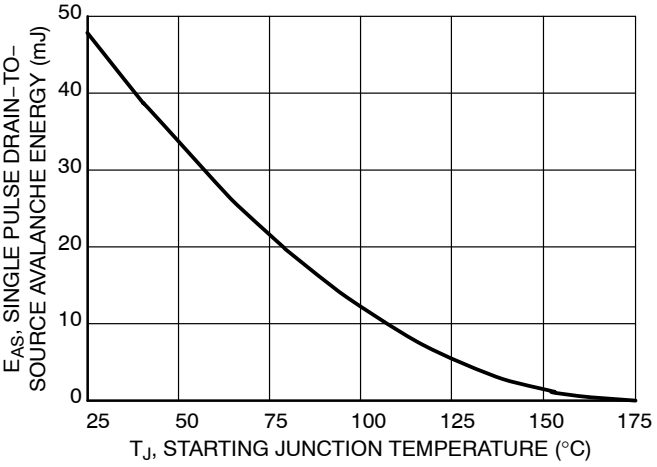

Figure 12. Maximum Avalanche Energy vs. Starting Junction Temperature

TYPICAL CHARACTERISTICS

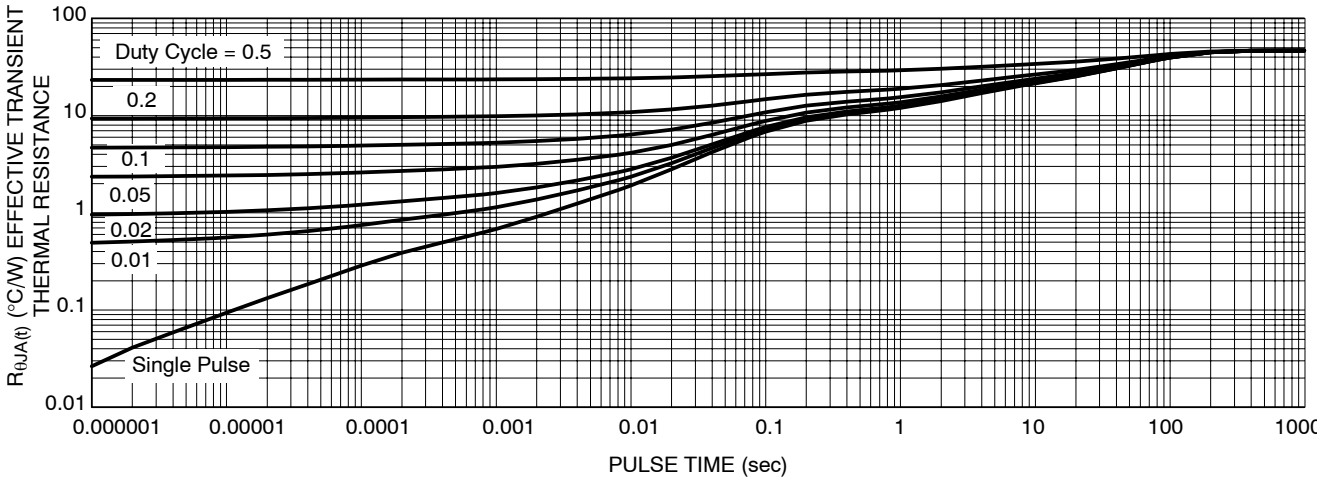

Figure 13. Thermal Response

DEVICE ORDERING INFORMATION

Device	Marking	Package	Shipping†
NTMFS5844NLT1G	5844NL	DFN5 (Pb−Free)	1500 / Tape & Reel
NVMFS5844NLT1G	V5844L	DFN5 (Pb−Free)	1500 / Tape & Reel
NVMFS5844NLWFT1G	5844LW	DFN5 (Pb−Free)	1500 / Tape & Reel
NVMFS5844NLT3G	V5844L	DFN5 (Pb−Free)	5000 / Tape & Reel
NVMFS5844NLWFT3G	5844LW	DFN5 (Pb−Free)	5000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

PACKAGE DIMENSIONS

DFN5 5x6, 1.27P
(SO−8FL)
CASE 488AA
ISSUE H

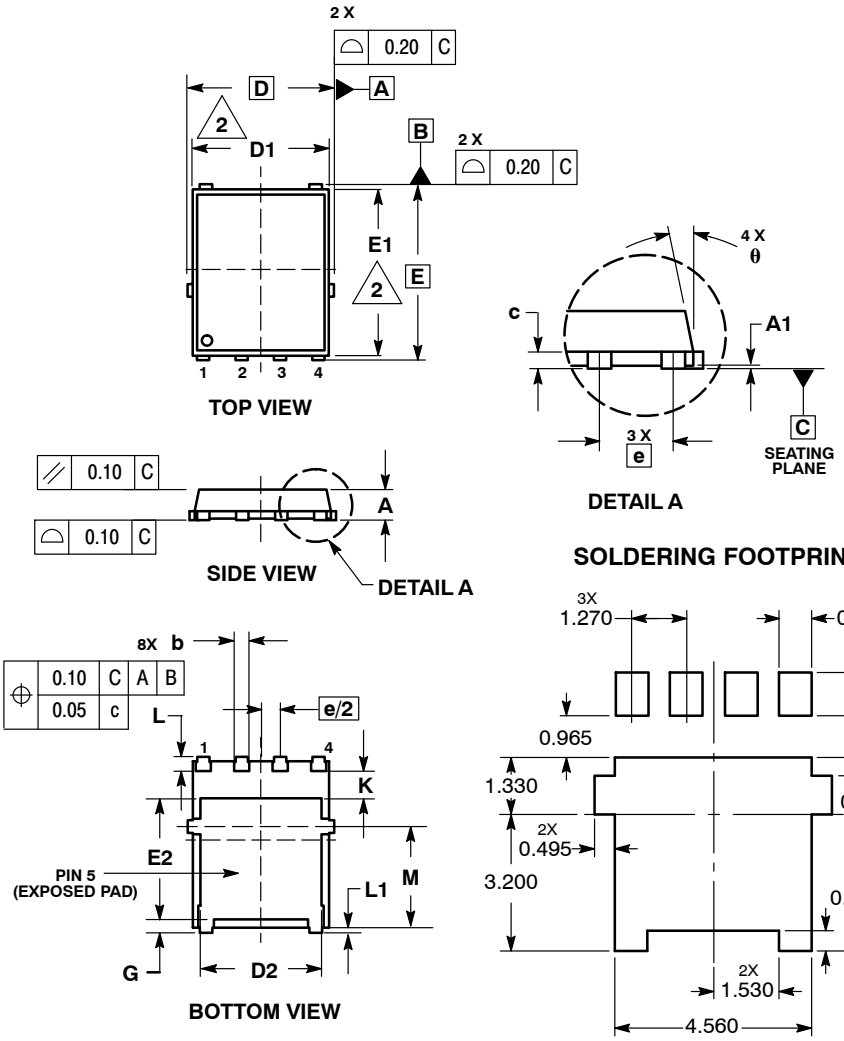

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION D1 AND E1 DO NOT INCLUDE MOLD FLASH PROTRUSIONS OR GATE BURRS.

	MILLIMETERS		
DIM	MIN	NOM	MAX
A	0.90	1.00	1.10
A1	0.00	−−−	0.05
b	0.33	0.41	0.51
c	0.23	0.28	0.33
D		5.15 BSC	
D1	4.70	4.90	5.10
D2	3.80	4.00	4.20
E		6.15 BSC	
E1	5.70	5.90	6.10
E2	3.45	3.65	3.85
e		1.27 BSC	
G	0.51	0.61	0.71
K	1.20	1.35	1.50
L	0.51	0.61	0.71
L1	0.05	0.17	0.20
M	3.00	3.40	3.80
θ	0 °	−−−	12 °

STYLE 1:
PIN 1. SOURCE
2. SOURCE
3. SOURCE
4. GATE
5. DRAIN
6. DRAIN

SOLDERING FOOTPRINT*

*For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5817−1050

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ON Semiconductor:

NTMFS5844NLT1G NVMFS5844NLT3G NVMFS5844NLT1G NVMFS5844NLWFT1G NVMFS5844NLWFT3G