CATALOG

DOLI

50 YEARS OF INNOVATION

Electronic 2026

Material Testing Solutions



MADE IN GERMANY

TABLE OF CONTENTS

Welcome to DOLI Electronic 3

Your tests. Our technology. 3

DOLI systems master every test 4

50 Years of Passion for Perfect Testing Results 5

Materials Testing – Precision Begins with Electronics 6

machine setup with EDCi control 8

Technical Data Comparison EDCi 10

Technical Data Amplifier DC160/DC320 11

Plug Assignment 12

EDCi built-in devices 13

- EDCi10 built-in unit 14
- EDCi15 built-in unit - iCreep-version 16
- EDCi20 built-in units 18
- EDCi50 built-in units 20
- EDCi70 built-in devices 22

EDCi Tabletop Devices 24

EDCi tabletop devices 25

- EDCi22 tabletop devices 26
- EDCi22A tabletop devices 28
- EDCi52 tabletop devices 30
- EDCi52A tabletop devices 32
- EDCi72 tabletop devices 34
- EDCi72A tabletop devices 36

Device Options 38

- Synchronization of several EDCs 39
- Accessories 40
- Accessories 42
- DriveBox 43
- iDCA 44
- iCFA 45
- iIO 46
- iINC 47
- iADA 48
- iCOM 49
- iADA-Box 50

RMCi 51

- RMCi1 52
- RMCi6 53
- RMCi7 54
- RMCi8 55
- RMCi extension cables 56

SGS plugs 57

Expansion modules 58

- Sensor Plug for Analog transducers for all interfaces 59
- Sensor Plug for DC-signals 60
- Sensor Plug for INCREMENTAL transducers for EDCi (x7) 61
- Sensor Plug for INCREMENTAL transducers for iINC + iINCX 62
- Sensor Plug for piezo electric transducer fo IEPE 63
- DC-Servomotors 64

Motors & Valves 64

- Valve & Manifolds 65
- Transducer with accessories 66
- Mounting angle for EDC EDCi Series 67
- Transport box EDCi Series 67
- Cabinets and mounting 68

Software 69

- DoPE interface - The API for DOLI EDCi controllers 70

Your leading technology partner for control and regulation technology

WELCOME TO DOLI ELECTRONIC

DOLI – PRECISION, SPEED AND INNOVATION FOR OVER 50 YEARS

For more than five decades, DOLI has stood for precision, innovative technology and reliable solutions in material testing. With state-of-the-art real-time measurement and control technology, we provide the foundation for accurate test results and adaptive control at the highest level..

Our expertise in advanced electronic systems supports both static and dynamic material testing applications – from selecting the right EDCi controller to complete testing systems including accessories.

Professionalism, reliability and practical support are at the core of everything we do.
Together with our customers, we develop efficient, precise and seamless testing solutions tailored to a wide range of requirements.



Fig.: Headquater Münsingen (Swabian Alb - Germany)

From concept to result – technology that inspires

YOUR TEST. OUR TECHNOLOGY.

Control electronics and software that impresses engineers worldwide. With DOLI, your test project becomes a precise, reliable solution – from the initial idea to the final result.



Precise, reliable, cross-industry – from metal to medicine

DOLI SYSTEMS -MASTER EVERY TEST

As specialists in state-of-the-art electronics, our DOLI systems offer you a powerful platform for controlling and measuring materials testing machines. Our systems are used wherever materials, components or complete systems are tested for force, displacement, strain or load behaviour.

„From routine checks to special tests – DOLI masters every challenge.“



Overview of application sectors:

Metal and steel industry: tensile, compression and bending tests, fatigue and fatigue testing, quality control in rolling mills and foundries

Plastics and elastomer industry: tensile tests, elastomer testing (e.g. relaxation, tensile swelling tests), dynamic tests for automotive and consumer goods

Automotive and aerospace industry: Material and component testing for chassis components, car bodies and connecting elements, crash-relevant material testing, high-dynamic testing for lightweight materials

Construction industry: Compression tests on concrete and mortar, flexural tensile tests on structural steel and reinforcements, continuous load tests on composite materials

Textile and paper industry: Tear resistance tests on textiles, fabrics and nonwovens, tensile tests on paper and cardboard samples

Medical and pharmaceutical industry: testing of implants, dynamic fatigue testing, testing of packaging materials

Research & development / universities: materials research, fundamental research into material properties, development of new materials (e.g. high-performance composites, additive manufacturing)

Our Portfolio

50YEARS OF PASSION -FOR PERFECT TESTING RESULTS

Since our founding 50 years ago, our electronics and solutions have been used in testing machines, devices, and systems that examine the mechanical, physical, and chemical properties of materials, components, and products.

Over the decades, they have helped ensure quality, durability, safety, and performance across a wide range of industries.e of your products.



Today, more than 50,000 testing and inspection systems worldwide are equipped with our measurement, control, and automation technology. Trusted by testing machine manufacturers on every continent, our solutions are used in scientific and technical laboratories, materials testing institutes, and leading industrial companies. Especially in sectors such as automotive, aerospace, construction, and materials manufacturing, our technology has contributed to innovation and reliability for five decades.

“WITH OUR HIGH-PRECISION ELECTRONICS, WE ENSURE QUALITY AND RELIABILITY — FROM RAW MATERIALS TO FINISHED PRODUCTS.”



QUALITY

DOLI products stand for the highest quality, precision, and reliability.

INNOVATION

Since its founding in 1976, DOLI has stood for innovative products and services.

SERVICE

We see ourselves as a reliable partner and therefore provide all our partners with excellent service and support.

SOLUTIONS

DOLI delivers advanced solutions for your testing systems and develops customized systems tailored to specific requirements.

INDEPENDENT

DOLI products and services are brand- and system-independent, ensuring maximum flexibility and seamless integration across a wide range of testing environments.

MATERIAL TESTING – PRECISION BEGINS WITH ELECTRONICS

Materials testing is a key discipline within materials engineering and is used to determine the properties of materials. The goal is to evaluate their suitability for specific applications and to ensure safety during further processing.



Both non-destructive and destructive testing methods are used. Non-destructive methods enable quality inspection without damaging the test specimen.


Destructive testing, on the other hand, provides detailed insights into load limits and safety-relevant material properties.

Standardized mechanical testing methods such as tensile and compression tests, bending tests, and hardness measurements deliver internationally recognized characteristic values.

These values form an essential basis for quality assurance, compliance with standards, as well as research and development in industry and science.

Accredited laboratories around the world rely on advanced mechanical and technological testing solutions. Beyond classical material testing, these include the precise evaluation of joints, weld seams, and complex components.

DOLI systems are trusted by laboratories worldwide and are recognized for their outstanding precision, exceptional reliability, and long-term durability in demanding testing environments.

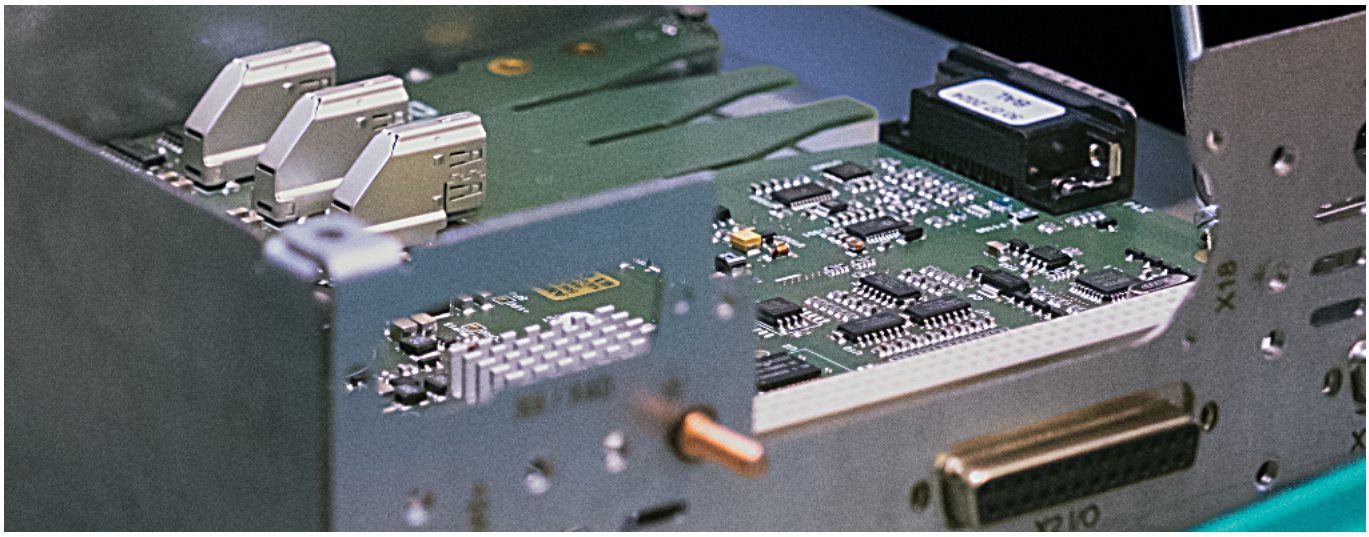

FOR THESE TESTING PROCESSES, THE COMPANY DOLI DEVELOPS THE APPROPRIATE ELECTRONIC MEASUREMENT, CONTROL, AND REGULATION TECHNOLOGY. AS THE CENTRAL FUNCTIONAL MODULE OF THE MATERIALS TESTING MACHINE, IT ENSURES PRECISE DATA ACQUISITION, RELIABLE EVALUATION, AND THE CONTROLLED EXECUTION OF DEMANDING TESTING PROCEDURES.

At DOLI, we transform testing machines into high-performance, fully integrated mechatronic systems. Our advanced controller and electronics solutions form the intelligent core that drives precision, efficiency, and reliability in every application.



Fig.: RMCi (Remote Control)

At the heart of our technology is high-precision data acquisition. DOLI systems use high-resolution A/D conversion to capture even the smallest changes in force and displacement with outstanding accuracy. Superior noise performance, thermal stability, and long-term precision ensure consistently reproducible test results – even under demanding conditions.

Equally critical is our powerful real-time control technology. Whether force-, displacement-, or strain-controlled testing is required, DOLI controllers deliver smooth and stable load application. Intelligent control algorithms enable exact ramp and cycle profiles, highly repeatable test execution, and dependable safety responses when limits are reached.

For complex testing environments, our solutions provide perfectly synchronized multi-channel measurement.
DOLI electronics ensure deterministic, low-latency signal processing across all sensors – enabling precise coordination and seamless system performance.

Safety and compliance are fully integrated into our architecture. With advanced monitoring functions, flexible limit management, and embedded safety logic, DOLI controllers support norm-compliant and secure operation across a wide range of testing standards.

With DOLI control and electronics solutions, testing machines become smarter, more precise, and ready for the challenges of modern material testing.

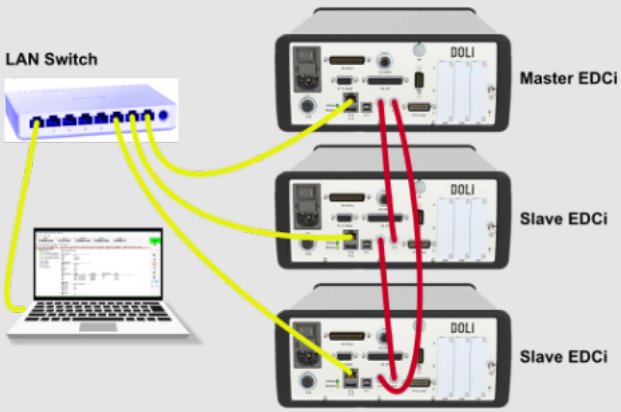


Fig.: X11 / X12 Synchronization of several EDCs


Description

MACHINE SETUP WITH EDCi CONTROL


Our electronics make testing machines smarter, faster, and future-proof – delivering precise results across every industry. The universal testing machine equipped with EDCi control is a high-performance solution for the precise determination of mechanical material properties. It enables a wide range of test methods by subjecting specimens to controlled tensile, compressive, or bending forces while accurately recording their response.


Thanks to its flexible system design, the machine can be used for various materials, including metals, plastics, concrete, and textiles.

The EDCi control system ensures intuitive operation and highly precise regulation of the testing process. Force and displacement sensors continuously capture the specimen's behaviour under load, providing reliable data for in-depth material evaluation.

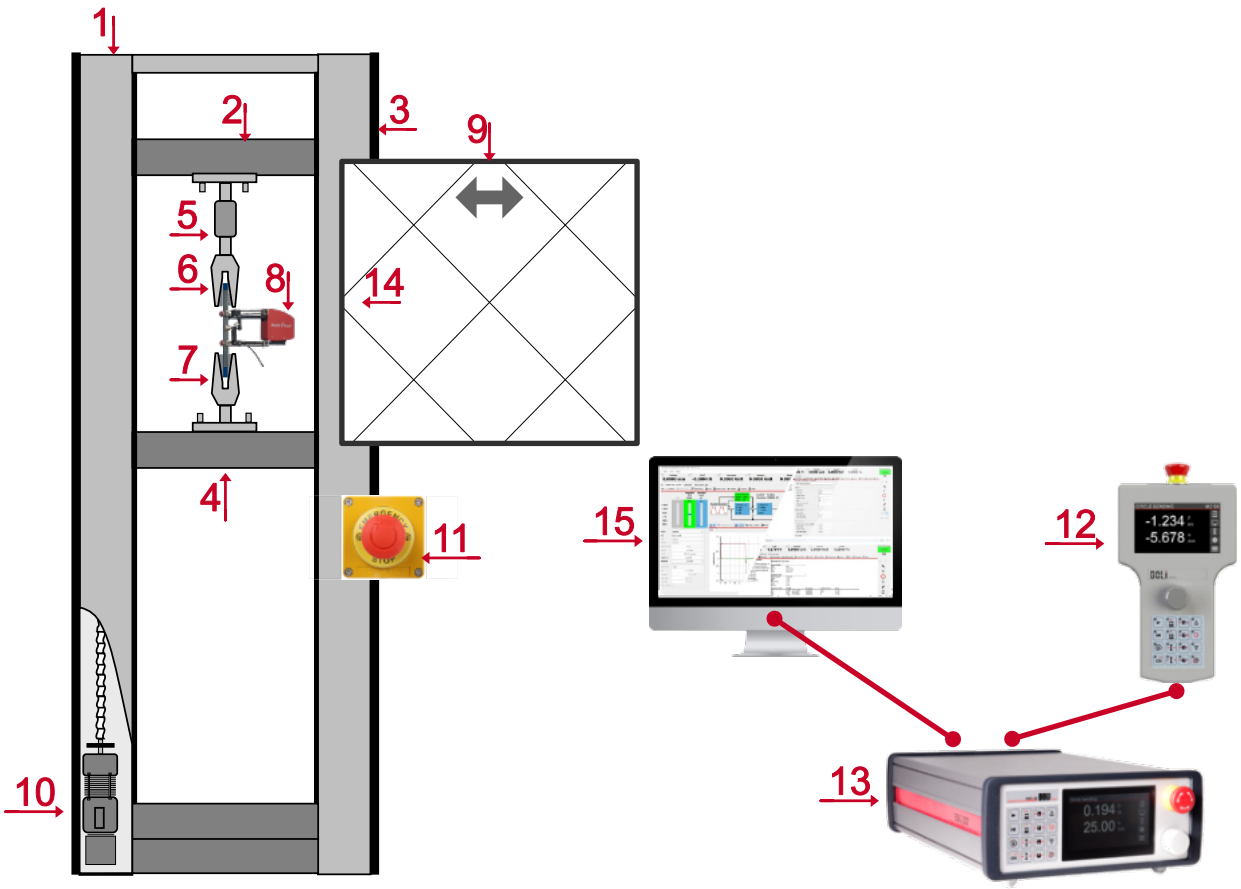

1. Test machine
2. Moving crosshead
3. Load frame
4. Lower crosshead
5. Force sensor / Load cell
6. Clamping device / Fixture
7. Test specimen
8. Strain gauge / Extensometer
9. Safety door
10. Motor
11. Emergency stop
12. DOLI Remote Control
13. DOLI Controller
14. Guard Option
15. Software

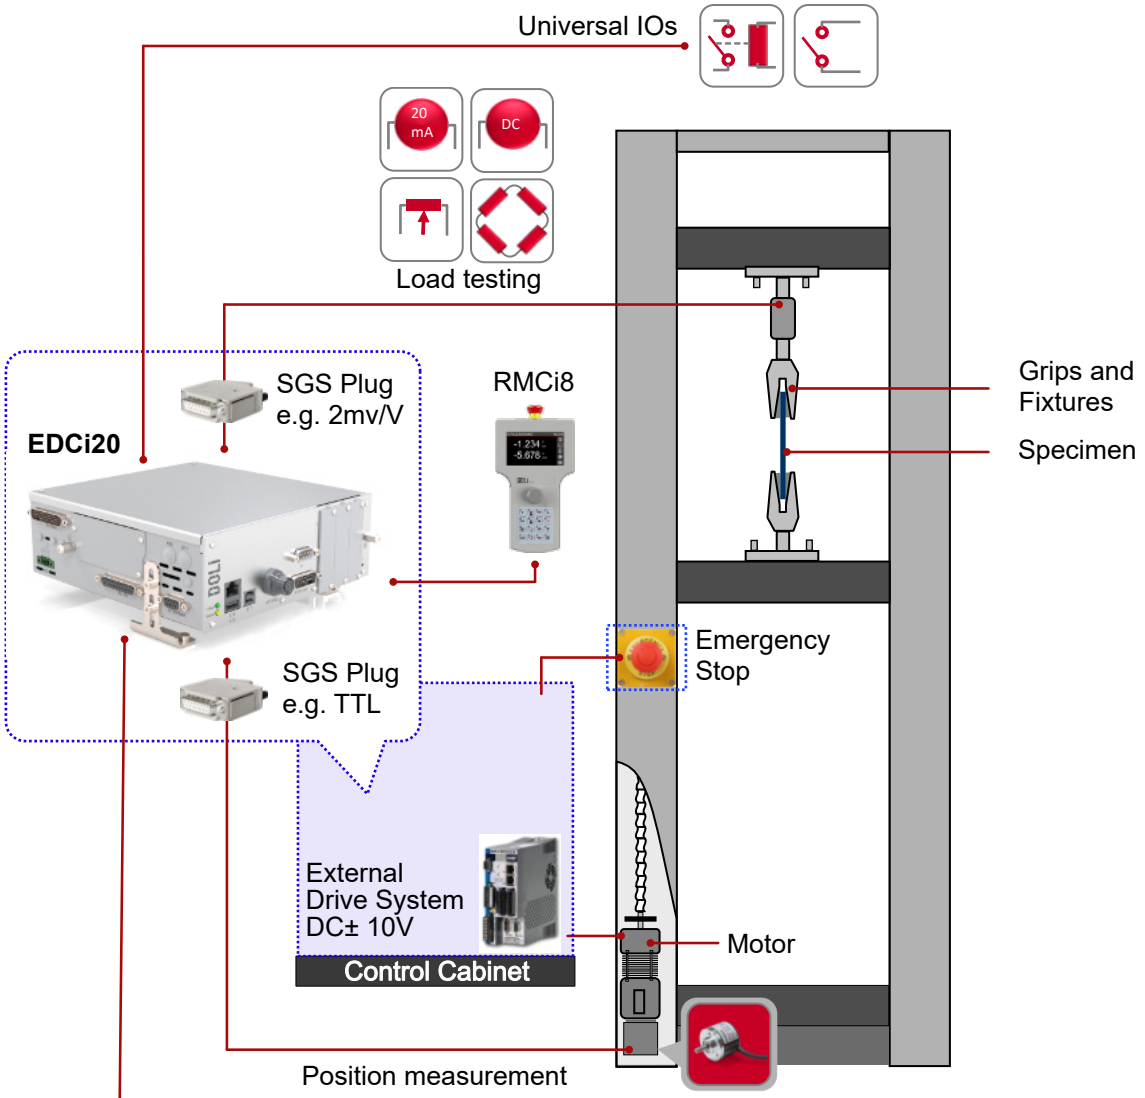

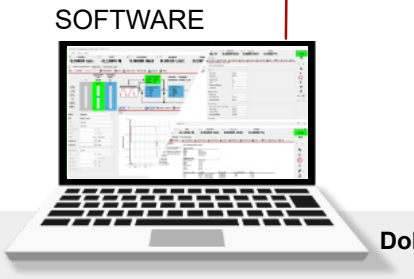

DoPE interface

The DoPE (DOLI Programming Environment) interface is the application programming interface (API) for EDCi controllers from DOLI. It enables the software to control and scan all the functions of the EDCi, and to incorporate them in the customer's own applications.

Range of features:
DoPE gives you direct access to:

- **Motion commands** (e.g. starting, stopping, positioning)
- **Dyn. Cycle (dynamic application)**
- **Sensor data** (readings in real time)
- **Controller parameter**s (configuration and optimisation)

DoPE DLL

DOLI Installation Center
incl.(Test Center Light)

Machine and controlle configuration tool for adjustmend and optoimization of machine / controller for test application

Customer Application Software

Design engineers can use **their own PC programs** or **higher-level control systems** for **communication** with the EDCi.

Description

TECHNICAL DATA COMPARISON EDCi

Function	EDCi10	EDCi15	EDCi20 EDCi22	EDCi50 EDCi52	EDCi70 EDCi72
Maximum system and control loop frequency	1 kHz	1 kHz	2.5 kHz	10 kHz	10 kHz
Minimum system and control loop frequency	1 kHz	1 kHz	1 kHz	1 kHz	1 kHz
Maximum test frequency (DoPEDynCycles command)	2 Hz	5 Hz	5 Hz	500 Hz	500 Hz
CPU VortexDX86 800 MHz	✓	✓	✓	✓	✓
PC communication interface USB 2.0 B full speed	-	✓	✓	✓	✓
PC communication interface LAN 10/100 MBit	✓	✓	✓	✓	✓
Load channel ±10,000,000 steps	✓	✓	✓	✓	-
Incremental encoder: TTL / Line Driver / Sine / SSI	✓	-	✓	✓	✓
Digital inputs/outputs with 24 VDC level	8	-	8	8	8
SerialRS232 sensor interface	-	-	O	O	O
Serial RS485 sensor interface	-	-	O	O	O
iSI extension slots	-	-	3	3	8
iCREEP distribution board: 1xINC Line, 2xINC Sine, RS485, 8xIO	-	✓	-	-	-
Power supply 24 VDC, 1.5 A plus external consumption (EDCix0)	✓	✓	✓	✓	✓
Supply voltage 100 - 240 VAC, 50/60 Hz, 900 VA100-250VAC (EDCix2)	-	-	✓	✓	✓
Internal 24 VDC, 2 A power supply for external devices (EDCix2)	-	-	✓	✓	✓
Cabinet housing (EDCix0)	✓	✓	✓	✓	✓
Desktop housing (EDCix2)	-	-	✓	✓	✓
EDC synchronization of data acquisition and motion control	✓	-	O	O	O
Drive interface: - ±10V command output with ±15Bit resolution - Digital command output, A/B pulse train - I/O's and relays for drive functions	✓	✓	✓	O	O
External DriveBox: - ±10V command output with ±15Bit resolution - Digital command output, A/B pulse train - I/O's and relays for drive functions - 16 digital inputs/outputs with 24V level	-	-	-	O	O
Any external DC / AC power amplifier	O	O	O	O	O
Hydraulic power pack	-	-	O	O	O
Internal servo valve amplifier up to 300mA	-	-	O	O	O
Internal 160W DC power amplifier (EDCix2)	-	-	O	O	O
Internal 320W DC power amplifier (EDCix2)	-	-	O	O	O

✓ Included O Optional - Not possible

TECHNICAL DATA AMPLIFIER DC160/DC320

Function	DC160	DC320
Maximum Power output (30s)	DC160	DC320
Continuous Power output	80W	160W
Maximum output voltage	48V	80V
Maximum output current	3.3A	8A
Limiting current	4.5A (for max. 0.5s)	10A (for max. 2.4s)
Adjustment of limiting current	Twice the value of the adjusted output current, not more than limiting current	
Adjustment of maximum output voltage	adjustable via software	
Adjustment of maximum output current	adjustable via software	
Maximum energy feedback	17W (for 0.5 seconds)	34W (for 2.4 seconds)
Control mode	Current control	
Drive of the command value	PWM	
Switching frequency of the power amplifier	20kHz	
Drive and function check of the relays technics	By the driving controller	
Allowed temperature range	+5°C to +40°C	
Average environmental temperature for 24 hours	Max. +35°C	
Internal fan	Yes	
Voltage supply (single phase alternating current)	115V AC / 230V AC switchable	
Necessary fuse protection of the power socket	3.15AT	6.3AT
Limitation of the inrush current (primary winding)	ca. 3A (t < 50ms)	ca. 6A (t < 50ms)

PLUG ASSIGNMENT

The following table shows a connector overview of the EDCi.

Connector	Function	EDCi10	EDCi15	EDCi20 EDCi22	EDCi50 EDCi52	EDCi70 EDCi7
X2	Universal digital I/O	✓	✓	✓	✓	✓
X4	Drive interface	✓	✓	✓	✓	✓
X5	RMC	✓	✓	✓	✓	✓
X7	Crosshead input INC- or SSI-transducer	✓	(✓)	✓	✓	✓
X11	Synchronization, SYNC In	O	-	O	O	O
X12	Synchronization, SYNC Out	O	-	O	O	O
X13	USB host for USB sticks	✓	✓	✓	✓	✓
X14	Load input	✓	✓	✓	✓	-
X16	LAN PC interface	✓	✓	✓	✓	✓
X17	USB PC interface	-	✓	✓	✓	✓
X18	Motor connection or 10V-Command-Output, Moog valve, internal power amplifier	O	-	O	O	O
X19	24V voltage supply (EDCix0)	✓	✓	✓	✓	✓
X21	iSI extension slot	-	-	✓	✓	✓
X22	iSI extension slot	-	-	✓	✓	✓
X23	iSI extension slot	-	-	✓	✓	✓
X24	iSI extension slot	-	-	-	-	✓
X25	iSI extension slot	-	-	-	-	✓
X26	iSI extension slot	-	-	-	-	✓
X27	iSI extension slot	-	-	-	-	✓
X28	iSI extension slot	-	-	-	-	✓
X40	0 External DriveBox	-	-	-	O	O
X61	Up to four calculated sensors	-	✓	✓	✓	✓
X62	Up to four serial sensors at Y1	-	✓	O	O	O
X63	RMC Digipoti	O	O	O	O	O
Y1	RS232 option (or RS232/RS485 converter) for serial sensors	-	✓	O	O	O

✓ Included O Optional - Not possible

Products

EDCi BUILT-IN DEVICES



Built-in units without keyboard unit and display

EDCi10 built-in unit

The EDCi10 from DOLI is a powerful and cost-effective controller designed for basic static testing applications. It provides stable and precise control of position or force with a 1 kHz control loop and includes a ±10 V drive output for external amplifier connection.

The unit is housed in a robust cabinet and features Ethernet communication, enabling easy integration into existing laboratory or industrial test environment and facilitating data exchange and synchronization. Remote operation via DOLI RMCi is supported.

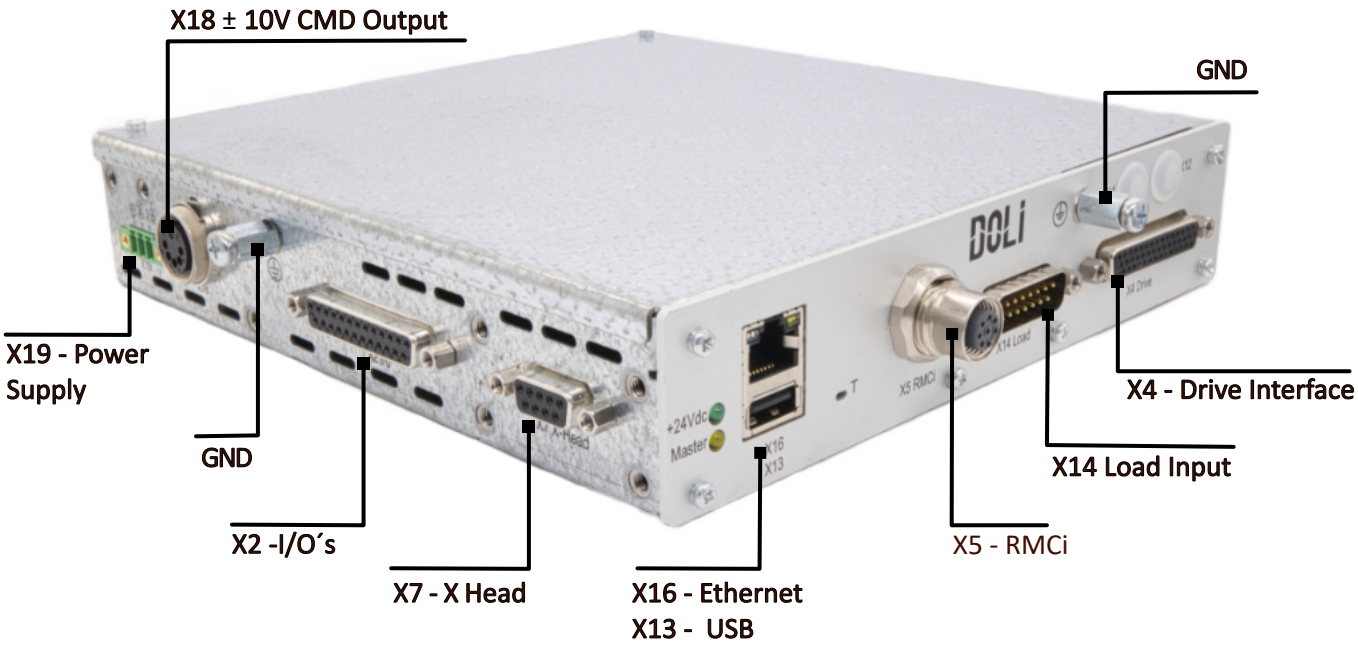


*Fig.: *EDCi10 Controller*

*** The pictures can include optional features.**

Technical Specification / Data		
Dimension [mm]		200 x 190 x 42
Weight [g]		1300
Supply Voltage [V]	24V Power Plug (female)	24
Typ. Power Consumption [W]		30
Typ. Current [A]		1,25
Performance		
System and Data Acquisition Rate [kHz]		1
Test frequency [Hz]		2
Environmental Conditions		
Electromagnetic Compatibility (EMC)		IEC 61326-1:2012
RoHS Compliance		EN 50581
Communication Interfaces		
Universal digital I/O 24V / 100mA	25-pin D-Sub Plug (female)	8 inputs | 8 outputs
USB host for USB sticks		✓
LAN 10/100 MBit	Ethernet Plug	✓
Synchronization of multiple EDCi [1]		
Measurement Inputs / Interfaces		
Incremental / SSI input Transducer ID via I2C + detection	TTL (A/B/Ref, 8MHz, 5V) SSI (24V, 300MHz)	9-pin D-Sub Plug (female) ✓
Load Channel Sensor detection + calibration via I2C, 10V with 24-bit resolution	15-pin D-Sub Plug (male)	✓
Drive interface adjustable 31.25kHz to 4MHz, Output ± 10V with 15-bit resolution	44-pin D-Sub Plug (female)	✓
10V command output	5-pin round DIN plug	✓
Software		
Doli Installation Center		
DoliDoPE, Communication library for programmers		
Processor		
CPU VortexDX86, 800MHz		

[1] optional feature for this device

EDCi10 cabinet housing (without control panel)

Part Number	Product	Part Description
7007347	EDCi-X18	X18 command output (nur x0, x2A, x2)
7010057	SYNCi-SL	Synchronisation mehrerer EDCis, pro EDCi (X11,X12)
7007318	KSYNCi-SL	Kabel (1m) für EDCi-Synchronisation, pro EDCi

EDCi15 iCreep-version built-in unit


without keyboard unit and display

EDCi15 built-in unit - iCreep-version

The EDCi15 is a built-in device for static creep applications, with system and sampling rates of up to 1 kHz. It is supplied with 24 VDC and does not have any iSI expansion slots. Ethernet communication and remote control via the DOLI RMCi enable simple integration and user-friendly operation.

The EDCi15 is designed for static creep testing instruments. It includes the iCREEP distribution board with special designed connectors (no DOLI sensor plugs needed):

- X7 SGS-IL incremental line driver sensor
- X23A/X23C 2 x incremental 1Vpp sine sensors (Heidenhain ST1288/ST3088)
- X2 8 x digital inputs/outputs
- Y1 RS485 serial port for external temperature controllers

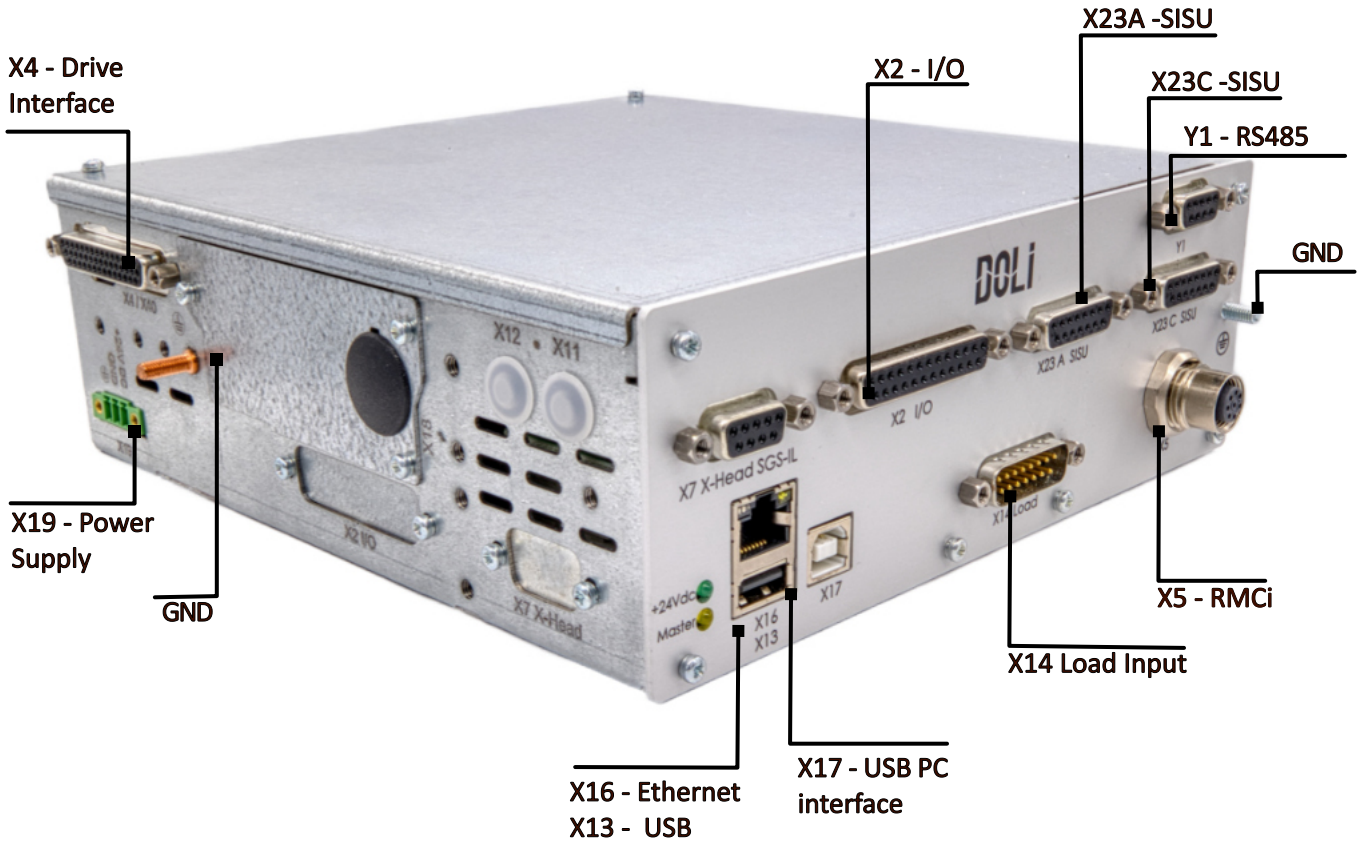

Technical Specification / Data		
Dimension [mm]		200 x 190 x 67
Weight [g]		1400
Supply Voltage [V]	24V Power Plug (female)	24
Typ. Power Consumption [W]		30
Typ. Current [A]		1,25
Performance		
System and Data Acquisition Rate [kHz]		1
Test frequency [Hz]		5
Environmental Conditions		
Electromagnetic Compatibility (EMC)		IEC 61326-1:2012
RoHS Compliance		EN 50581
Communication Interfaces		
Universal digital I/O 24V / 100mA	25-pin D-Sub Plug (female)	8 inputs | 8 outputs
USB 2.0 full speed for PC Communication	USB Type B Plug	✓
USB host for USB sticks		✓
LAN 10/100 MBit	Ethernet Plug	✓
Measurement Inputs / Interfaces		
Load Channel Sensor detection + calibration via I2C, 10V with 24-bit resolution	15-pin D-Sub Plug (male)	✓
Drive interface adjustable 31.25kHz to 4MHz, Output ± 10V with 15-bit resolution	44-pin D-Sub Plug (female)	✓
iCreep Distribution Board		
Incremental line driver sensor A/B/Ref., 8MHz, 5V, 32 Bit pulse counting, Sensor ID (EEPROM)	9-pin D-Sub Plug (female)	✓
Incremental sine wave input A/B/Ref., 50MHz, 32 Bit pulse counting, 1Vpp sine Signal type, Sensor ID (EEPROM)	15-pin D-Sub Plug (female)	✓
Communication for serial sensors RS485, 115,2kBaud, adjustable via Doli Installation Center	9-pin D-Sub Plug (female)	✓
Software		
Doli Installation Center		
DoliDoPE, Communication library for programmers		
Standalone tests with RMCi8		
Processor		
CPU VortexDX86, 800MHz		

[1] optional feature for this device


EDCi15 iCreep cabinet housing (without control panel)

Part Number	Product	Part Description
1000732	EDCi15	EDCi15 iCreep

Built-in units without keyboard unit and display

EDCi20 built-in units

The EDCi20 is a built-in device for static applications, with system and sampling rates of up to 2.5 kHz. It is supplied with 24 VDC and has three iSI expansion slots. Ethernet communication and remote control via the DOLI RMCi enable simple integration and user-friendly operation.

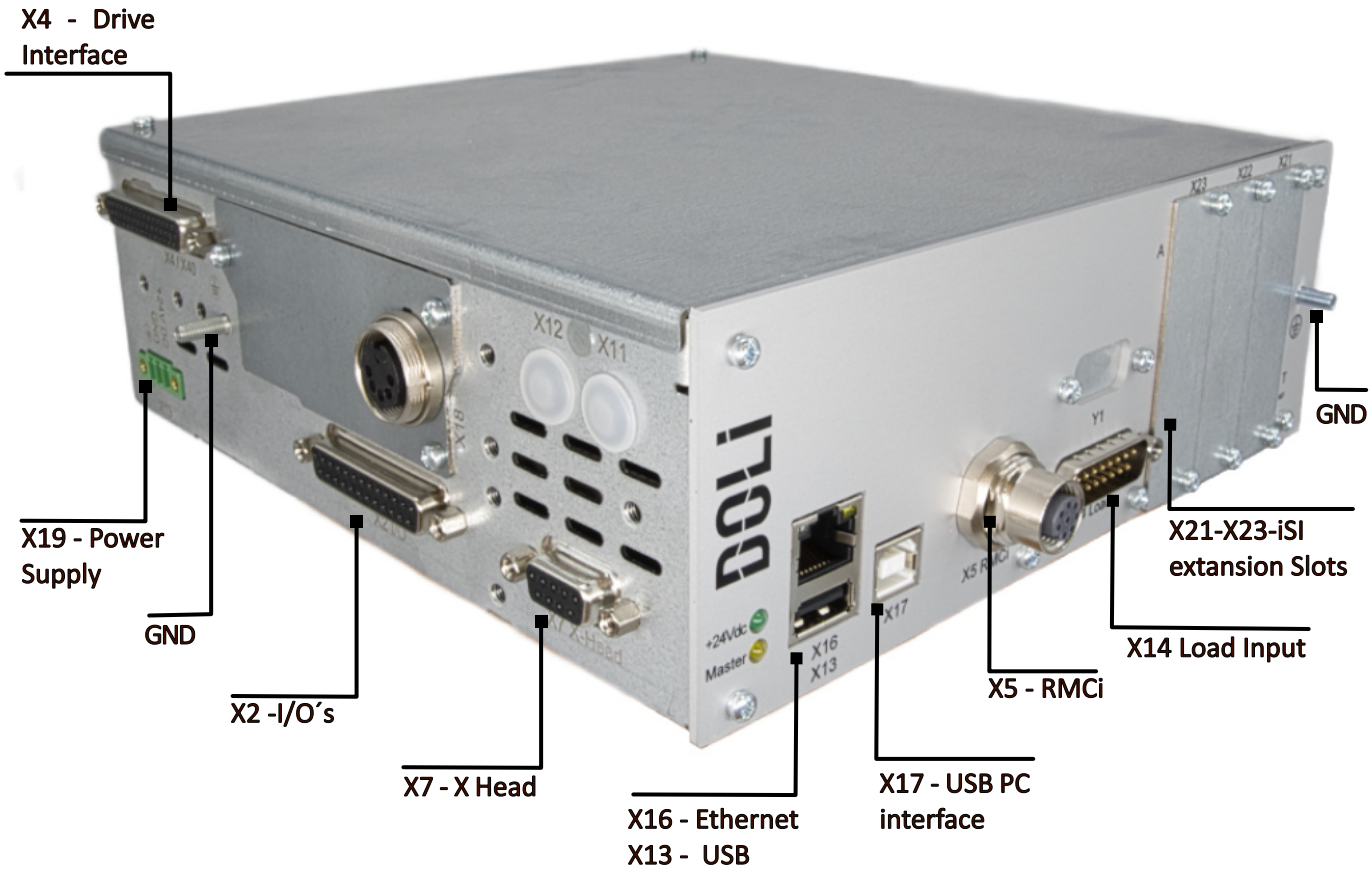

	EDCi20	EDCi20-SV
		
System-und sampling rate [kHz]	2.5	2.5
Max. test frequecy [Hz]	5	5
Output variable	±10 V	300mA
Digitale I/Os	8	8
iSI-interface extansion	3	3
Internal power amplifier	-	-
Resolution	20.000.000 increments	

Technical Specification / Data		
Dimension [mm]		200 x 190 x 67
Weight [g]		1400
Supply Voltage [V]	24V Power Plug (female)	24
Typ. Power Consumption [W]		30
Peak Current [A]		1,25
Performance		
System and Data Acquisition Rate [kHz]		2,5
Test frequency [Hz]		5
Environmental Conditions		
Electromagnetic Compatibility (EMC)		IEC 61326-1:2012
RoHS Compliance		EN 50581
Communication Interfaces		
Universal digital I/O 24V / 100mA	25-pin D-Sub Plug (female)	8 inputs | 8 outputs
USB 2.0 full speed for PC Communication	USB Type B Plug	✓
USB host for USB sticks		✓
LAN 10/100 MBit	Ethernet Plug	✓
RS232/RS485 sensor interface [1] max 115,2 kBaud	9-pin D-Sub Plug (female)	
Measurement Inputs / Interfaces		
Incremental / SSI input Transducer ID via I2C + detection TTL (A/B/Ref, 8MHz, 5V) SSI (24V, 300MHz)	9-pin D-Sub Plug (female)	✓
Load Channel Sensor detection + calibration via I2C, 10V with 24-bit resolution	15-pin D-Sub Plug (male)	✓
Drive interface adjustable 31.25kHz to 4MHz, Output ± 10V with 15-bit resolution	44-pin D-Sub Plug (female)	✓
External DriveBox [1]		
iSI extension slots for additional boards iSI modules		3x
10V command output, current command output [1] for internal servo valve of DC power amplifier	5-pin round DIN plug	
Software		
Doli Installation Center		
DoliDoPE, Communication library for programmers		
Processor		
CPU VortexDX86, 800MHz		

[1] optional feature for this device


EDCi20 cabinet housing (without control panel)

Part Number	Product	Part Description
1000672	EDCi20	EDCi20 ±10V command output
1000673	EDCi20-SV	EDCi20 servo valve amplifier (max. ±300mA)

Built-in units without keyboard unit and display

EDCi50 built-in units

The EDCi50 is a built-in device device for static and dynamic applications, with system and sampling rates of up to 10 kHz. It is supplied with 24 VDC and has three iSI expansion slots. Ethernet communication and remote control via the DOLI RMCi enable simple integration and user-friendly operation.

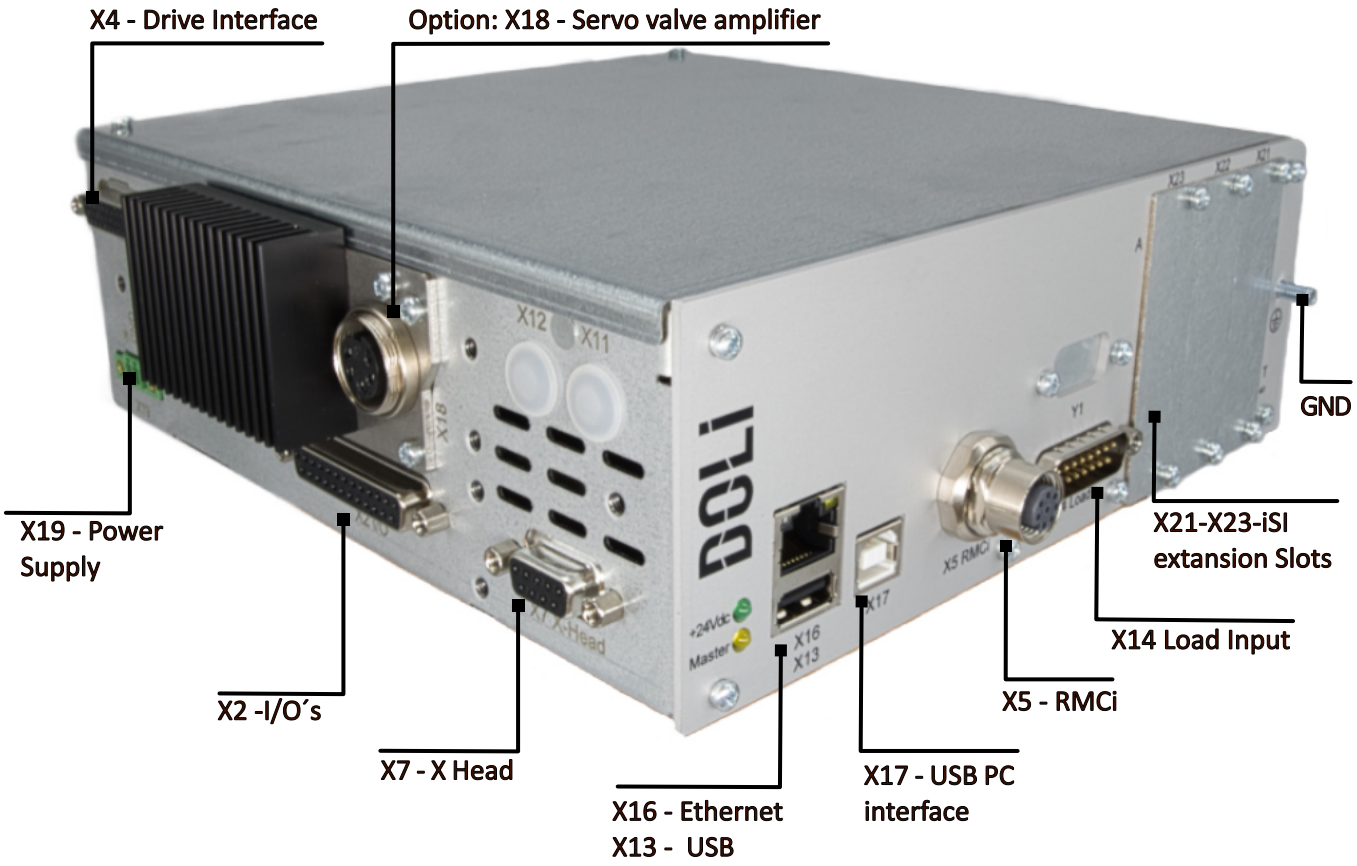

	EDCi50	EDCi50-DB	EDCi50-SV	EDCi50-VD
				
System-und sampling rate [kHz]	10	10	10	10
Max. test frequecy [Hz]	500	500	500	500
Output variable	±10 V	±10 V	300mV	300mV
Digitale I/Os	8	32	8	32
iSI-interface extansion	3	3	3	3
Internal power amplifier	-	-	-	-
Drive Box	-	✓	-	✓
Resolution		20.000.000 increments		

Technical Specification / Data		
Dimension [mm]		200 x 190 x 67
Weight [g]		1700
Supply Voltage [V]	24V Power Plug (female)	24
Typ. Power Consumption [W]		30
Typ. Current [A]		1,25
Performance		
System and Data Acquisition Rate [kHz]		10
Test frequency [Hz]		500
Environmental Conditions		
Electromagnetic Compatibility (EMC)		IEC 61326-1:2012
RoHS Compliance		EN 50581
Communication Interfaces		
Universal digital I/O 24V / 100mA	25-pin D-Sub Plug (female)	8 inputs | 8 outputs
USB 2.0 full speed for PC Communication	USB Type B Plug	
USB host for USB sticks		
LAN 10/100 MBit	Ethernet Plug	✓
RS232/RS485 sensor interface [1] max 115,2 kBaud	9-pin D-Sub Plug (female)	✓
Synchronization of multiple EDCi [1]		✓
Measurement Inputs / Interfaces		
Incremental / SSI input Transducer ID via I2C + detection TTL (A/B/Ref, 8MHz, 5V) SSI (24V, 300MHz)	9-pin D-Sub Plug (female)	
Load Channel Sensor detection + calibration via I2C, 10V with 24-bit resolution	15-pin D-Sub Plug (male)	✓
Drive interface [1] adjustable 31.25kHz to 4MHz, Output ± 10V with 15-bit resolution	44-pin D-Sub Plug (female)	✓
External DriveBox [1]		
iSI extension Slots for additional interface boards iSL modules		3x
10V command output, current command output [1] for internal servo valve of DC power amplifier	5-pin round DIN plug	
Software		
Doli Installation Center		
DoliDoPE, Communication library for programmers		
Processor		
CPU VortexDX86, 800MHz		

[1] optional feature for this device


EDCi50 cabinet housing (without control panel)

Part Number	Product	Part Description
1000482	EDCi50	EDCi50 ±10V command output
1000673	EDCi50-DB	EDCi50 drive box (±10V command output, 16 inputs, 16 outputs)
1000642	EDCi50-SV	EDCi50 servo valve amplifier (max. ±300mA)
1000719	EDCi50-VD	EDCi50 servo valve amplifier (max. ±300mA) and drive box.
Options		
1000649	Drive Box	drive box with ±10V command output, 24 voltI/Os (16 outputs, 16 inputs), connecting terminal .
7007368	EDCi-K1W	connection cable drive box, 1m, M12-M12, angled

Built-in units without keyboard unit and display

EDCi70 built-in devices

The EDCi70 is a built-in device for demanding static and dynamic applications, with system and sampling rates of up to 10 kHz. It is supplied with 24 VDC and has eight iSI expansion slots. Ethernet communication and remote control via the DOLI RMCi enable simple integration and user-friendly operation.

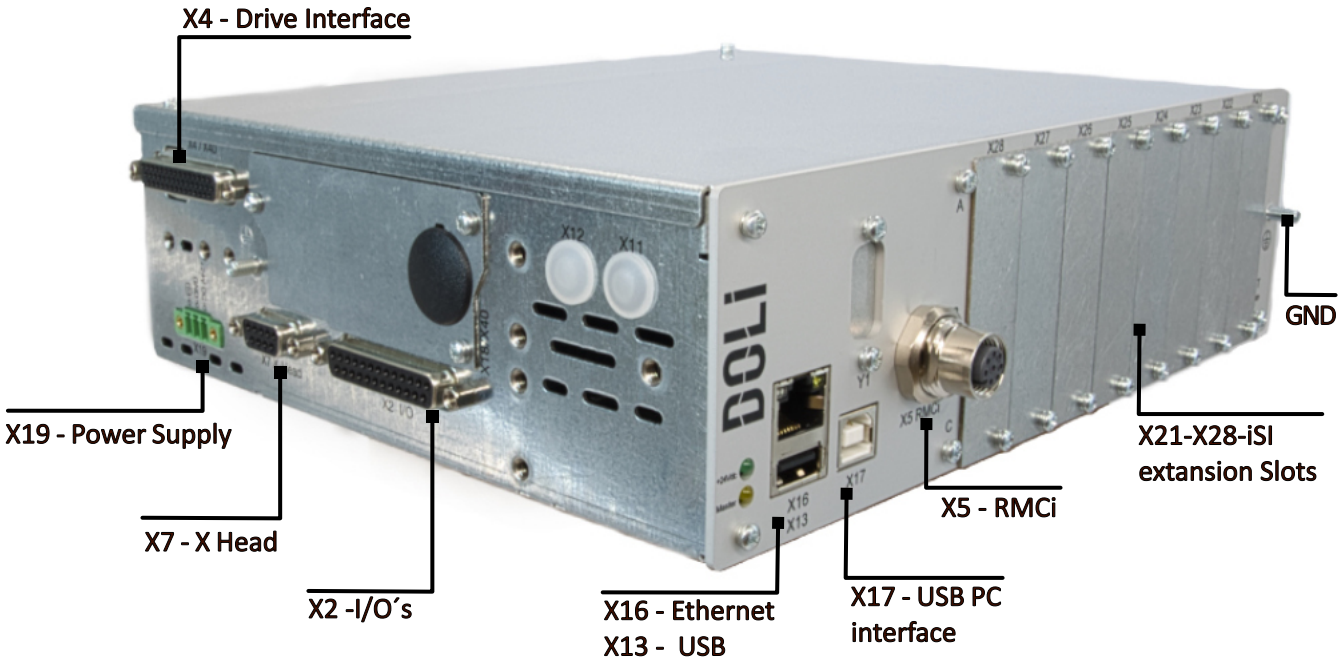

	EDCi70	EDCi70-DB	EDCi70-SV	EDCi70-VD
				
System-und sampling rate [kHz]	10	10	10	10
Max. test frequecy [Hz]	500	500	500	500
Output variable	±10 V	±10 V	300mA	300mV
Digitale I/Os	8	32	8	32
iSI-interface extansion	8	8	8	8
Internal power amplifier	-	-	-	-
Drive Box	-	✓	-	✓
Resolution		20.000.000 increments		

Technical Specification / Data		
Dimension [mm]		200 x 190 x 67
Weight [g]		1700
Supply Voltage [V]	24V Power Plug (female)	24
Typ. Power Consumption [W]		30
Typ. Current [A]		1,25
Performance		
System and Data Acquisition Rate [kHz]		10
Test frequency [Hz]		500
Environmental Conditions		
Electromagnetic Compatibility (EMC)		IEC 61326-1:2012
RoHS Compliance		EN 50581
Communication Interfaces		
Universal digital I/O 24V / 100mA	25-pin D-Sub Plug (female)	8 inputs | 8 outputs
USB 2.0 full speed for PC Communication	USB Type B Plug	✓
USB host for USB sticks		✓
LAN 10/100 MBit	Ethernet Plug	✓
RS232/RS485 sensor interface [1] max 115,2 kBaud	9-pin D-Sub Plug (female)	
Synchronization of multiple EDCi [1]		
Measurement Inputs / Interfaces		
Incremental / SSI input Transducer ID via I2C + detection TTL (A/B/Ref, 8MHz, 5V) SSI (24V, 300MHz)	9-pin D-Sub Plug (female)	✓
Drive interface [1] adjustable 31.25kHz to 4MHz, Output ± 10V with 15-bit resolution	44-pin D-Sub Plug (female)	
External DriveBox [1]		
iSI extension Slots for additional interface boards iSL modules		8x
10V command output, current command output [1] for internal servo valve of DC power amplifier	5-pin round DIN plug	
Software		
Doli Installation Center		
DoliDoPE, Communication library for programmers		
Processor		
CPU VortexDX86, 800MHz		

[1] optional feature for this device

EDCi70 cabinet housing (without control panel)

Part Number	Product	Part Description
1000701	EDCi70	EDCi70 ±10V command output
1000702	EDCi70-DB	EDCi70 drive box (±10V command output, 16 inputs, 16 outputs)
1000703	EDCi70-SV	EDCi70 servo valve amplifier (max. ±300mA)
1000725	EDCi70-VD	EDCi70 servo valve amplifier (max. ±300mA) and drive box.
Options		
1000649	Drive Box	drive box with ±10V command output, 24 voltI/Os (16 outputs, 16 inputs), connecting terminal .
7007368	EDCi-K1W	connection cable drive box, 1m, M12-M12, angled

Products

EDCi TABLETOP DEVICES



EDCi TABLETOP DEVICES

Our EDCi tabletop devices combine the performance of DOLI open-loop and closed-loop control technology with a portable design. They are specially designed for use on material test benches, and can be individually configured using iSI expansion modules and a diverse range of interfaces. Their easy handling and flexible, portable setup at the workplace enable fast access to all connections and controls. The optional Remote Machine Control RMCi ensures easy, user-friendly operation and reliable monitoring.

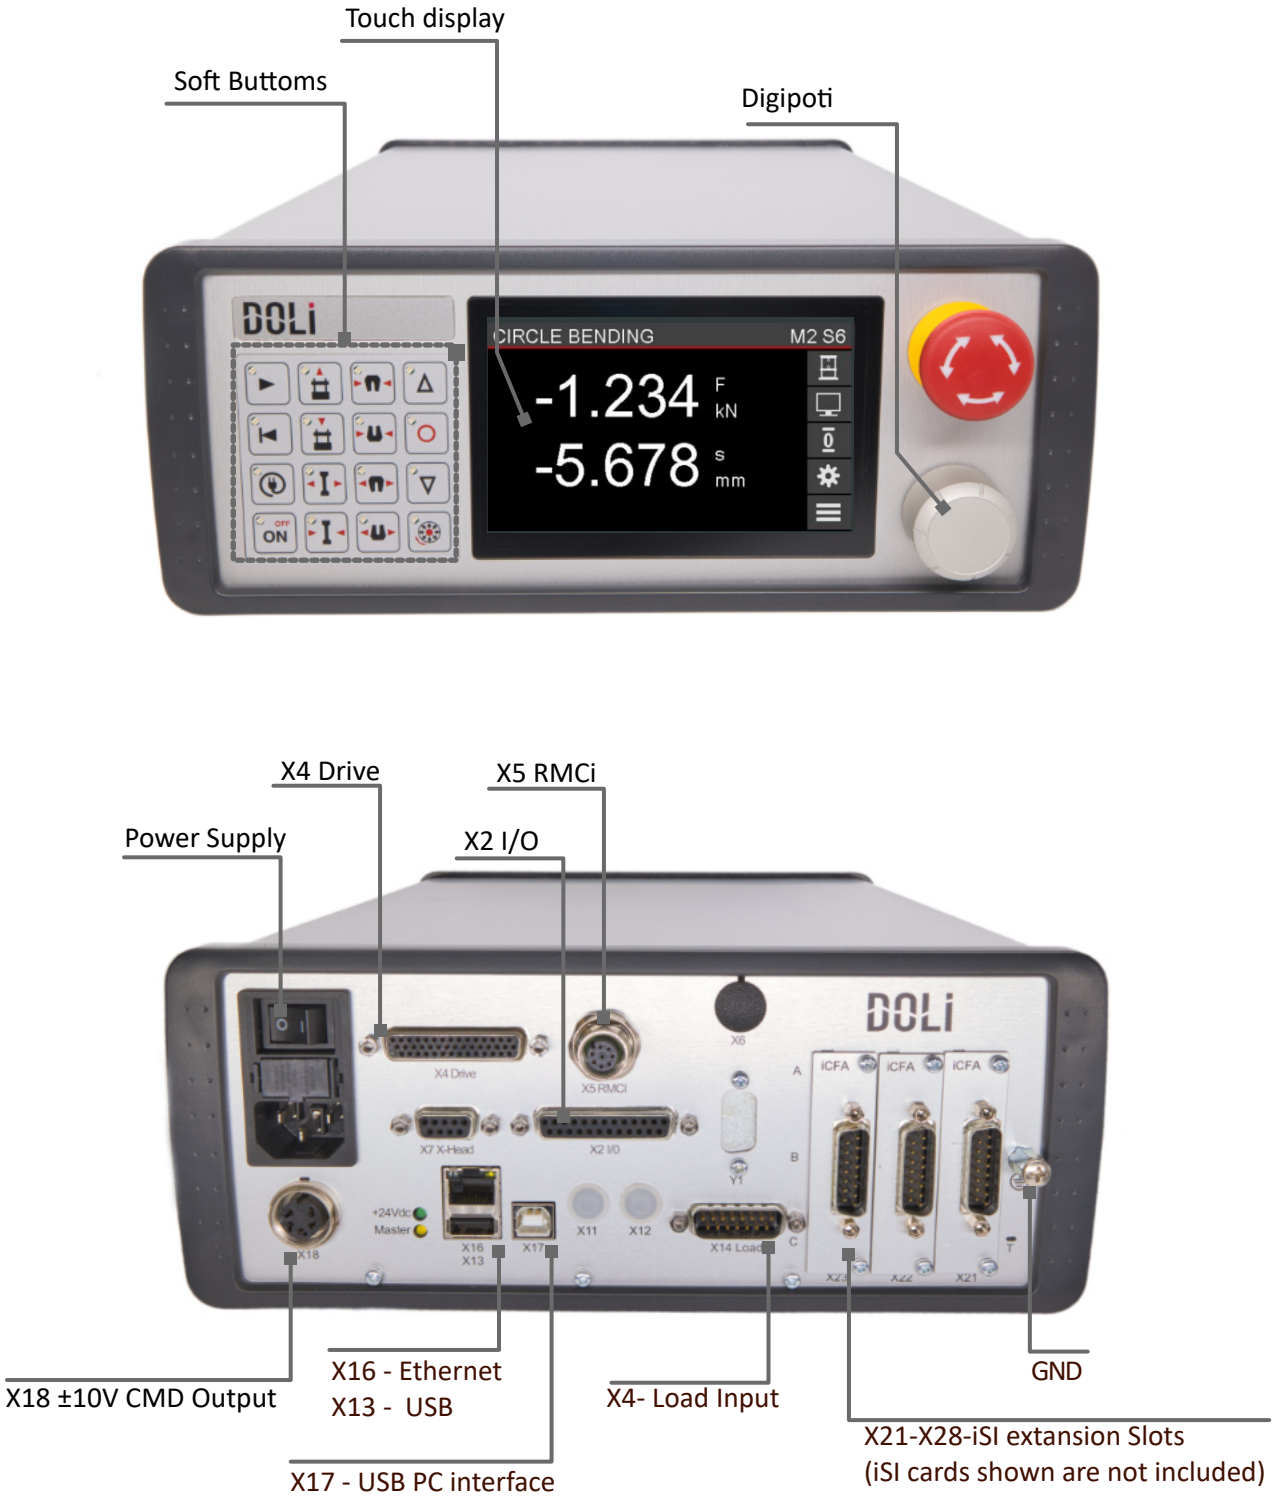






Fig.: Rear view EDCi52 with internal X4/X18 Drive Interface


All information is provided for informational purposes only and without guarantee. See documentation for further details.

Tabletop units without keyboard unit and display

EDCi22 tabletop devices

The EDCi22 is a tabletop device for static applications, with system and sampling rates of up to 2.5 kHz. It is supplied with 230 VAC and has three iSI expansion slots. Ethernet communication and remote control via the DOLI RMCi enable simple integration and user-friendly operation.

	EDCi22	EDCi22-16	EDCi22-32	EDCi20-SV
				
System-und sampling rate [kHz]	2.5	2.5	2.5	2.5
Max. test frequecy [Hz]	5	5	5	5
Output variable	±10 V	±10 V	±10 V	±10 V
Digitale I/Os	8	8	8	32
iSI-interface extansion	3	3	3	3
Internal power amplifier	-	160W	320W	-
Resolution	20.000.000 increments			
Item number	***1000678***	***1000679***	***100068***	***1000681***

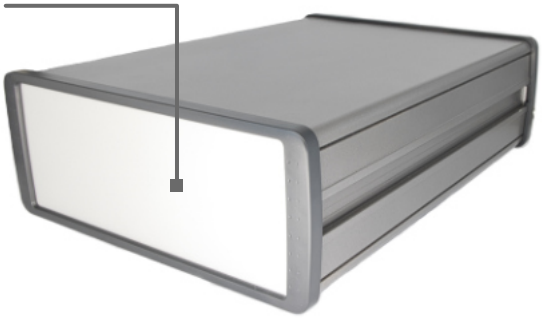

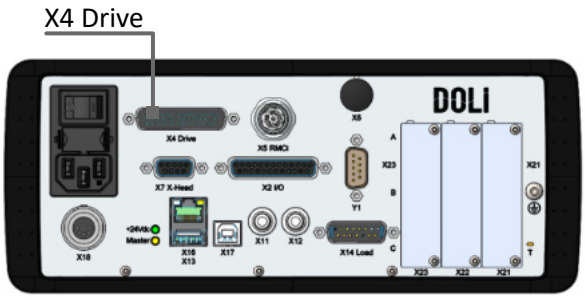


Fig.: Rear view EDCi22 with internal X4/X18 Drive Interface

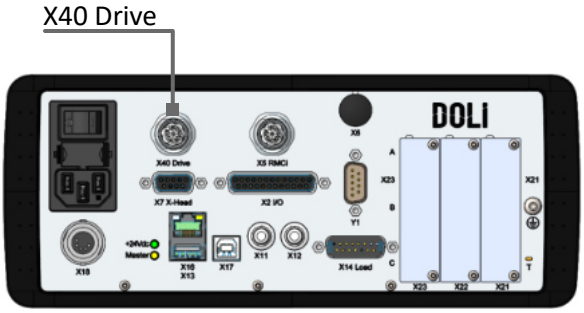


Fig.: Rear view EDCi22 with external X40 DriveBox

Technical Specification / Data		
Dimension [mm]		360 x 255 x 105
Weight [g]		3900
Supply Voltage [V]	IEC C13 connector	100 - 240
Internal power supply for external devices (24 VDC, 2A)		?
Internal DC power amplifier [1] 160W/320W		
Performance		
System and Data Acquisition Rate [kHz]		2,5
Test frequency [Hz]		5
Environmental Conditions		
Electromagnetic Compatibility (EMC)		IEC 61326-1:2012
RoHS Compliance		EN 50581
Communication Interfaces		
Universal digital I/O 24V / 100mA	25-pin D-Sub Plug (female)	8 inputs | 8 outputs
USB 2.0 full speed for PC Communication	USB Type B Plug	?
USB host for USB sticks		?
LAN 10/100 MBit	Ethernet Plug	?
RS232/RS485 sensor interface [1] max 115,2 kBaud	9-pin D-Sub Plug (female)	
Measurement Inputs / Interfaces		
Incremental / SSI input Transducer ID via I2C + detection TTL (A/B/Ref, 8MHz, 5V) SSI (24V, 300MHz)	9-pin D-Sub Plug (female)	?
Load Channel Sensor detection + calibration via I2C, 10V with 24-bit resolution	15-pin D-Sub Plug (male)	?
Drive interface adjustable 31.25kHz to 4MHz, Output ± 10V with 15-bit resolution	44-pin D-Sub Plug (female)	?
External DriveBox [1]		
iSI extension Slots for additional interface boards iSI modules		3x
10V command output, current command output [1] for internal servo valve of DC power amplifier	5-pin round DIN plug	
Software		
Doli Installation Center		
DoliDoPE, Communication library for programmers		
Processor		
CPU VortexDX86, 800MHz		

[1] optional feature for this device

EDCi22 desktop housing (without control panel)

Part Number	Product	Part Description
1000678	EDCi22	EDCi22 ±10V command output, with control panel
1000679	EDCi22-16	EDCi22 160 watt with control panel
1000680	EDCi22-32	EDCi22 320 watt with control panel
1000681	EDCi22-SV	EDCi22 servo valve amplifier (max. ±300mA) with control panel

All information is provided for informational purposes only and without guarantee. See documentation for further details.

Tabletop units with keyboard unit and display

EDCi22A tabletop devices

The EDCi22A is a tabletop device for static applications, with system and sampling rates of up to 2.5 kHz. It is supplied with 230 VAC, has three iSI expansion slots, and is equipped with an integrated display and control unit (RMCi1). The Ethernet interface enables simple integration in existing systems.

	EDCi22A	EDCi22A-16	EDCi22A-32	EDCi22A-SV
				
System-und sampling rate [kHz]	2.5	2.5	2.5	2.5
Max. test frequecy [Hz]	5	5	5	5
Output variable	300mA	±10 V	±10 V	300mA
Digitale I/Os	8	8	8	8
iSI-interface extansion	3	3	3	3
Internal power amplifier	-	160W	320W	-
Resolution	20.000.000 increments			

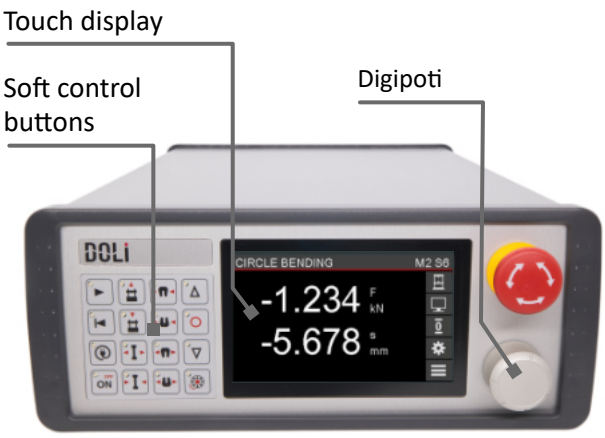


Fig.: Front view EDCi22

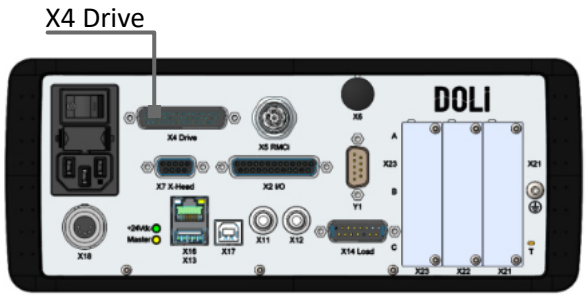


Fig.: Rear view EDCi22 with internal X4/X18 Drive

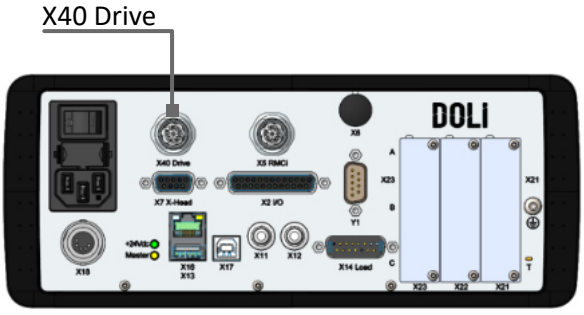


Fig.: Rear view EDCi22 with external X40 DriveBox

Technical Specification / Data		
Dimension [mm]		360 x 255 x 105
Weight [g]		3900
Supply Voltage [V]	IEC C13 connector	100 - 240
Internal power supply for external devices (24 VDC, 2A)		?
Internal DC power amplifier [1] 160W/320W		
Performance		
System and Data Acquisition Rate [kHz]		2,5
Test frequency [Hz]		5
Environmental Conditions		
Electromagnetic Compatibility (EMC)		IEC 61326-1:2012
RoHS Compliance		EN 50581
Communication Interfaces		
Universal digital I/O 24V / 100mA	25-pin D-Sub Plug (female)	8 inputs | 8 outputs
USB 2.0 full speed for PC Communication	USB Type B Plug	?
USB host for USB sticks		?
LAN 10/100 MBit	Ethernet Plug	?
RS232/RS485 sensor interface [1] max 115,2 kBaud	9-pin D-Sub Plug (female)	
Measurement Inputs / Interfaces		
Incremental / SSI input Transducer ID via I2C + detection TTL (A/B/Ref, 8MHz, 5V) SSI (24V, 300MHz)	9-pin D-Sub Plug (female)	?
Load Channel Sensor detection + calibration via I2C, 10V with 24-bit resolution	15-pin D-Sub Plug (male)	?
Drive interface adjustable 31.25kHz to 4MHz, Output ± 10V with 15-bit resolution	44-pin D-Sub Plug (female)	?
External DriveBox [1]		
iSI extension Slots for additional interface boards iSI modules		3x
10V command output, current command output [1] for internal servo valve of DC power amplifier	5-pin round DIN plug	
Software		
Doli Installation Center		
DoliDoPE, Communication library for programmers		
Processor		
CPU VortexDX86, 800MHz		

[1] optional feature for this device






EDCi22 desktop housing with control panel

Part Number	Product	Part Description
1000674	EDCi22A	EDCi22 ±10V command output, with control panel
1000675	EDCi22A-16	EDCi22 160 watt with control panel
1000676	EDCi22A-32	EDCi22 320 watt with control panel
1000677	EDCi22A-SV	EDCi22 servo valve amplifier (max. ±300mA) with control panel


Tabletop units without keyboard unit and display

EDCi52 tabletop devices

The EDCi52 is a tabletop device for static and dynamic applications, with system and sampling rates of up to 10 kHz. It is supplied with 230 VAC and has three iSI expansion slots. Ethernet communication and remote control via the DOLI RMCi enable simple integration and user-friendly operation.

	EDCi52	EDCi52-DB	EDCi52-16	EDCi52-32	EDCi52-SV
					
System-und sampling rate [kHz]	10	10	10	10	10
Max. test frequecy [Hz]	500	500	500	500	500
Output variable	±10 V	±10 V	±10 V	±10 V	300mA
Digitale I/Os	8	32	8	8	8
iSI-interface extansion	3	3	3	3	3
Internal power amplifier	-	-	160W	320W	-
Drive Box	-	✓	-	-	-
Resolution	20.000.000 increments				

Tabletop units with keyboard unit and display

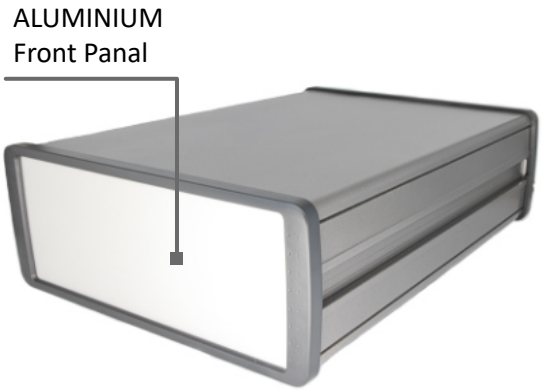

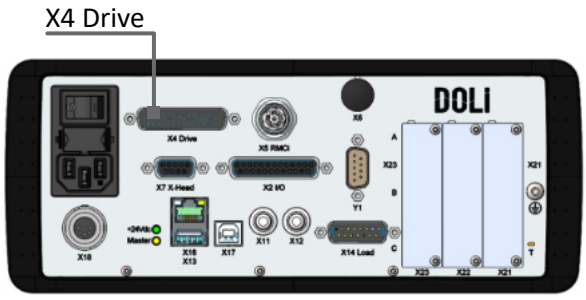


Fig.: Rear view EDCi52 with internal X4/X18 Drive Interface

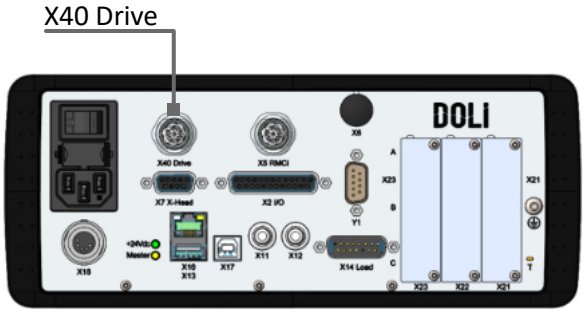


Fig.: Rear view EDCi52 with external X40 DriveBox

Technical Specification / Data		
Dimension [mm]		360 x 255 x 105
Weight [g]		3900
Supply Voltage [V]	IEC C13 connector	100 - 240
Internal power supply for external devices (24 VDC, 2A)		?
Performance		
System and Data Acquisition Rate [kHz]		10
Test frequency [Hz]		500
Environmental Conditions		
Electromagnetic Compatibility (EMC)		IEC 61326-1:2012
RoHS Compliance		EN 50581
Communication Interfaces		
Universal digital I/O 24V / 100mA	25-pin D-Sub Plug (female)	8 inputs | 8 outputs
USB 2.0 full speed for PC Communication	USB Type B Plug	✓
USB host for USB sticks		✓
LAN 10/100 MBit	Ethernet Plug	✓
RS232/RS485 sensor interface [1] max 115,2 kBaud	9-pin D-Sub Plug (female)	
Synchronization of multiple EDCi [1]		
Measurement Inputs / Interfaces		
Incremental / SSI input Transducer ID via I2C + detection	TTL (A/B/Ref, 8MHz, 5V) SSI (24V, 300MHz)	9-pin D-Sub Plug (female) ✓
Load Channel Sensor detection + calibration via I2C, 10V with 24-bit resolution	15-pin D-Sub Plug (male)	✓
Drive interface [1] adjustable 31.25kHz to 4MHz, Output ± 10V with 15-bit resolution	44-pin D-Sub Plug (female)	
External DriveBox [1]		
iSI extension Slots for additional interface boards iSL modules		3x
10V command output, current command output [1] for internal servo valve of DC power amplifier	5-pin round DIN plug	
Software		
Doli Installation Center		
DoliDoPE, Communication library for programmers		
Processor		
CPU VortexDX86, 800MHz		

[1] optional feature for this device

EDCi52 desktop housing (without control panel)

Part Number	Product	Part Description
1000665	EDCi52	EDCi52 ±10V command output, without contro panel
1000666	EDCi52-DB	EDCi52 drive box (±10V command output, 16 inputs, 16 outputs) without control panel
1000667	EDCi52-16	EDCi52 160 watt without control panel
1000668	EDCi52-32	EDCi52 320 watt without control panel
1000669	EDCi52-SV	EDCi52 servo valve amplifier (max. ±300mA) without control panel
Options		
1000649	Drive Box	drive box with ±10V command output, 24 voltI/Os (16 outputs, 16 inputs), connecting terminal .
7007368	EDCi-K1W	connection cable drive box, 1m, M12-M12, angled

EDCi52A tabletop devices

EDCi52A ist ein tabletop device for static and dynamic applications, with system and sampling rates of up to 10 kHz. It is supplied with 230 VAC, has three iSI expansion slots, and is equipped with an integrated display and control unit (RMCi1).

The Ethernet interface enables simple integration in existing systems.

	EDCi52A	EDCi52A-DB	EDCi52A-16	EDCi52A-32	EDCi52A-SV
					
System-und sampling rate [kHz]	10	10	10	10	10
Max. test frequecy [Hz]	500	500	500	500	500
Output variable	±10 V	±10 V	±10 V	±10 V	300mA
Digitale I/Os	8	32	8	8	8
iSI-interface extansion	3	3	3	3	3
Internal power amplifier	-	-	160W	320W	-
Resolution	20.000.000 increments				
Item number	***1000643***	***1000644***	***1000645***	***1000646***	***1000647***

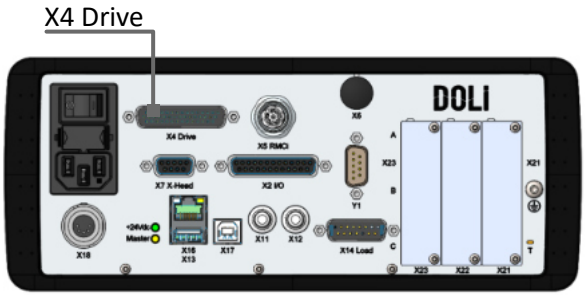


Fig.: Rear view EDCi52 with internal X4/X18 Drive

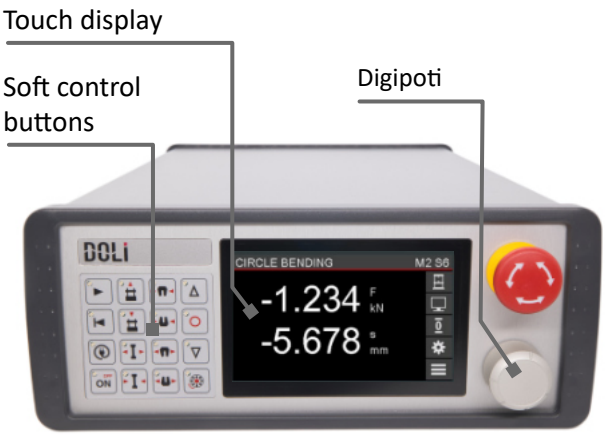


Fig.: Front view EDCi52

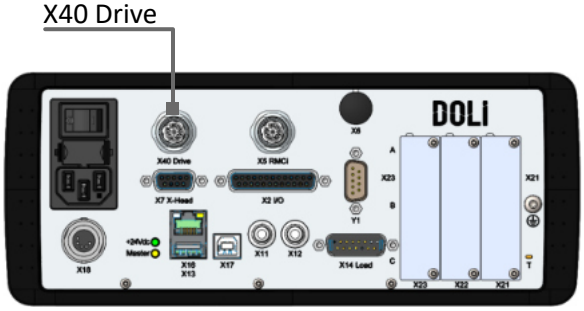


Fig.: Rear view EDCi52 with external X40 DriveBox

Technical Specification / Data		
Dimension [mm]		360 x 255 x 105
Weight [g]		3900
Supply Voltage [V]	IEC C13 connector	100 - 240
Internal power supply for external devices (24 VDC, 2A)		?
Performance		
System and Data Acquisition Rate [kHz]		10
Test frequency [Hz]		500
Environmental Conditions		
Electromagnetic Compatibility (EMC)		IEC 61326-1:2012
RoHS Compliance		EN 50581
Communication Interfaces		
Universal digital I/O 24V / 100mA	25-pin D-Sub Plug (female)	8 inputs | 8 outputs
USB 2.0 full speed for PC Communication	USB Type B Plug	✓
USB host for USB sticks		✓
LAN 10/100 MBit	Ethernet Plug	✓
RS232/RS485 sensor interface [1] max 115,2 kBaud	9-pin D-Sub Plug (female)	
Synchronization of multiple EDCi [1]		
Measurement Inputs / Interfaces		
Incremental / SSI input Transducer ID via I2C + detection	TTL (A/B/Ref, 8MHz, 5V) SSI (24V, 300MHz)	9-pin D-Sub Plug (female) ✓
Load Channel Sensor detection + calibration via I2C, 10V with 24-bit resolution	15-pin D-Sub Plug (male)	✓
Drive interface [1] adjustable 31.25kHz to 4MHz, Output ± 10V with 15-bit resolution	44-pin D-Sub Plug (female)	
External DriveBox [1]		
iSI extension Slots for additional interface boards iSL modules		3x
10V command output, current command output [1] for internal servo valve of DC power amplifier	5-pin round DIN plug	
Software		
Doli Installation Center		
DoliDoPE, Communication library for programmers		
Processor		
CPU VortexDX86, 800MHz		

[1] optional feature for this device






EDCi52 desktop housing with control panel


Part Number	Product	Part Description
1000643	EDCi52A	EDCi52 ±10V command output, without contro panel
1000644	EDCi52A-DB	EDCi52 drive box (±10V command output, 16 inputs, 16 outputs) without control panel
1000645	EDCi52A-16	EDCi52 160 watt without control panel
1000646	EDCi52A-32	EDCi52 320 watt without control panel
1000647	EDCi52A-SV	EDCi52 servo valve amplifier (max. ±300mA) without control panel
Options		
1000649	Drive Box	drive box with ±10V command output, 24 voltI/Os (16 outputs, 16 inputs), connecting terminal .
7007368	EDCi-K1W	connection cable drive box, 1m, M12-M12, angled

Tabletop units without keyboard unit and display

EDCi72 tabletop devices

The EDCi72 is a tabletop device for demanding static and dynamic applications, with system and sampling rates of up to 10 kHz. It is supplied with 230 VAC and has eight iSI expansion slots. Ethernet communication and remote control via the DOLI RMCi enable simple integration and user-friendly operation.

	EDCi72	EDCi72-DB	EDCi72-16	EDCi72-32	EDCi72-SV
					
System-und sampling rate [kHz]	10	10	10	10	10
Max. test frequecy [Hz]	500	500	500	500	500
Output variable	±10 V	±10 V	±10 V	±10 V	300mA
Digitale I/Os	8	32	8	8	8
iSI-interface extansion	8	8	8	8	8
Internal power amplifier	-	-	160W	320W	-
Resolution	20.000.000 increments				

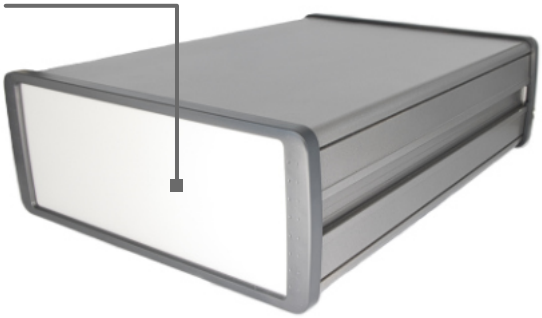

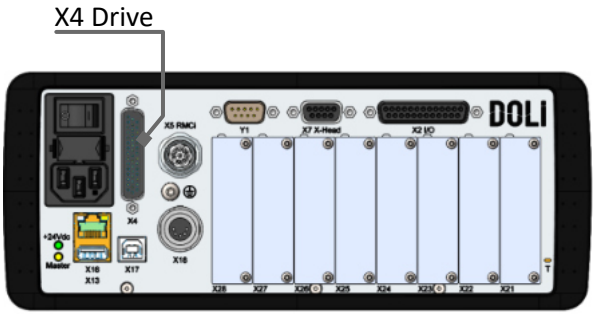


Fig.: Rear view EDCi52 with internal X4/X18 Drive

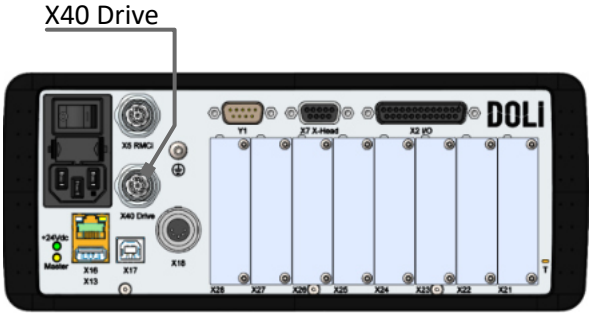


Fig.: Rear view EDCi72 with external X40 DriveBox

Technical Specification / Data		
Dimension [mm]		360 x 255 x 105
Weight [g]		3900
Supply Voltage [V]	IEC C13 connector	100 - 240
Internal power supply for external devices (24 VDC, 2A)		?
Performance		
System and Data Acquisition Rate [kHz]		10
Test frequency [Hz]		500
Environmental Conditions		
Electromagnetic Compatibility (EMC)		IEC 61326-1:2012
RoHS Compliance		EN 50581
Communication Interfaces		
Universal digital I/O 24V / 100mA	25-pin D-Sub Plug (female)	8 inputs | 8 outputs
USB 2.0 full speed for PC Communication	USB Type B Plug	✓
USB host for USB sticks		✓
LAN 10/100 MBit	Ethernet Plug	✓
RS232/RS485 sensor interface [1] max 115,2 kBaud	9-pin D-Sub Plug (female)	
Synchronization of multiple EDCi [1]		
Measurement Inputs / Interfaces		
Incremental / SSI input Transducer ID via I2C + detection TTL (A/B/Ref, 8MHz, 5V) SSI (24V, 300MHz)	9-pin D-Sub Plug (female)	✓
Drive interface [1] adjustable 31.25kHz to 4MHz, Output ± 10V with 15-bit resolution	44-pin D-Sub Plug (female)	
External DriveBox [1]		
iSI extension Slots for additional interface boards iSL modules		8x
10V command output, current command output [1] for internal servo valve of DC power amplifier	5-pin round DIN plug	
Software		
Doli Installation Center		
DoliDoPE, Communication library for programmers		
Processor		
CPU VortexDX86, 800MHz		

[1] optional feature for this device

EDCi72 desktop housing (without control panel)

Part Number	Product	Part Description
1000701	EDCi72	EDCi70 ±10V command output
1000702	EDCi70-DB	EDCi70 drive box (±10V command output, 16 inputs, 16 outputs)
1000703	EDCi70-SV	EDCi70 servo valve amplifier (max. ±300mA)
1000725	EDCi70-VD	EDCi70 servo valve amplifier (max. ±300mA) and drive box
Options		
1000649	Drive Box	drive box with ±10V command output, 24 voltI/Os (16 outputs, 16 inputs), connecting terminal .
7007368	EDCi-K1W	connection cable drive box, 1m, M12-M12, angled

Tabletop units with keyboard unit and display

EDCi72A tabletop devices

The EDCi72A is a tabletop device for demanding static and dynamic applications, with system and sampling rates of up to 10 kHz. It is supplied with 230 VAC, has eight iSI expansion slots, and is equipped with an integrated display and control unit (RMCi1). The Ethernet interface enables simple integration in existing systems.

	EDCi72A	EDCi72A-DB	EDCi72A-16	EDCi72A-32	EDCi72A-SV
					
System-und sampling rate [kHz]	10	10	10	10	10
Max. test frequecy [Hz]	500	500	500	500	500
Output variable	±10 V	±10 V	±10 V	±10 V	300mA
Digitale I/Os	8	32	8	8	8
iSI-interface extansion	8	8	8	8	8
Internal power amplifier	-	-	160W	320W	-
Resolution	20.000.000 increments				

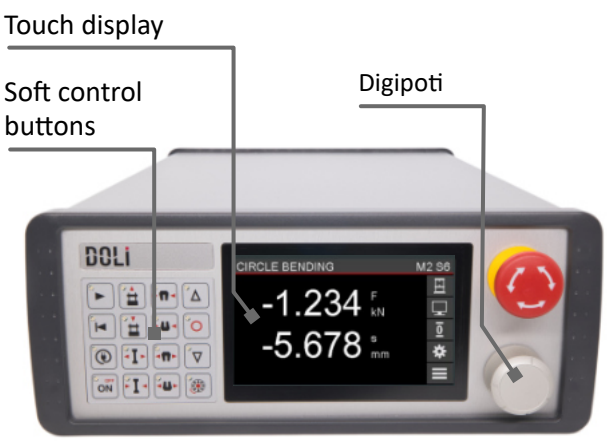


Fig.: Front view EDCi52

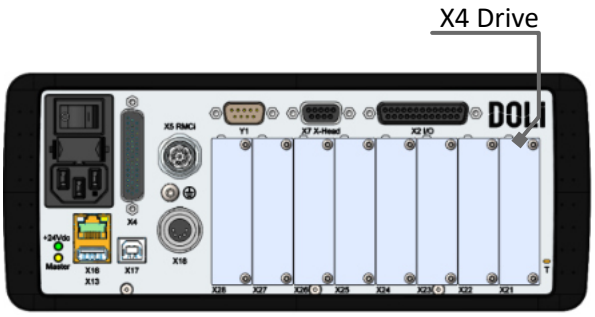


Fig.: Rear view EDCi52 with internal X4/X18 Drive

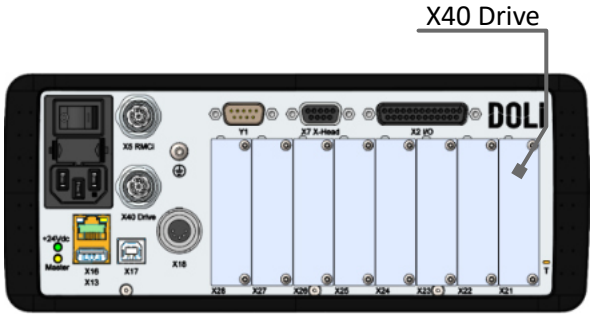


Fig.: Rear view EDCi72 with external X40 DriveBox

Technical Specification / Data		
Dimension [mm]		360 x 255 x 105
Weight [g]		3900
Supply Voltage [V]	IEC C13 connector	100 - 240
Internal power supply for external devices (24 VDC, 2A)		?
Performance		
System and Data Acquisition Rate [kHz]		10
Test frequency [Hz]		500
Environmental Conditions		
Electromagnetic Compatibility (EMC)		IEC 61326-1:2012
RoHS Compliance		EN 50581
Communication Interfaces		
Universal digital I/O 24V / 100mA	25-pin D-Sub Plug (female)	8 inputs | 8 outputs
USB 2.0 full speed for PC Communication	USB Type B Plug	✓
USB host for USB sticks		✓
LAN 10/100 MBit	Ethernet Plug	✓
RS232/RS485 sensor interface [1] max 115,2 kBaud	9-pin D-Sub Plug (female)	
Synchronization of multiple EDCi [1]		
Measurement Inputs / Interfaces		
Incremental / SSI input Transducer ID via I2C + detection TTL (A/B/Ref, 8MHz, 5V) SSI (24V, 300MHz)	9-pin D-Sub Plug (female)	✓
Drive interface [1] adjustable 31.25kHz to 4MHz, Output ± 10V with 15-bit resolution	44-pin D-Sub Plug (female)	
External DriveBox [1]		
iSI extension Slots for additional interface boards iSL modules		8x
10V command output, current command output [1] for internal servo valve of DC power amplifier	5-pin round DIN plug	
Software		
Doli Installation Center		
DoliDoPE, Communication library for programmers		
Processor		
CPU VortexDX86, 800MHz		
[1] optional feature for this device		

EDCi72 desktop housing with control panel

Part Number	Product	Part Description
1000704	EDCi72A	EDCi72 ±10V command output, with control panel
1000705	EDCi72A-DB	EDCi72 drive box (±10V command output, 16 inputs, 16 outputs) with control panel
1000706	EDCi72A-16	EDCi72 160 watt with control panel
1000707	EDCi72A-32	EDCi72 320 watt with control panel
1000708	EDCi72A-SV	EDCi72 servo valve amplifier (max. ±300mA) with control panel
Options		
1000649	Drive Box	drive box with ±10V command output, 24 voltI/Os (16 outputs, 16 inputs), connecting terminal .
7007368	EDCi-K1W	connection cable drive box, 1m, M12-M12, angled

DEVICE OPTIONS

Installation only at the factory

Part Number	Product	Part Description
7007347	EDCi-X18	X18 connector for +-10V command output (only x0, x2A, x2)

Part Number	Product	Part Description
1000390	K485	RS485 interface for serial senors and temperature controller (Y1)

Part Number	Product	Part Description
7009414	RS232A	RS232 interface for serial sensors (Y1)

Synchronization of several EDCs

This option enables synchronization of data acquisition and motion control across multiple EDC systems.
All required signals are transmitted via a serial RS485 bus, with up to 8 EDC units connected.

The master EDC generates the system clock (System Time) along with additional control signals.
Proper synchronization can be monitored via the status indicators of the EDC units.

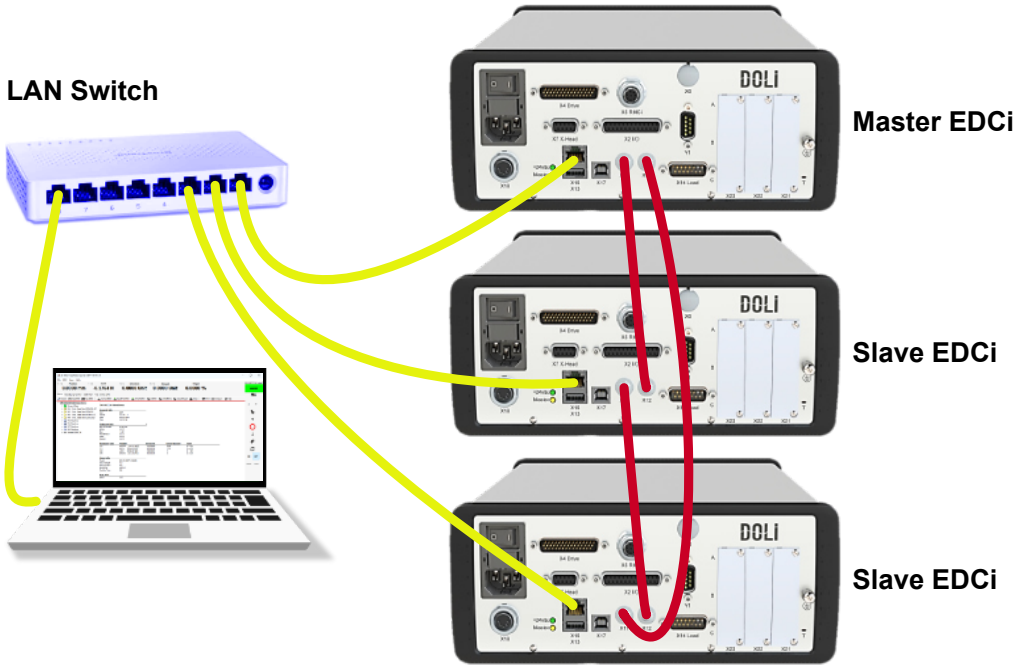


Fig.: X11 / X12 Synchronization of several EDCs

Part Number	Product	Part Description
7010057	SYNCi-SL	synchronisation of several EDCis, per EDCi (X11, X12)
7007318	KSYNCi-SL	cable (1m) for EDCi synchronisation, per EDCi
7005199	LAN-K1	LAN cross-over-patch-cable (double screen, cat.5), 1m
7005200	LAN-K3	LAN cross-over-patch-cable (double screen, cat.5), 3m
7005201	LAN-K5	LAN cross-over-patch-cable (double screen, cat.5), 5m
7005202	LAN-K10	LAN cross-over-patch-cable (double screen, cat.5), 10m

ACCESSORIES

Part Number	Product	Part Description
7005923	EDCBL	blank front panel for desktop housing (EDCx2)
7003922	S_VAM	plug 5-pin for servovalves and motors (X18)
7003923	S_X18	plug 5-pin for ±10V-command output (X18)
1000745	S_iIO	plug 25-pin for iSI-Modul iIO
7007320	EDCi-X4	plug 44-pin for drive interface (X4)

Part Number	Product	Part Description
7005199	LAN-K1	LAN cross-over-patch-cable (double screen, cat.5), 1m
7005200	LAN-K3	LAN cross-over-patch-cable (double screen, cat.5), 3m
7005201	LAN-K5	LAN cross-over-patch-cable (double screen, cat.5), 5m
7005202	LAN-K10	LAN cross-over-patch-cable (double screen, cat.5), 10m
7005203	USB-K1	USB-cable, 1 m
7005204	USB-K2	USB-cable, 1,8 m
7005206	USB-K3	USB-cable, 3 m
7005205	USB-K5	USB-cable, 5 m

Accessories

Part Number	Product	Part Description
1000003	220PS	plug 3-pin for 24 volt power supply
7009040	EDCi-X5	short-circuit plug M12 RMCi (X5)
7007321	EDCi-KSIM	simulation cable set of way, strength, stretch (test cable X4-X7 and iADA-X14)
7009450	iINC-A	Cable adapter from iINC/iINCX (EDCi) to 4INC/2INC (EDC60/120/v220/v580)
7009449	iIO-A	Cable adapter from iIO (EDCi) to I/O card (EDC60/120/v220/v580)
1000754	X4-A-EDC	Adapter X4 (EDCi) -> X4 or X28a (EDC60/120/220 up to Rev. b/580 up to Rev. a)
1000752	X4-A-EDCv	Adapter X4 (EDCi) -> X4 or X28a (EDCv220 from Rev. c / EDCv580 from Rev. b)
1000753	X4-A-EDCvLemo	Adapter X4 (EDCi) -> X4 or X28a with emergency stop via Lemo connector (EDCv220 from Rev. c/v580 from Rev. b)

DriveBox

The DriveBox is an external drive interface, designed for top hat rail mounting in a cabinet.

Features:
External drive interface, compatible to the EDCi X4 internal drive interface.

- 16 digital outputs (+12 - 24 VDC over ext. power supply, 0.5 A each output).
- 16 digital 24 VDC inputs.
- Spring-cage terminal blocks.
- Top hat/DIN rail mounting.
- M12 cable connection to EDCi.
- Decoupled to EDCi,
  supply voltage + 24 VDC, 0,3 A.

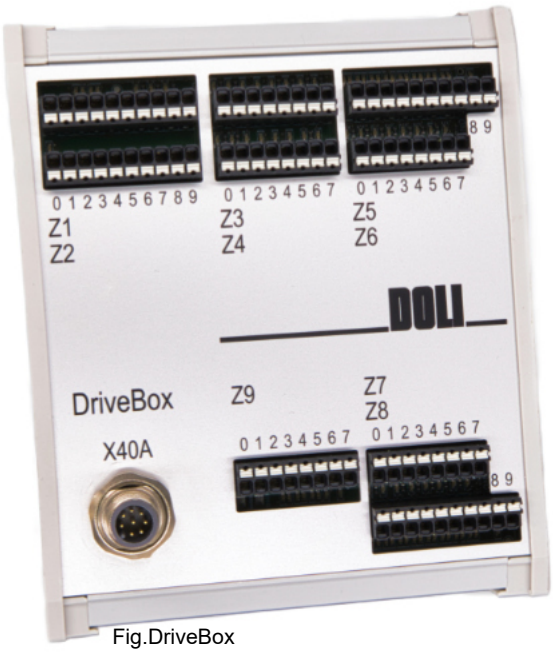
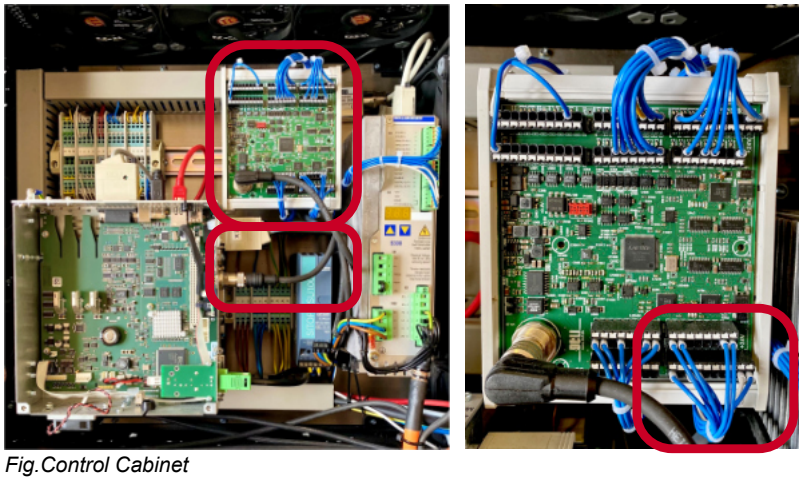


Fig.DriveBox



Fig.Control Cabinet

Part Number	Product	Part Description	
1000649	Drive Box	drive box with ±10V command output, 24 voltI/Os (16 outputs, 16 inputs), connecting terminal .	
7007368	EDCi-K1W	connection cable drive box, 1m, M12-M12, angled	

Expansion modules

iDCA

The iDCA is an expansion module with a DC power supply, which captures analog signals and is specially designed for strain gauges. Internal signal conditioning takes place via a 24-bit analog-to-digital converter.
The input range can be changed by adjusting the gain and covers ±5 mV to ±10 V. The supply voltage for the connected sensor is 10 VDC.
The intelligent sensor plug SGS enables automatic sensor detection for analog transducers with output signals from 1, 2, 4 or 8 to 640 mV/V and for sensor signals ranging from 1 to 10 V.
The module achieves a signal-to-noise ratio of 91 dB at a filter time of 1 ms and has a temperature drift of 10 ppm/K.

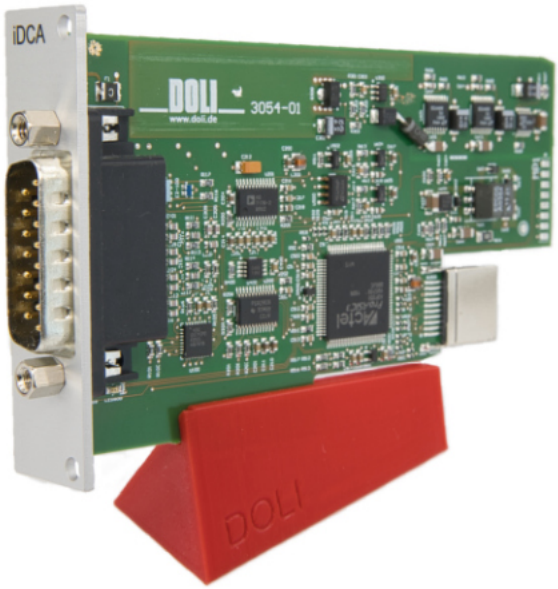


Part Number	Product	Part Description
10004648	iDCA	analog measuring amplifier for strain gauge 10 VDC-excitation, 24 bit

Expansion modules

iCFA

The iCFA is an expansion module with a DC power supply, which captures analog signals and is specially designed for strain gauges. Internal signal conditioning takes place via a 24-bit analog-to-digital converter.
The input range can be adapted by adjusting the gain and covers ±5 mV to ±10 V.

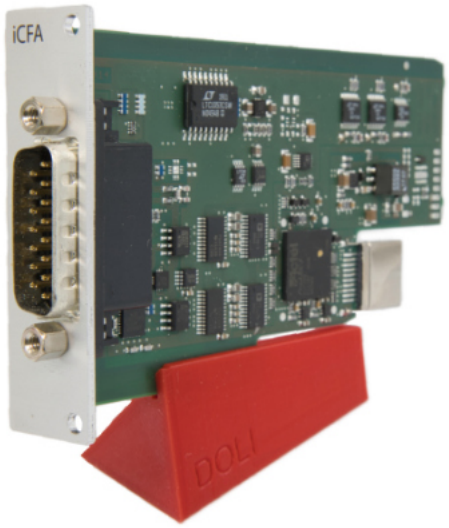

The sensor can be powered with 0.9 or 7 VAC (effective, 5 kHz) or by 1.25 or 10 VDC, depending on the type of sensor.

The intelligent sensor plug SGS enables automatic sensor detection for:

- LVDT and inductive transducers with output signals from 4 to 640 mV/V
- Analog strain gauge transducers with 1, 2, 4, 8 to 640 mV/V
- Analog signals in the range of 1 to 10 V

The module achieves a signal-to-noise ratio of 96 dB at a filter time of 1 ms and has a temperature drift of 4 ppm/K.


Part Number	Product	Part Description
1000489	iCFA	analog measuring amplifier for strain gauge or LVDT, DC-AC excitation, 24 bit ADC

Expansion modules

iIO

The iIO is an expansion module that captures and outputs digital signals. It has eight digital inputs and eight digital outputs with +24 V.

The inputs are supplied with +24 V.

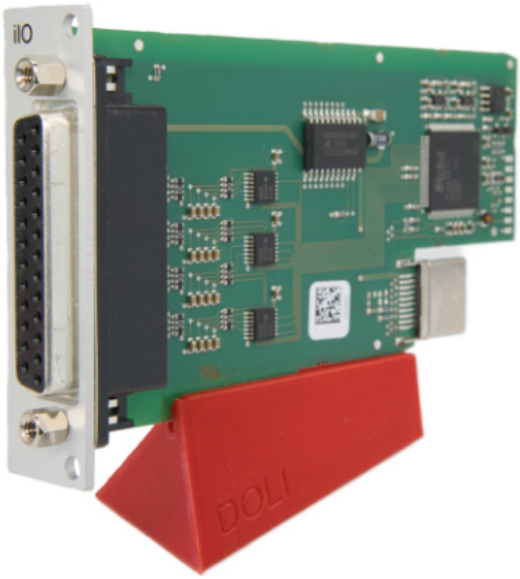

Part Number	Product	Part Description
1000498	iIO	24 volt-I/Os (8 outputs, 8 inputs)

Expansion modules

iINC


The iINC is an expansion module that captures incremental displacement or rotary encoder signals. It has two inputs for incremental encoders plus four digital inputs and outputs.

The intelligent sensor plug SGS enables automatic sensor detection for:

- Incremental encoders with signal types: TTL, line, sinusoidal 1 V, sinusoidal 11 µA
- Absolute encoder with SSI interface

In addition, four digital inputs and four digital outputs with +24 V are available.

The inputs are supplied with +24 V.

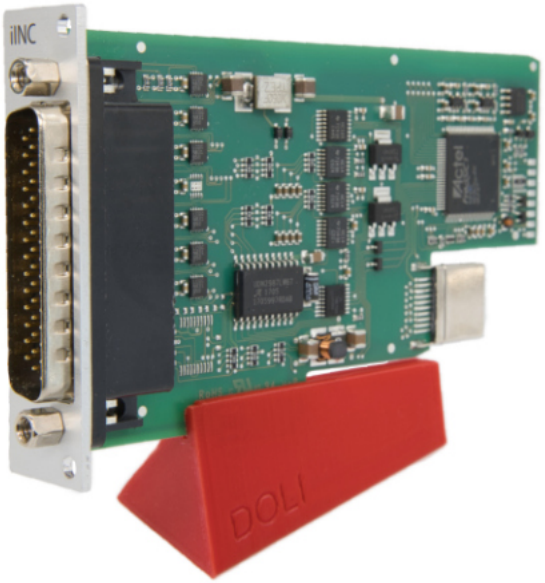

Part Number	Part	Part description	
1000494	iINC	two incremental counters, SSI inputs, 24V-I/Os (4 outputs, 4 inputs)	
1000714	iNCX	two incremental counters with RS485 interface for MFX extensometer	
1000738	iINCX-K3	connection cable, 3m, iINCX iSI-Module to MFX extensometer	
1000723	iINCX-K5	connection cable, 5m, iINCX iSI-Module to MFX extensometer	


Expansion modules

iADA

The iADA is an expansion module that captures and outputs analog voltages.

It provides four analog inputs with a measuring range of ±10 V and a resolution of 24 bits, plus four analog outputs with ±10 V and 16-bit resolution.

The voltage supply for the inputs is +5 V (analog potentiometer) and +24 V.

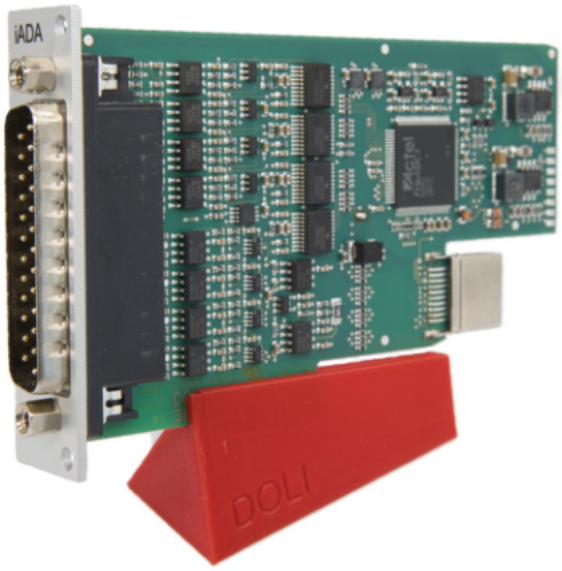


Part Number	Product	Part Description
1000487	iADA	4 x 24 bit AD-converter and 4 x 16 bit DA-converter

NEW

Expansion modules

iCOM

The iCOM is an iSI-Extenstion Card compatible with EDCi Products. With the iCOM, you can exchange Sensor Data and Status Information in real-time between two EDCis. The iCOM works with System Rates from 1 kHz to 10 kHz, meaning that Data is exchanged within one System Clock Cycle.

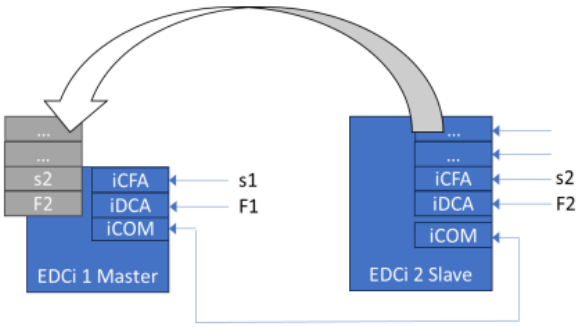

This example shows the real-time transfer of four Sensor Values from EDCi 2 to EDCi 1, as shown in Picture 1. Here the use-case is to extend the measurement capability of EDCi 1.

The additional values could be any analog or digital measurement Sensor of EDCi 2: an Extensometer, Auxilliary Measurements with Strain Gauges, Incremental Sensors etc. Even though the EDCis are named “Master” and “Slave”, it is not necessary to have a Sync Option installed to transfer Data between the EDCis with the iCOM.

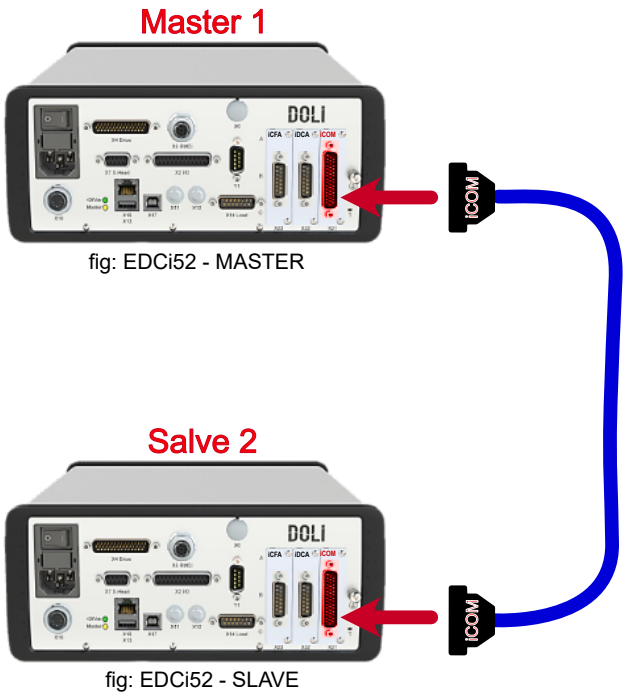


fig: EDCi52 - MASTER

fig: EDCi52 - SLAVE

iCOM Set

Bi-Directional Real Time Communication



EDCi Firmware 9149.030 or later is required for the EDCi to detect the iCOM Prototype.

Part Number	Product	Part Description
1000799	iCOM -Set	Bi-Directional Real Time Communication Interface between EDCis Set Includes 2x iCOM and 0.7 m communication cable with transceivers.

Expansion modules

iADA-Box

The iADA Box is an expansion module that allows the external use of the analog inputs and outputs of the iADA module. It enables easy access to analog signals outside the EDCi and provides interfaces for forwarding signals to external measuring instruments.

The following are available:

- Four analog inputs (±10 V) via BNC connectors
- Four analog outputs (±10 V) via BNC connectors
- +24 V on two banana connectors



Part Number	Product	Part Description	
1000487	iADA	4 x 24 bit AD-converter and 4 x 16 bit DA-converter	
1000740	iADA-B	distribution box for iADA with BNC connectors for analog inputs and outputs	
7005411	iADA-C	Connection cable iADA <-> iADA distribution box, 2m, incl. distribution plug iADA-D	
1000735	iADA-D	25pin distribution plug for iADA	

Products

RMCi

Our RMCi control units enable the user-friendly remote control of EDCi devices and the various models offer a range of different control and display options.

From the compact RMCi6 to the RMCi8 with touchscreen and integrated emergency stop feature, they enable you to start, stop and control test sequences directly and intuitively.

SGS plugs enable different sensors to be connected safely, reliably and securely. When combined, these accessories ensure precise, efficient and user-friendly operation of your testing machines.





ACCESSORIES

RMCi1

Product description
The RMCi1 is a compact control and display panel for controlling the EDCix2 (tabletop devices). It has 16 freely assignable buttons, a digital potentiometer (DigiPot), an integrated emergency stop button and a TFT colour touchscreen .
Status LEDs indicating the operating states are also incorporated.

PRODUCT DESCRIPTION


- DISPLAY PANEL WITH INTEGRATED KEYBOARD
- 480 X 272 PX COLOR TFT TOUCH DISPLAY
- COMPATIBLE WITH DESKTOP DEVICES (EDCI X2)
- SUPPORTS BOTH PC-CONTROLLED AND STANDALONE TEST MODES
- INTEGRATED EMERGENCY STOP BUTTON



Device Specification	
Number of Keys	16
RoHS Compliance	EN50581
Including 3m Connection Cable	✓
Product-Nr.:	7007503

Housing	
Dimensions [mm]	245 x 97 x 38
Weight [g]	740
Mounting	Mechanic
Material	Aluminium

Part number and part description

Order Number	Part	Part Description	
1000503	RMC1	EDCi front panel with keyboard unit and TFT touch display	
1000651	RMCi1G	EDCi front panel with keyboard unit and TFT touch display built-in a housing, with M12, no	
1000751	RMCi1-M12	EDCi front panel with keyboard unit and TFT touch display, with M12 plug, without built-in a housing,	

ACCESSORIES

RMCi6

Product description

The RMCi6 is a compact hand-held device for controlling the EDCi units. It has 15 freely assignable buttons, a digital potentiometer (DigiPot), and a monochrome OLED display (128 × 64 pixels). Status LEDs indicating the operating states are also incorporated.

Communication takes place via an RS485 interface using the internal EDCi protocol. The power supply is +24 VDC.

The back of the device features a magnetic film that enables it to be flexibly attached directly to the testing machine.

On delivery, the device comes with a shielded connection cable (M12–M12, 3 m long) for connecting the RMCi.



Part Number	Part	Part Description
1000650	RMCi6	Remote mashine control panel with 15 keys and DigiPoti, M12-connector, cable 3m
Option		
7007312	RMCi-K1	Connection cable, 1m, M12-M12, for RMCi and drive box
7009460	RMCi-K2	Connection cable, 2m, M12-M12, for RMCi and drive box
7008783	RMCi-K3	Connection cable, 3m, M12-M12, for RMCi and drive box
7007313	RMCi-K5	Connection cable, 5m, M12-M12, for RMCi and drive box
7007314	RMCi-K10	Connection cable, 10m, M12-M12, for RMCi and drive box
7009643	RMCi-K20	Connection cable, 15m, M12-M12, for RMCi and drive box

ACCESSORIES

RMCi7

Product description

The RMCi7 is a compact hand-held device for controlling the EDCi units. It has 19 freely assignable buttons, a digital potentiometer (DigiPot), an integrated emergency stop button and a monochrome OLED display (128 × 64 pixels). Status LEDs indicating the operating states are also incorporated.

Communication takes place via an RS485 interface using the internal EDCi protocol. The power supply is +24 VDC.

The back of the device features a magnetic film that enables it to be flexibly attached directly to the testing machine.

On delivery, the device comes with a shielded connection cable (M12–M12, 3 m long) for connecting the RMCi.



Part Number	Part	Part Description
1000505	RMCi7	Remote mashine control panel with 19 keys, emergency-stop, DigiPoti and display, M12-connector, cable 3m
Option		
7007312	RMCi-K1	Connection cable, 1m, M12-M12, for RMCi and drive box
7009460	RMCi-K2	Connection cable, 2m, M12-M12, for RMCi and drive box
7008783	RMCi-K3	Connection cable, 3m, M12-M12, for RMCi and drive box
7007313	RMCi-K5	Connection cable, 5m, M12-M12, for RMCi and drive box
7007314	RMCi-K10	Connection cable, 10m, M12-M12, for RMCi and drive box
7009643	RMCi-K20	Connection cable, 15m, M12-M12, for RMCi and drive box

ACCESSORIES

RMCi8

Product description

The RMCi8 is a compact control and display panel for controlling the EDCi devices. It has 16 freely assignable buttons, a digital potentiometer (DigiPot), an integrated emergency stop button and a TFT colour touchscreen (480 × 272 pixels). Status LEDs indicating the operating states are also incorporated.

Communication takes place via an RS485 interface using the internal EDCi protocol. The power supply is +24 VDC.

The back of the device features a magnetic film that enables it to be flexibly attached directly to the testing machine.

On delivery, the device comes with a shielded connection cable (M12–M12, 3 m long) for connecting the RMCi.



Part Number	Part	Part Description
1000733	RMCi8	Remote mashine control panel with 16 keys, emergency-stop, DigiPoti and 4,3 " tft touch M12- connector, cable 3m
Option		
7007312	RMCi-K1	Connection cable, 1m, M12-M12, for RMCi and drive box
7009460	RMCi-K2	Connection cable, 2m, M12-M12, for RMCi and drive box
7008783	RMCi-K3	Connection cable, 3m, M12-M12, for RMCi and drive box
7007313	RMCi-K5	Connection cable, 5m, M12-M12, for RMCi and drive box
7007314	RMCi-K10	Connection cable, 10m, M12-M12, for RMCi and drive box
7009643	RMCi-K20	Connection cable, 15m, M12-M12, for RMCi and drive box

ACCESSORIES

RMCi extension cables

The EDCi supports up to two RMCi devices.
If more than one RMCi is used, an RMC-hub is required.

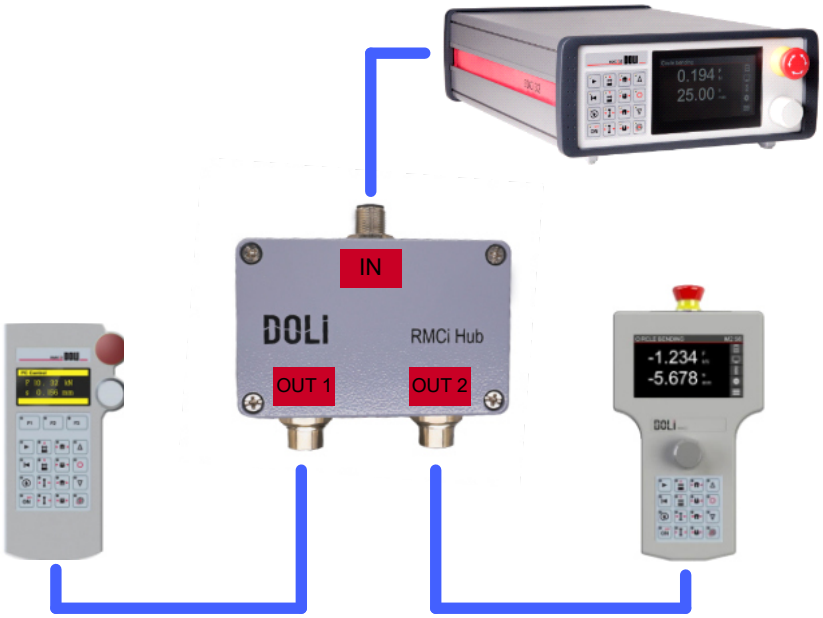


Fig.: RMCi connection hub


Part Number	Part	Part Description
1000718	RMCiH	RMCi connection hub for two RMCi's incl. cabel 1m (RMCi1, RMCi6, RMCi7,RMCi8)
Option		
7007312	RMCi-K1	Connection cable, 1m, M12-M12, for RMCi and drive box
7009460	RMCi-K2	Connection cable, 2m, M12-M12, for RMCi and drive box
7008783	RMCi-K3	Connection cable, 3m, M12-M12, for RMCi and drive box
7007313	RMCi-K5	Connection cable, 5m, M12-M12, for RMCi and drive box
7007314	RMCi-K10	Connection cable, 10m, M12-M12, for RMCi and drive box
7009643	RMCi-K20	Connection cable, 15m, M12-M12, for RMCi and drive box

Products

SGS PLUGS

Intelligent sensor plugs SGS enable the EDC to automatically detect the connected sensor. A built-in reference voltage generator and EEPROM store all the relevant sensor data, as well as calibration and linearisation values. This means that once a sensor has been calibrated, it can be used without any problems on different EDC systems, and does not need to be calibrated or linearised again. The connector is fine-tuned to the sensor's sensitivity and therefore guarantees precise and reliable signal conditioning.



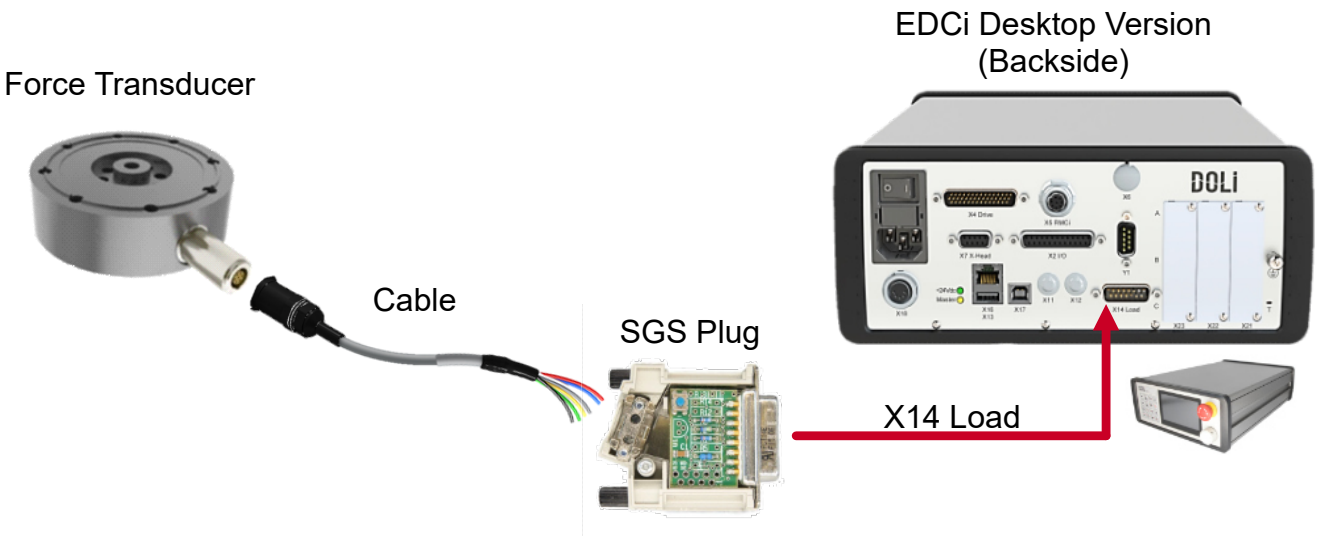

Products

Expansion modules

Our iSI expansion modules enable an extremely varied range of sensors and actuators – analog or digital signals, bridge circuits, encoders or SSIs – to be connected. They are available as standard for the EDCi family from version EDCi 2x and enable fast and extremely flexible configuration of measurement and control functions for testing machines. Their modular design ensures that your tester remains precisely tailored to your requirements and offers maximum flexibility for static and dynamic test procedures.

iDCA Analog strain gauge measuring amplifier, with DC power supply

iCFA Analog measuring amplifier for LVDT and strain gauges, with AC/DC power supply

iIO Eight digital I/Os

iINC Two incremental inputs and four digital I/Os
iINCX-K3 connection cable, 3m, iINCX iSI-Module to MFX extensometer
iINCX-K5 connection cable, 5m, iINCX iSI-Module to MFX extensometer

iADA Four analog I/Os

iADA-Box Access iADA functions outside the EDCi, so that signals can be forwarded to external measurement systems
iADA-Bi ADA connection terminal
iADA-C Cable iADA <-> iADA connection terminal, 2m, incl. distribution plug iADA-D
IADA-D Distribution plug for iADA 25-pin

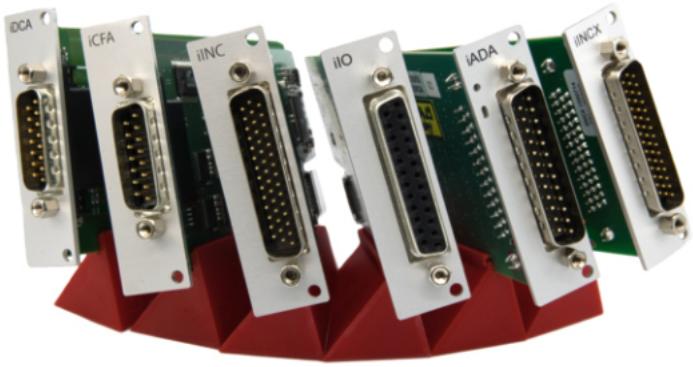


Fig. iSI expansion modules


SGS PLUGS

Sensor Plug for Analog transducers for all interfaces

The SGS sensor connector is required for connecting a sensor to a DOLI EDCi control unit. It is specifically matched to the signal type and sensitivity of the sensor, ensuring reliable transmission of calibration data and proper sensor recognition.

Please check your sensor's technical specifications and select the appropriate connector from the DOLI SGS series.

If you need support, our customer service team will be happy to help you find the right solution for your application.

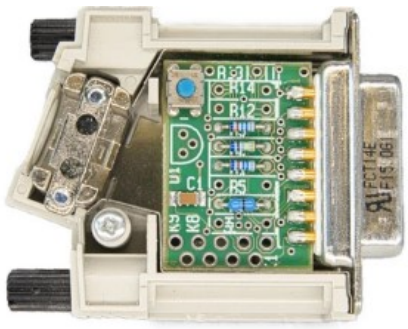

Sensor connector (SGS)
for analog transducers (X14, iDCA, iCFA)
15-pin Sub-D connector

Part Number	Part	Description
1000068	SGS_1mV	SGS sensor plug 15-pin for analog transducers 1mV/V
1000067	SGS_2mV	SGS sensor plug 15-pin for analog transducers 2mV/V
1000069	SGS_4mV	SGS sensor plug 15-pin for analog transducers 4mV/V
1000071	SGS_16mV	SGS sensor plug 15-pin for analog transducers 16mV/V
1000073	SGS_80mV	SGS sensor plug 15-pin for analog transducers 80mV/V
1000075	SGS_320mV	SGS sensor plug 15-pin for analog transducers 320mV/V
1000076	SGS_640mV	SGS sensor plug 15-pin for analog transducers 640mV/V

SGS PLUGS

Sensor Plug for DC-signals

The SGS sensor connector is required for connecting a sensor to a DOLI EDCi control unit. It is specifically matched to the signal type and sensitivity of the sensor, ensuring reliable transmission of calibration data and proper sensor recognition.
Please check your sensor's technical specifications and select the appropriate connector from the DOLI SGS series. If you need support, our customer service team will be happy to help you find the right solution for your application.

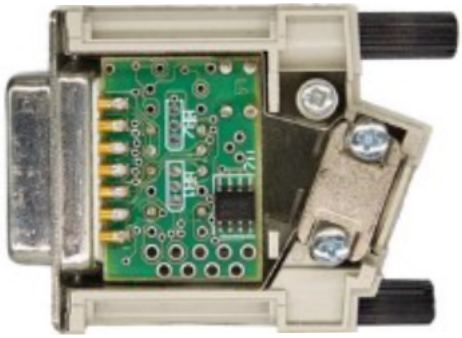


Fig.: Sensor connector (SGS)
for analog transducers (X14, iDCA, iCFA)
15-pin Sub-D connector

Part Number	Part	Description
1000797	SGS_20mA	SGS sensor plug 15-pin for analog transducers 0-20mA (DC)
1000085	SGS_6mVDC	SGS sensor plug 15-pin for analog transducers 6mA (DC)
1000797	SGS_10V	SGS sensor plug 15-pin for analog transducers ±10 VDC

SGS Plugs

Sensor Plug for INCREMENTAL transducers for EDCi (x7)

The SGS sensor connector is required for connecting a sensor to a DOLI EDCi control unit. It is specifically matched to the signal type and sensitivity of the sensor, ensuring reliable transmission of calibration data and proper sensor recognition.
Please check your sensor’s technical specifications and select the appropriate connector from the DOLI SGS series. If you need support, our customer service team will be happy to help you find the right solution for your application.



Fig.: "Exterior view" - Sensor connector (SGS)
for incremental transducers of the EDCi (X7)
9-pin Sub-D connector

Part Number	Part	Part Description
1000133	SGS_9IL	SGS sensor plug 9-pin for incremental transducers with line output signal
1000143	SGS_9IT	SGS sensor plug 9-pin for incremental transducers with TTL-output signal
1000137	SGS_9IS	SGS sensor plug 9-pin for incremental transducers with 11µA sine
1000141	SGS_9ISU	SGS sensor plug 9-pin for incremental transducers with 1V sine
10000144	SGS_9SSIL	SGS sensor plug 9-pin for SSI

SGS PLUGS

Sensor Plug for INCREMENTAL transducers for iINC + iINCX

The SGS sensor connector is required for connecting a sensor to a DOLI EDCi control unit. It is specifically matched to the signal type and sensitivity of the sensor, ensuring reliable transmission of calibration data and proper sensor recognition.
Please check your sensor's technical specifications and select the appropriate connector from the DOLI SGS series. If you need support, our customer service team will be happy to help you find the right solution for your application.

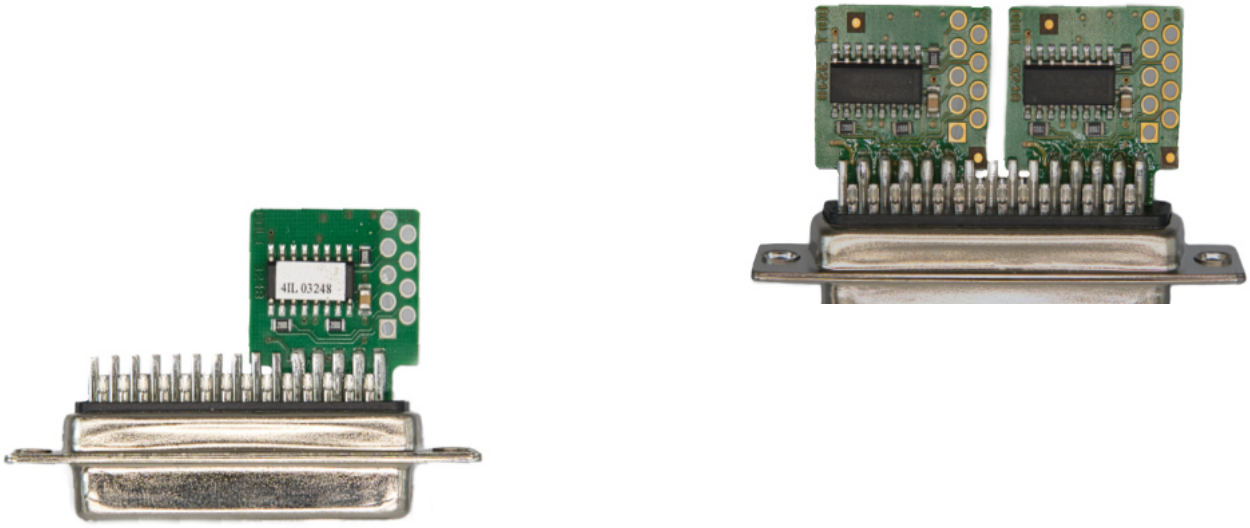


Fig.: "Internal view of a connector with circuit board and electronics" - Sensor connector (SGS) for incremental encoders (iINC, iINCX)
44-pin Sub-D connector

Part Number	Part	Part Decription
1000479	SGS_4IL1	SGS sensor plug 44-pin for one transducer with linedriver output signal
1000480	SGS_4IL2	SGS sensor plug 44-pin for two transducer with linedriver output signal
1000656	SGS_4IT1	SGS sensor plug 44-pin for one transducer with TTL output signal
1000657	SGS_4IT2	SGS sensor plug 44-pin for two transducer with TTL output signal
1000658	SGS_4IS1	SGS sensor plug 44-pin for one transducer with 11µA sine
1000659	SGS_4IS2	SGS sensor plug 44-pin for two transducer with 11µA sine
1000660	SGS_4ISU1	SGS sensor plug 44-pin for one transducer with 1V sine
1000661	SGS_4ISU2	SGS sensor plug 44-pin for two transducer with 1V sine
1000662	SGS_4SSI1	SGS sensor plug 44-pin for one transducer with SSI
1000663	SGS_4SSI2	SGS sensor plug 44-pin for two transducer with SSI
7007337	iINC-AK	cable adaptor for iINC on 2 x 9-pole (A, C) and 1 x 25-pole (B, IOs)

SGS Plugs

Sensor Plug for piezo electric transducer fo IEPE

The SGS sensor connector is required for connecting a sensor to a DOLI EDCi control unit. It is specifically matched to the signal type and sensitivity of the sensor, ensuring reliable transmission of calibration data and proper sensor recognition.

Please check your sensor’s technical specifications and select the appropriate connector from the DOLI SGS series.

If you need support, our customer service team will be happy to help you find the right solution for your application.



Fig.: Sensor connector (SGS)
for constant current powered
piezoelectric sensors IEPE
15-pin Sub-D connector

Part Number	Part	Part Description
1000741	SGS IEPE	SGS sensor plug 15-pin for transducer with IEPE

MOTORS & VALVES

DC-Servomotors

DC-servomotor shipment motor

- with encoder, 1000 channel lines/revolution,
- line driver, motor cable (3m) with plug S_VAM (7003922),
- cable (3m) for encoder with SGS_9IL sensor plug (1000133),

assembled and completely tested.

DC-Servomotor suitable for DC160 (48V, 3,3A, 160W) power amplifier



Fig.: DC -Servo Motor

Part Number	Part	Part Description
1000008	DC-Servomotor	DC-servomotor, 0.3Nm at 3.3A, 3800rpm at 48V
1000009	DC-Servomotor	DC-servomotor with helical gearbox, 2.2Nm at 3.3A, 413rpm at 48V
1000010	DC-Servomotor	DC-servomotor with low backlash planetary gearbox, 3.38Nm at 3.3A, 316rpm at 48V

DC-Servomotor
-Suitable for DC320 (80V, 8A, 320W) power amplifier



Fig.: DC -Servo Motor

Part Number	Part	Part Description
1000765	DC-Servomotor	DC-servomotor, 0.93Nm at 6,2A, 3000rpm at 60V, 5m cabel
Other versions with gearbox available on request		

Valve & Manifolds

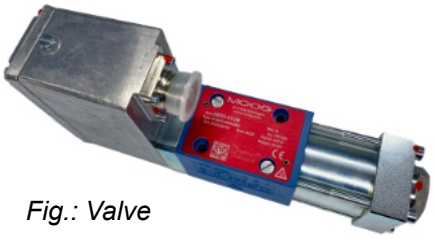


Fig.: Valve

Part Number	Part	Part Description
7006973	V_R08	4/4-way Moog proportional valve D633, axis cut, Pmax=350 bar, Q=20l/min
7006974	V_R16	4/4-way Moog proportional valve D633, axis cut, Pmax=350 bar, Q=40l/min



Fig.: Cable



Fig.: Plug

Part Number	Part	Part Description
7005328	D633K05	cable (5m) EDCi with X18 <-> D633 valve (incl. plug 7003921, 7003923)
7005430	D633K10	cable (10m) EDCi with X18 <-> D633 (incl. plug 7003921, 7003923)
7003921	D633S	plug for Moog D633 valve



Fig. Manifold

Part Number	Part	Part Description
7006972	MAN01	manifold for Moog D633 valve, pressure sequence valve included
7007362	MAN02	manifold for double-action piston and Moog D633 valve



Fig. Pressure sequence valve

Part Number	Part	Part Description
7003921	D633S	plug for Moog D633 valve
7006976	D633FI	flushing plate for Moog D633
7006969	V_DF	pressure sequence valve Qmax=60l/min

TRANSDUCER WITH ACCESSORIES


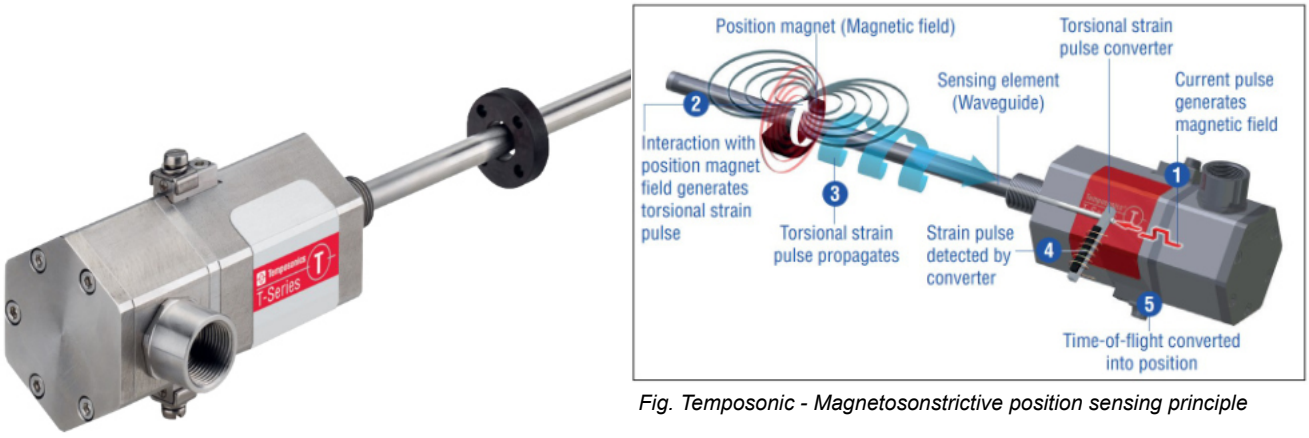


Fig. Temposonic - Magnetosonstrictive position sensing principle

Part Number	Part	Part Description
7006944	OPT	Oil pressure transducer 500 bar without cable
1000209	DWT	Draw wire position transducer, resolution=0.82µm, meas.range=2m, cable 5m incl. 9-pin SGS (X7)
7005869	E_DWTR	Spare wire (5m) for DWT (1000209)
7006939	SSI-T350	Temposonics 350mm with ring magnet
7005420	SSI-K	Cable for Temposonics, 5m, incl. SGS_9SSIL
7006029	SSI-M	Mounting kit SSI-transducer DOLI

Mounting angle for EDC EDCi Series



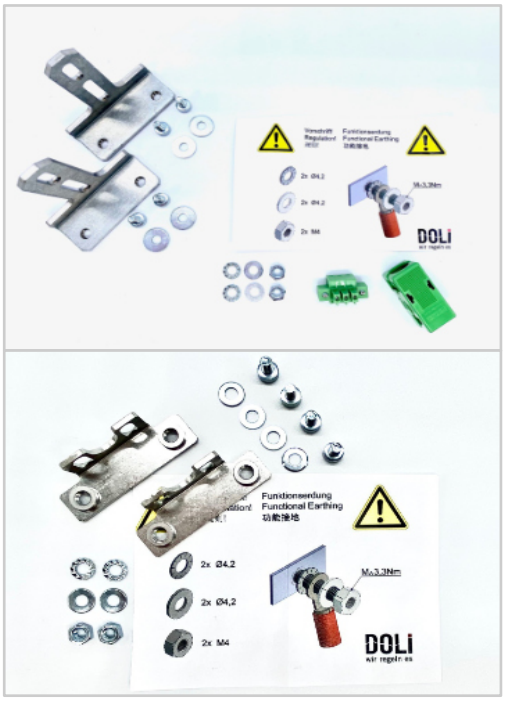

Part Number	Part	Part Description
7006104		2 pc. mounting angle for EDCi desktop
7005909		2 pc.mounting angle for EDCi built-in units
7009706		2 pc.mounting angle for EDCi10 built-in units

Transport box EDCi Series







Part Number	Part	Part Description
6000240	VP3	special transport box for each built-in unit EDCi15/i20/i50
6000242	VP4	special transport box for each desktop unit EDCi22/i52/i72
6000301	VP7	special transport box for each built-in unit EDCi70

Cabinets and mounting



Our control cabinets are custom-built to perfectly match each customer's specific requirements.
We place the highest priority on premium quality, precision engineering, and full compliance with all applicable electrical standards and regulations.

Part Number	Part	Part Description
CABINETS AND MOUNTING - PRICE ON REQUEST		

Products

Software

The EDC controller can be used flexibly – either as an autonomous standalone solution or as a machine control interface in combination with a PC.

Standalone mode:

The EDC controller can be used flexibly – either as an autonomous standalone solution or as a machine control interface in combination with a PC.

Note: Standalone mode is not available for the **EDCi10** model.

In this mode, the software is integrated directly in the EDC. **Soft, Hard** and **Concrete** tests are included free of charge.

New features such as **Cycle test, "External setpoint" test** and **Creep test** can be enabled using additional software licences.

PC mode:

Design engineers can use their own PC programs or higher-level control systems for communication with the EDC, using the DoPE interface (API), for example.

DOLI Elektronik GmbH makes a large number of software solutions available to download from the DOLI Customer Portal.

DOLI Customer Portal |DOLI Support Portal | Download: Firmware and Software

EDCi Software and Firmware

- DOLI Installation Center
- Firmware EDCi
- DoPE V10.26
- EDC Communication Driver
- Stand Alone Creep Test
- Guard Option

EDC220/580 and EDC220V/580V

- DOLI Installation Center
- Firmware EDC220/580
- Firmware EDC220/580V
- DoPE V2.91
- EDC Communication Driver
- Stand Alone Creep Test
- Guard Option

DoPE interface - The API for DOLI EDCi controllers

The DoPE (DOLI Programming Environment) interface is the application programming interface (API) for EDC controllers from DOLI. It enables the software to control and scan all the functions of the EDCi, and to incorporate them in the customer's own applications.

Range of features

DoPE gives you direct access to:

- Motion commands (e.g. starting, stopping, positioning)
- Sensor data (readings in real time)
- Controller parameters (configuration and optimisation)
- Digital I/Os (monitoring and controlling inputs/outputs)
- Areas of application

The interface is already successfully used in:

- Installation Center (Test Center Light)
- Test&Motion Plus
- Here, the most important DoPE commands are directly integrated as operator functions.
- In addition, design engineers can use their own PC programs or higher-level control systems for communication with the EDC.

Licences for Stand-Alone Software

Part Number	Part	Part Description
3000129	SAS-01	Licence for Creep Test for EDCi

Software options

Part Number	Part	Part Description
3000128	iGO	Guard Option (not possible to EDCi10)

DOLI Elektronik GmbH
Rudolf-Diesel-Str. 3
72525 Münsingen

+49 (0) 7381 767 320 0
info(at)doli.de
www.doli.de

Copyright 2026 DOLI Elektronik GmbH. The information contained herein may be changed at any time without prior notice.

The information contained herein is provided for informational purposes only. The only terms and conditions governing the sale of DOLI products, as well as services, support, and solution offerings, are those set forth in a written sales agreement. The only warranties for DOLI products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein shall be construed as constituting any additional warranty or creating any additional binding terms or conditions. DOLI shall not be liable for any technical or editorial errors or omissions contained herein. The information contained herein is subject to change without prior notice.

PK-Catalog 2026-Rev0-20261105

PK-Catalog 2026-Rev0-20261105
© Copyright 2026 DOLI Elektronik GmbH