







本公司智慧財產，未經同意不得複製  
DAILYWELL copyright, may not be used  
without permission from DAILYWELL

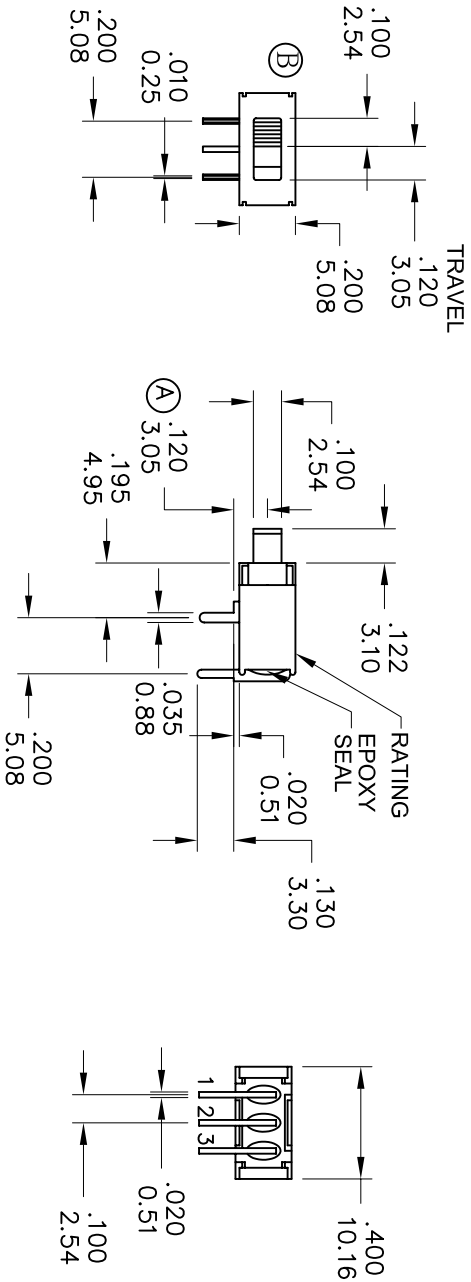

Model No.	POS.1	POS.2	POS.3
			
5FS1	ON	NONE	ON
Term. Comm.	2-1	2-3	
SCHEMATIC			

SWITCH FUNCTION

P.C. MOUNTING



SPECIFICATIONS

**MECHANICAL LIFE:** 30,000 make-and-break cycles.  
**CONTACT RESISTANCE:** 20mΩ max. initial @ 2-4VDC  
100mA for both silver and gold plated contacts.  
**INSULATION RESISTANCE:** 1,000MΩ min.  
**DIELECTRIC STRENGTH:** 1,000 V RMS@sea level.  
**OPERATING TEMPERATURE:** -30°C to 85°C.

MATERIALS

**CASE:** Dially phthalate (DAP) (UL94v-0).  
**ACTUATOR:** Nylon,black std.  
**HOUSING:** Brass,tin plated.  
**CONTACT:** Silver or gold plated.  
**TERMINALS:** Gold or silver plated copper alloy.  
**RoHS:** 2002/95/EC

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)  
Q : 1Amp with resistant load@250VAC  
3Amps with resistant load @120 VAC or 28 VDC

德利威電子股份有限公司  
DAILYWELL ELECTRONICS CO.,LTD.

符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2				TITLE 圖名		Sub-Miniature Slide Switches				SIZE 圖紙	A4				
1	Ⓐ	新增尺寸	FEB-27-2008	TOLERANCE (公差) : 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 5° FILE NAME : 5FSP0028				DWG NO. 圖號		5FS1S102M6QES				UNIT	inch				
2	Ⓑ	滑塊朝右	NOV-13-2009					REV. 版本						C	DATE 日期	JUN - 16 - 2005	SHEET 張數	1 of 1	
3	Ⓒ							CHECKED BY 審核						RICHARD		DRAWN BY 製圖		ERIN	
4	Ⓓ																		
5	Ⓔ																		