

PROJECT PLAN FOR THE DESIGN AND IMPLEMENTATION OF AN ADAPTIVE HEARING AID

Kayla-Jade Butkow (714227) & Kelvin da Silva (835842)

School of Electrical & Information Engineering, University of the Witwatersrand, Private Bag 3, 2050, Johannesburg, South Africa

Abstract:

Key words:

1. INTRODUCTION

clarify what the hearing aid is

2. PROJECT SPECIFICATIONS

2.1 Problem Analysis

2.2 Requirements and Specifications

2.3 Assumptions

assuming we can use the kudu wave

2.4 Success Criteria

2.5 Constraints

3. PROJECT BACKGROUND

3.1 Literature Review

The aim of the filter bank is to divide the audible frequency range into a number of bands, so that different amplifications can be applied to different ranges.

In order to implement directionality, two different types of microphones can be used: omni-directional and directional [1, 2]. To achieve directionality with omni-directional microphones, two must be used, with one placed at the back of the hearing aid and one at the front [1, 2]. If a directional microphone is used, one microphone is required [2]. Most hearing aids allow the user to switch between a directional and an omni-directional mode [2]. If a directional microphone is used, an omni-directional microphone is also required for when the user selects omni-directional mode [2].

There have been numerous implementations of the directionality of a hearing aid. An adaptive directionality system was implemented by [1] and [3]. With an adaptive system, the hearing aids focus automatically in the direction of the sound with the greatest signal to noise ratio [1]. Using two omni-directional microphones, adaptive directionality is implemented by cross-correlating the signals from the front and back microphones and using the cross-correlated signals to

determine an adaptive weight for altering the position of the nulls (the angles of greatest attenuation) [1]. However, research has not been done into changing the directionality of the device to a direction selected by the user.

In order to achieve directionality, different delays between the microphones are used. By changing the delays, different attenuation patterns can be acquired [2]. The three most commonly used patterns are cardioid, hyper-cardioid and bi-directional [2].

4. SYSTEM DESIGN

A block diagram of the full system is given in *Figure 1*.

The microprocessor block consists of all of the signal processing required for the functioning of the hearing aid. The required signal processing is expanded upon in *Figure 2*.

4.1 Compensatory Amplification

4.2 Directionality

4.3 Hardware

Analog circuitry is required to acquire the sound signal, condition it and convert it to digital. To acquire the signal, two omni-directional microphones are used. The front microphone is the primary microphone which is used alone when the omni-directional mode is selected. The rear microphone is used along with the front microphone when directional mode is selected. The signals from the microphones are amplified and then passed through an eighth order switched capacitor anti-aliasing filter. The filter has a cutoff frequency of 25 kHz, which was selected to ensure that the entire audible range is left unattenuated, while still attenuating the unwanted signal components. Once the signals have been filtered, they are converted to digital by the analog to digital converter (ADC) of an Arduino Due microcontroller. Thereafter, the signals undergo signal processing, as discussed above, before being converted back to analog signals by the Arduino's digital to analog converters. The analog signal corresponding to each ear is then relayed to the ap-




Figure 1: Full system block diagram

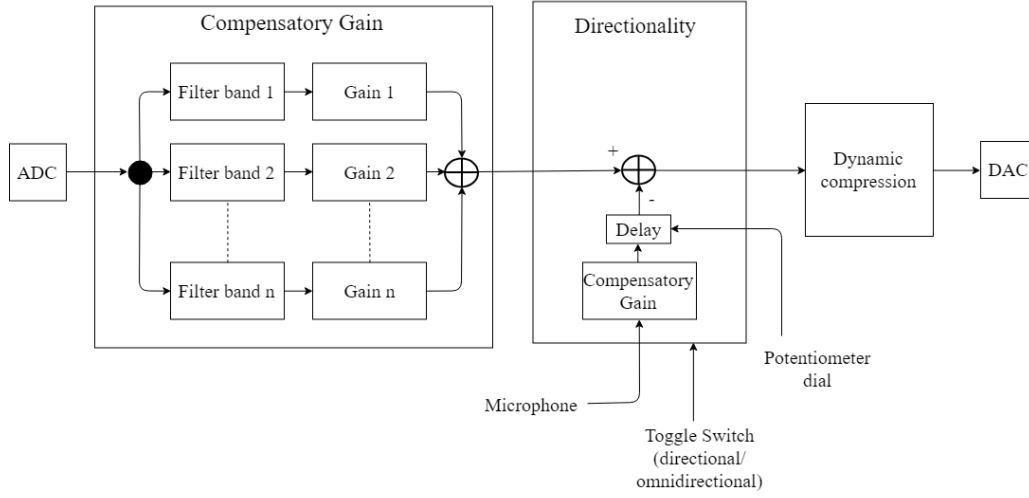


Figure 2: Block diagram of the

appropriate ear using earphones which interact with a headphone jack.

In order to tune the directionality of the hearing aid, a potentiometer, which acts as a dial, will be used. The signal from the potentiometer is also converted to digital by the ADC for signal processing. The hearing aid will include a power button to turn the device on or off, and a toggle switch to switch between directional and omni-directional amplification modes. The entire system will be powered using rechargeable batteries.

A circuit diagram of the hardware components of the system is given in *Figure 3*.

Figure 3: Circuit diagram for the system

4.4 Laboratory Full System Testing

In order to obtain objective results that are free from human bias, the system will be tested in a laboratory using a signal generator to generate pure tones. By generating pure tones of specific frequencies and feeding these tones to the hearing aid, the ability of the device to apply compensatory amplification, and to apply amplification to the correct frequencies, can be quantified. The frequency of the sinusoidal pure tone signals will be set to range from the lower to the upper bounds of the frequency range of human hearing. Additionally, high frequency noise will be added to the signals such that the performance of the device can be evaluated in the presence of noise.

In order to test the directionality of the device, one speaker will be placed in a fixed position. The hear-

ing aid will be placed in the centre of a rotating platform with the dial facing towards the speaker. A pure tone signal is played from the speaker and the resulting output signal from the hearing aid is saved. The platform is then rotated by 5° and the procedure is repeated. This is done for 360° . Once signals have been acquired corresponding to each 5° increment, a polar plot of the signals will be created. In the polar plot, the angle of the signals is taken as the angle of the hearing aid relative the dial (the 0° reference point). This will allow for an analysis of the degree of amplification and attenuation of signals in all directions with the directionality being fixed in one direction.

4.5 Clinical Full System Testing

In order to verify the performance of the hearing aid, clinical tests are required. This will allow for a quantification of the value that the hearing aid provides to the participant.

The method of the clinical testing will now be detailed. First, staff from the school of Electrical and Information Engineering will be asked to participate in the clinical testing. Prior to performing the tests, an audiogram will be collected from each participant using the KUDUwave headset. A hearing aid will then be customised for each participant. Thereafter, a second audiogram will be obtained with the participant wearing the hearing aid. Since the KUDUwave cannot be used on top of earphones, the microphone will be mounted on a model head (made out of polystyrene) and the KUDUwave headset will be placed on top of the fake head. The participant will then wear the earphones which receive the processed signals and a

second audiogram will be obtained. The two audiograms will then be compared in order to assess the effectiveness of the compensatory amplification in the device.

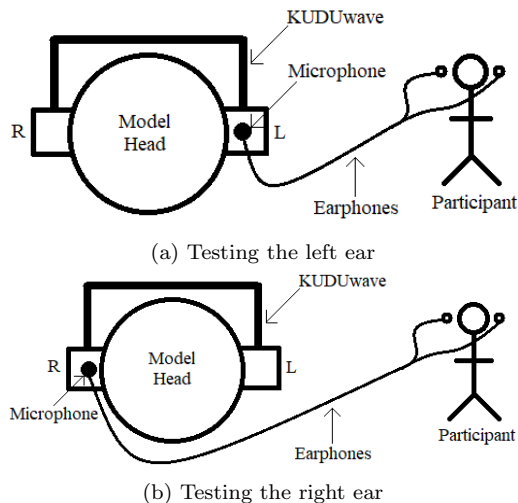


Figure 4: Schematic of the procedure for testing compensatory amplification

In order to test the directionality of the device, eight speakers will be set up in a circle, separated by 45° angles. The participant will be asked to sit in a chair which faces 0° while wearing the hearing aid. Pure tone sounds will be played from a single speaker at a time and the participant will be asked to tune the dial controlling the directionality until the sound is at its loudest. The angle of the dial will then be recorded and compared to the angle of the speaker, thus allowing for a quantification of the error present in the directionality.

5. PROJECT METHODOLOGIES AND MANAGEMENT

5.1 Project Phases

The project has been divided into 11 development phases, which encapsulate the entire project, from ethics clearance to the presentation. Three of these phases occurred prior to the submission of this document. The phases are detailed in the following sections.

Phase 1: Obtain Ethics Clearance

This phase involved obtaining ethics clearance for the project. This clearance is necessary for clinical testing of the hearing aid, using human input. The procedure for obtaining clearance involves setting out the testing procedure, creating consent forms and creating the questionnaire's for the participants to complete. This phase was completed between the 29th March and the 6th April. Ethics clearance was granted on the 11th May. Both partners were involved in the completion

of this phase.

Phase 2: Research

This phase involved performing the research for the project. This included research into compensatory gain, directionality, filtering and the conversion of digital signals to sound signals. This phase occurred from the 25th June to the 1st July. However, it must be noted that research will be an ongoing process throughout the entire duration of the project. Kayla-Jade performed research into gain and filtering and Kelvin investigated directionality and conversions. Thereafter, the research was shared and both partners familiarised themselves with both sets of research.

Phase 3: Hardware Design

In this phase, the circuit diagrams required in the project were designed. The overall system circuit diagram is given in Figure 3. This phase was completed between the 2nd July and the 6th July. The two partners performed this phase together.

Phase 4: Construction of Hardware

This phase involves the construction of the circuit that was designed in Phase 3. The circuit will be prototyped on a breadboard before being finalised on a PCB board. The phase will begin on the 9th of July and will end on the 16th. Kelvin will perform the construction of the hardware.

Phase 5: Implementation of Compensatory Amplification

In this phase, the compensatory amplification aspect of the hearing aid will be implemented. This phase has numerous sub-phases:

- Sub-phase 1: Interpolation of audiograms
- Sub-phase 2: Development of the filter bank
- Sub-phase 3: Designing the gains for each filter based on the audiogram
- Sub-phase 4: Attack and release times for changing the gain per frequency range
- Sub-phase 5: Dynamic compression of signals
- Sub-phase 6: Optimisation of code from the previous stages to allow for real-time signal processing

In sub-phase 1, the data from the audiogram will be hard-coded onto MATLAB, and will be linearly interpolated to increase resolution. In sub-phase 2, the filter bank for the auditory compensation will be designed and implemented. **** Come back here!!! ****

The first two sub-phases will be implemented concur-

rently with phase 4 by Kayla-Jade. Thereafter, sub-phases 3 and 4 will be implemented by Kayla-Jade, while Kelvin concurrently implements sub-phases 5 and 6.

Phase 6: Implementation of the Software Required for Directionality

In this phase, the software required to implement directionality will be implemented. This software will interface with the dial built into the hardware to tune the direction in which the sound must be amplified. The two partners will implement this phase together.
*** Date ***

Phase 7: Laboratory testing of the full system

Following the implementation of the entire system, full system testing is required.

Both partners will perform the laboratory testing.

Phase 8: Clinical testing of the full system

Phase 7 involves the testing of the audiogram in a clinical setting, using human participants. The procedure to be implemented in this phase is that described in *Section 4.5*

Both partners will perform the clinical testing.

Phase 9: Demonstration

This phase involves the preparation for open day. This includes creating a poster and a video explaining the project. It also includes preparing the demonstration for open day. Both partners will be involved in all aspects of the phase.

Phase 10: Documentation

This phase involves the writing of the final project report. The report will be worked on throughout the entire project, but in this phase, it will be the sole focus. The partners will each work on their reports individually.

Phase 11: Presentation Phase 11 is the final phase of the project which involves the preparation of the presentation. This will be done by the partners together.

6. CONCLUSION

REFERENCES

- [1] P. Corbishley et al. "An ultra-low power analogue directionality system for digital hearing aids." *2004 IEEE International Symposium on Circuits and Systems*, pp. 233–236, 2004.
- [2] T. Ricketts. "Directional Hearing Aids." *Trends in Amplification*, vol. 5, no. 4, pp. 139–176, 2001.
- [3] G. H. S. Uwe Rass. "Evaluation of digital hearing aid algorithms on wearable signal processor systems." *1996 8th European Signal Processing Conference (EUSIPCO 1996)*, 1996.