
## Retained stiffness-loss zones and strain-gauge locations

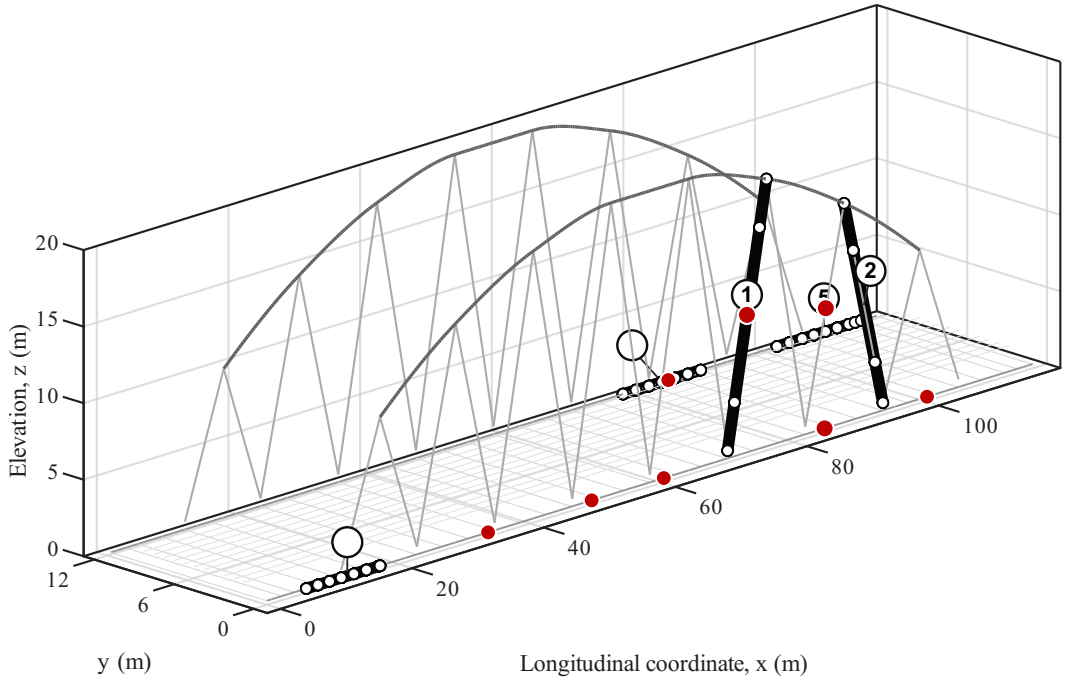


1 A11 diagonal
2 A14 diagonal
3 Main girder A, x=11.6 m
4 Main girder C, x=83.7 m
5 Main girder C, x=107.6 m
Measured strain-gauge locations

Arch curves are visual guides through diagonal-to-arch connection coordinates, not additional FE elements.