

PROJECT AREA: Mt. CUNSONPROJECT No. 401SPUDED: 27-7-74COMPLETED: 27-7-740654LOCATION: TANK IN POWERLINE AREA

CO-ORDS: X: Y:

ELEVATION: DIRECTION: INCLINATION: 90° TOTAL DEPTH: 73 mHOLE TYPE: ROTARY & HAMMER DRILLING CONTRACTOR: W. L. SIDES DRILLER: B. DownLOGGED BY: P. JONES DATE: BIT SIZE: 4 3/4" TO TOK. MAIDEN

CORE RECOVERY	METRAGE	DESCRIPTION	Core bedd'g angle and joint spacing	LOG SCALE: 1:200	SAMPLE No.	Assayed length	ASSAY VALUE			
							Cu	Pb	Zn	
NON-CORING	0	UNCONSOLIDATED SEDIMENTS 0-24.5		0						
		0-22: Sand ± minor clay & calcareous nodules			88864	6				
				6						
					865	6				
	10			12						
					866	6				
				18						
	20	22-24.5: White sandy clay		21	867	3				
					868	3				
		WHYALLA SANDSTONE 24.5-62.5		24						
		24.5-27: Tough silicified Ss ± silicified clay bands; Using hammer 24.5-27.		27	869	3				
	30	27-59: Generally soft lithic Ss ± numerous clay bands; Brown to buff colour; Grains approx. 70% Qtz, 30% volcs.		30	870	3				
				33	871	3				
				36	872	3				
	40			39	873	3				
				42	874	3				

0655

CORE RECOVERY	METRAGE	DESCRIPTION	LOG SCALE: 1:200	SAMPLE No.	Assayed length	ASSAY VALUE		
						Cu	Pb	Zn
NON - CORING		Samples damp below 42 m	45	888/5	3			
				876	3			
			48	877	3			
	50	Conglomerate band 50.5 - 50.7 (approx.) — pebbles white Qtz & red QTE	51	878	3			
		No clay 51 - 53 Then clayey Ss again.	54	879	3			
			57	880	3			
	60	59 - 62.5: Basal Breccia — QTE frags in clayey Ss matrix.	60	881	3			
		WOOCALLA DOLOMITE 62.5 - 73 62.5 - 65: Soft grey clay (probably Magazine Hill type)	63	882	3			
		65 - 73: Layers of grey to black DOLOMITIC SHALE interbedded & finely laminated grey to white DOLOMITE and minor SANDSTONE beds & DOLOMITIC BRECCIA horizons;	66	883	3			
	70	Rock quite soft — partly weathered to clay. Beds generally no more than 5-10 cm thick. Minor py-cpy throughout	69	884	4			
			73					
		Top of hole caving in.						
		HOLE ABANDONED.						
		GROUNDWATER: Approx. 1000 gals/hr T.D.S. 1.2 %						

Core bed's angle
and joint spacing

PROJECT AREA: MT. GUNSON

PROJECT No. 401

0656

SPUDDER: 30-7-74

COMPLETED: 31-7-74

LOCATION: INPUT ANOMALY 1

CO-ORDS: X: Y:

ELEVATION: DIRECTION:

INCLINATION: 90° TOTAL DEPTH: 44 m

HOLE TYPE: ROTARY & HAMMER

DRILLING CONTRACTOR: W.L. SIDES

DRILLER: B. DOWN

LOGGED BY: P. JONES DATE:

BIT SIZE: 4 3/4" TO

TO TO

CORE RECOVERY	METRAGE	DESCRIPTION	Core bedd'g angle and joint spacing	LOG SCALE: 1 : 200	SAMPLE No.	Assayed length	ASSAY VALUE			
							Cu	Pb	Zn	
NON-CORING	0	UNCONSOLIDATED SEDIMENTS 0-27		0						
		0-12 : Sand & minor clay			88885	6				
		Samples damp below 6 m		6						
					886	6				
	10			12						
		12-23 : Red sandy clay. Tough ironstone bands (ca 10cm thick) at 18.5 & 22			887	6				
				18						
	20				888	6				
		23-26 : White clay; fairly firm.		24						
		26-27 : Gravel - pebbles of QTE & silicified ss.			889	3				
		WHYALLA SANDSTONE 27-43		27						
					890	3				
	30	27-39 : Lithic ss, silicified at top, & with hard siliceous bands throughout. Generally white to yellow, but some pink to red layers.		30						
				33						
					891	3				
				36						
					892	3				
					893	3				
	40	39-43 : Basal Breccia - pebbles of Qtz & frags. of red QTE in ss & white clay matrix.		39						
				42						
					894	3				

0544


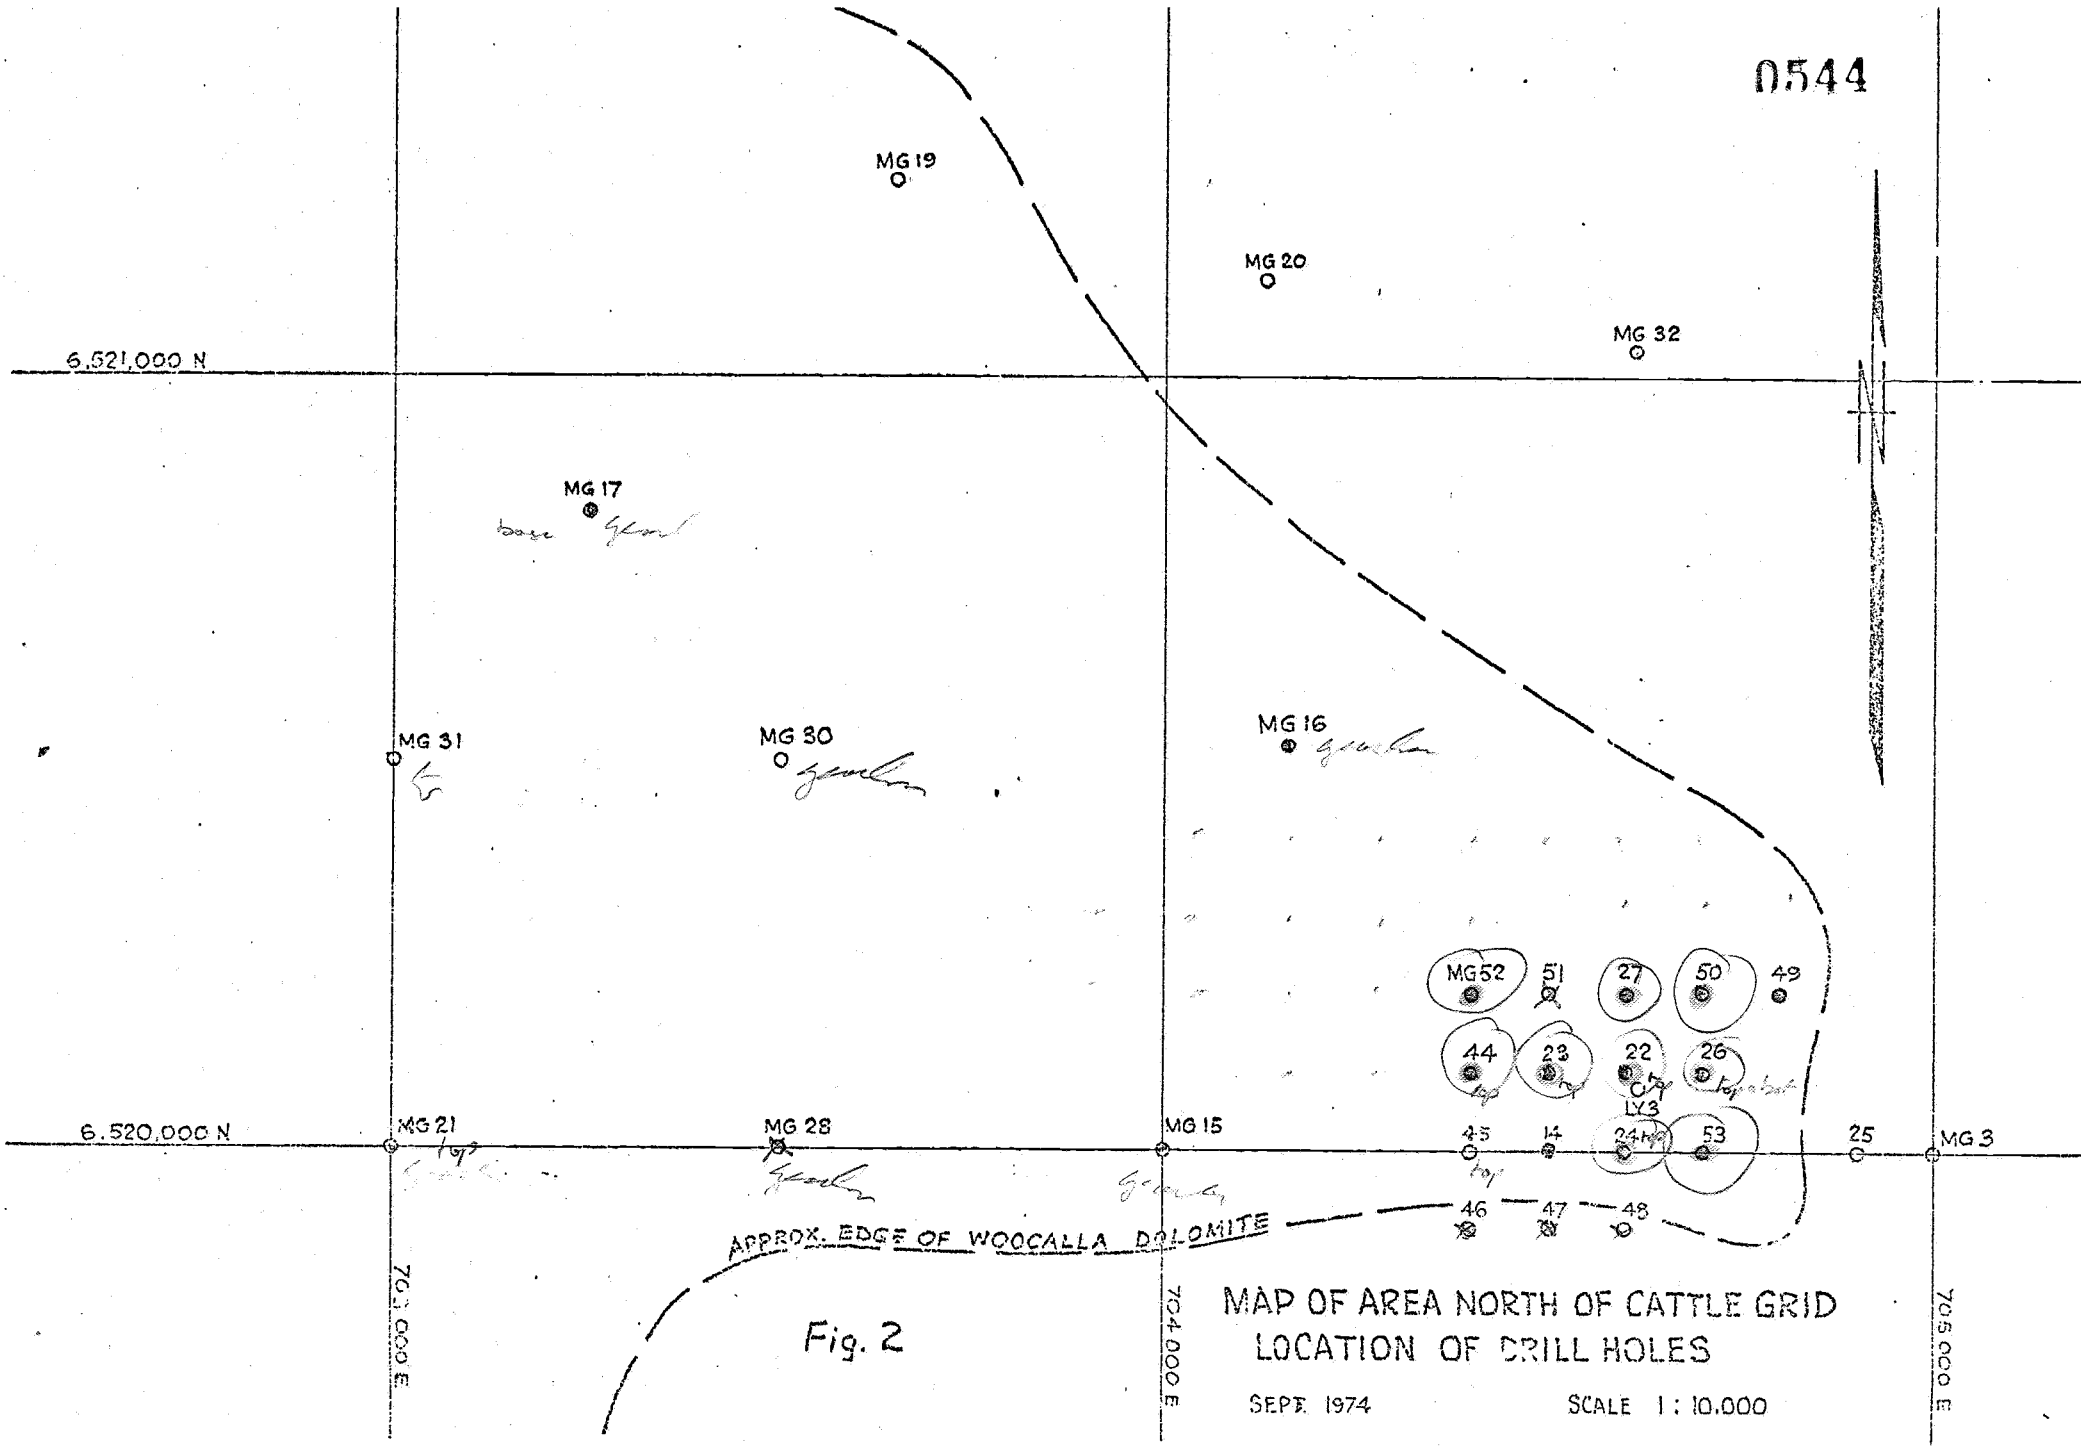


FIG. 3.
MAP SHOWING STRATIGRAPHIC
HOLES DRILLED DURING JULY 1974

0546

0 1000 2000 m.

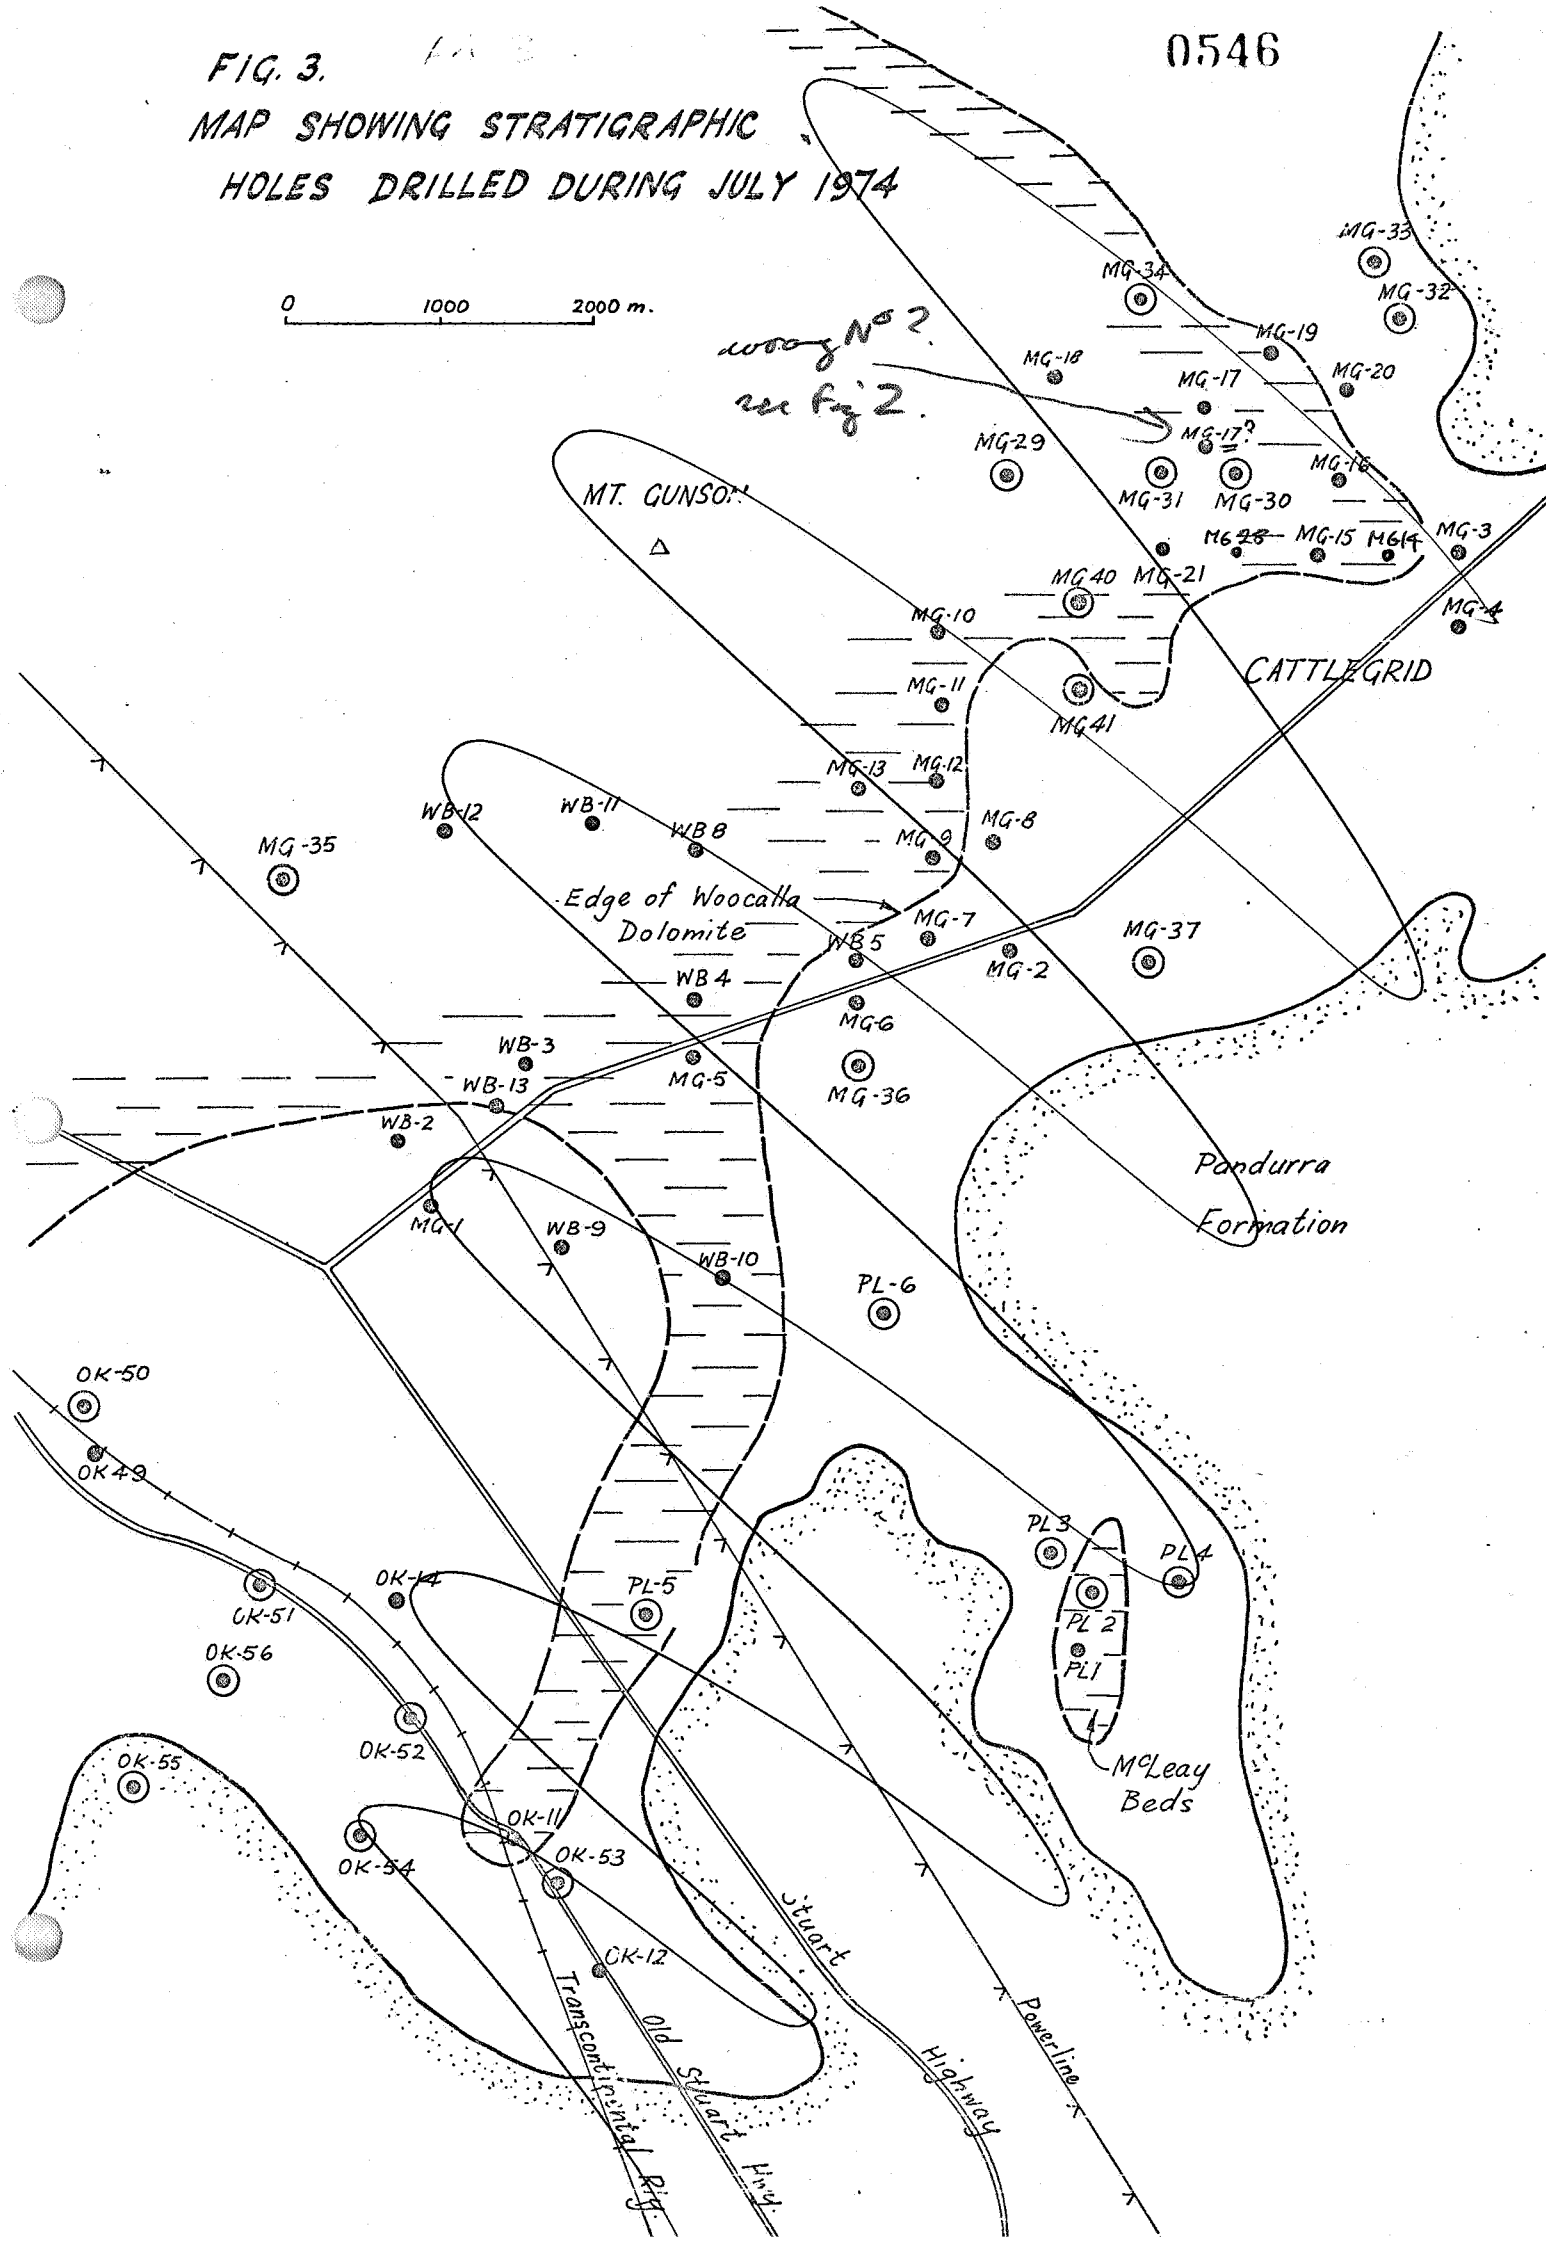

REFERENCE

- X HOLES DRILLED PREVIOUSLY
- HOLES DRILLED SEPT. '74
- NOT DRILLED DUE TO LACK OF ACCESS

MAP SCALE 1:250,000

PRINCE OF WALES PTY. LIMITED

0548

ISLAND

LAGOON

SQUARE LAKE

31° 20'

OK39X OK40X

MT. MOSELEY
OK33X
X OK7

LAKE BEVISS

X OK26

OK9X

Martharinga Wells

X MF4

● MF13

MF6X

LAKE FINNISS

31° 45'

X MF3

X MF2

MF1

MF5

● MF7

WATER BORE X Yalymboo

LD4 X

● MF8

LAKE

MACKFARLANE

MF12 ●

● MF9

● MF10

Fig. 4. ISLAND LAGOON AREA

1/25 km to MF11

VII

PACMINEX PTY. LIMITED

0658

15-19 BENT STREET
BOX 221 ROYAL EXCHANGE
SYDNEY 2000 AUSTRALIA
CABLE "PACMINEX" SYDNEY
TELEX AA20285
TELEPHONE 2 0515

PACMINEX

Ref : RWG/EMP

22nd October, 1974.

The Director of Mines,
Department of Mines,
Box 38, Rundle Street P.O.,
ADELAIDE, 5000.
South Australia.

Dear Sir,

Quarterly Report on E.L. 81
Mt. Gunson Area, S.A., for the
period ending 19th October, 1974.

Please find enclosed one copy of the above report together with maps and appendices.

Expenditure for the period 1st July to 30th September, 1974, was \$45,324, and was incurred as follows :-

Geological, Geochemical and General Logistics	21,104
Drilling and Sampling	<u>24,220</u>
	<u>\$ 45,324</u>

Please note that the report is for the period ending 19th October, 1974, but the financial statement is for the three month period ending 30th September, 1974.

Yours faithfully,



R.N. SELMAN,
Managing Director.

Enc.



NOTED

Director of Mines