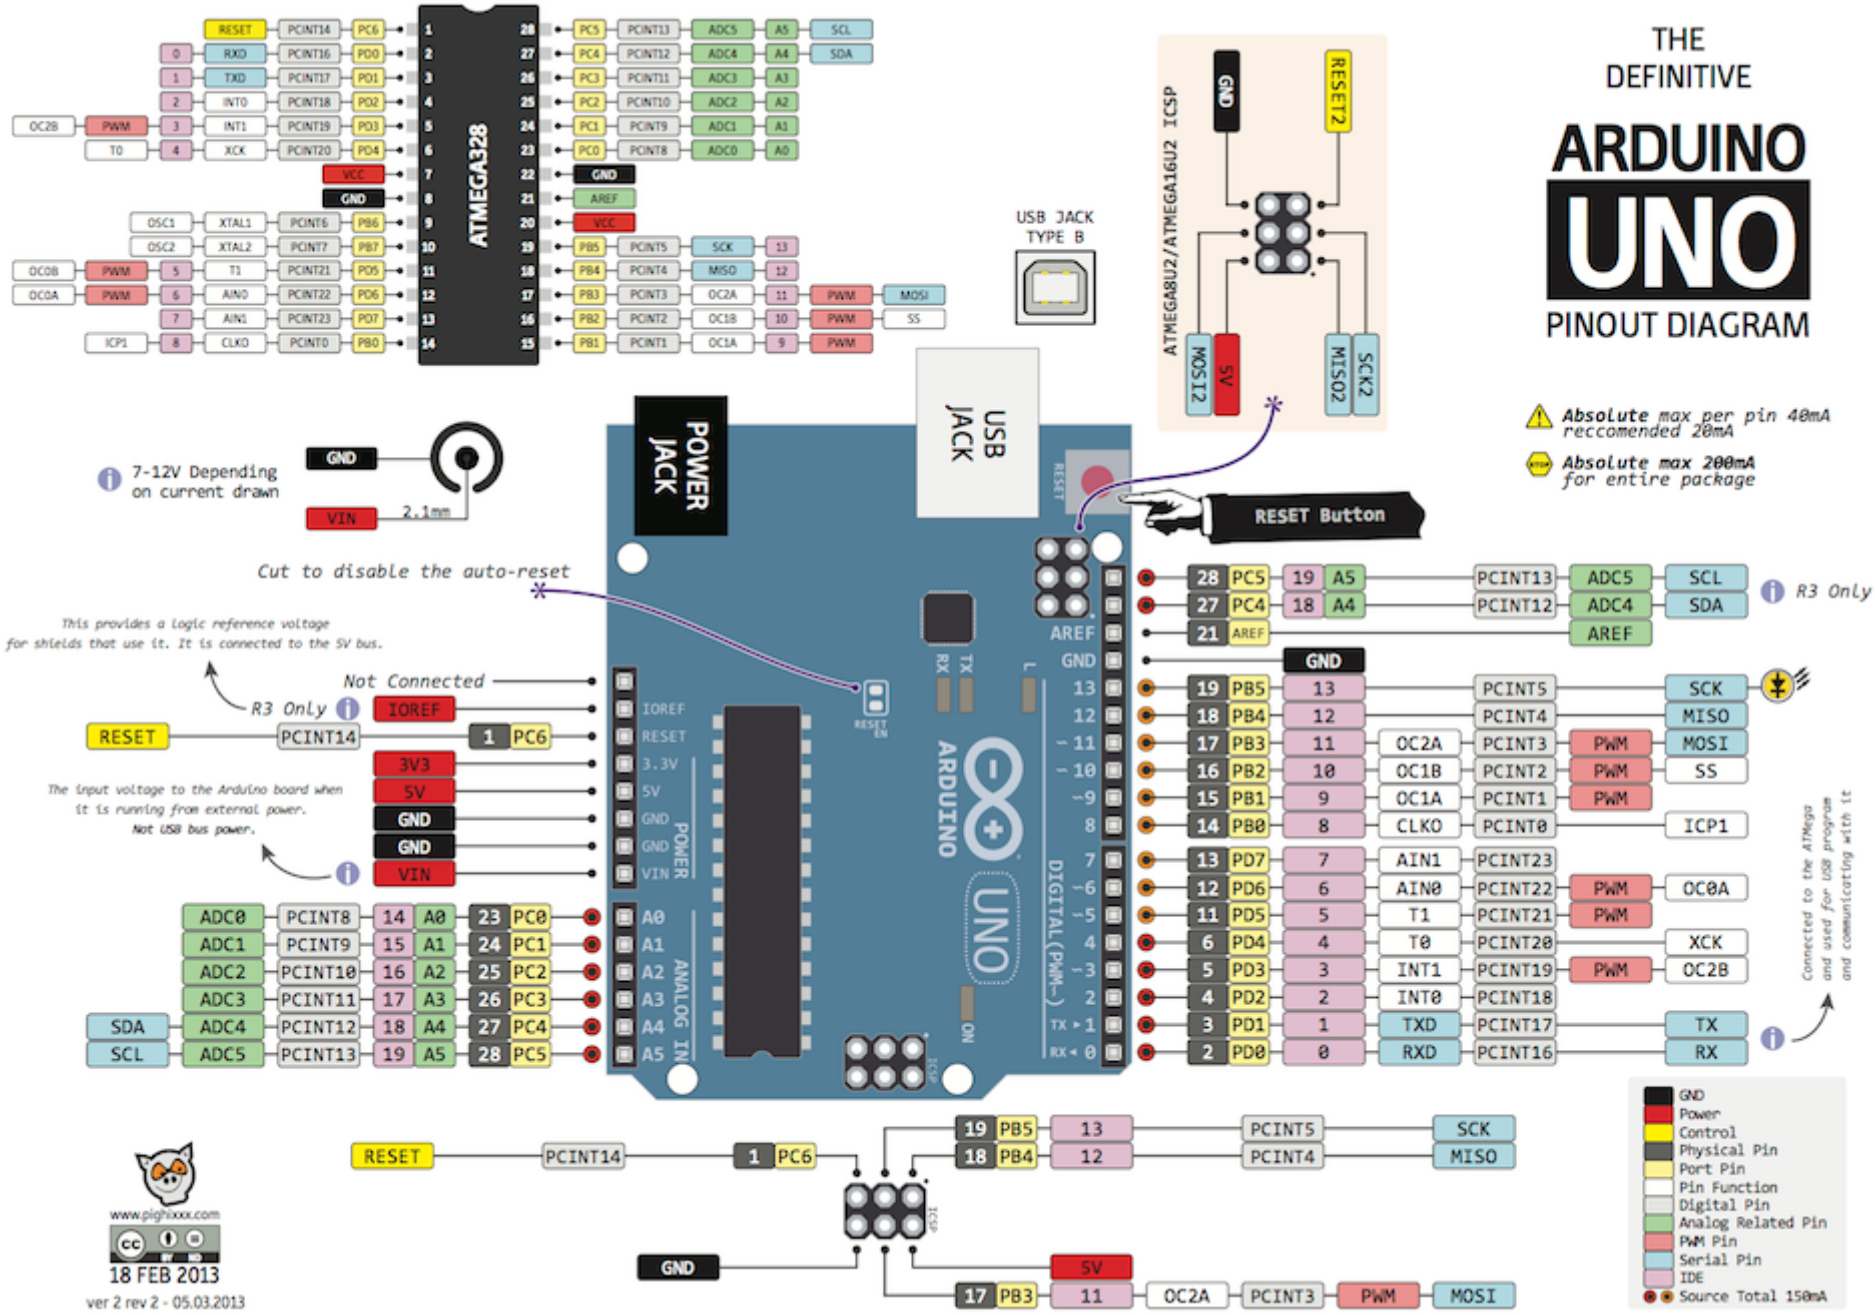

THE DEFINITIVE
ARDUINO UNO
PINOUT DIAGRAM
ATMEGA328
ATMEGA8U2/ATMEGA16U2 ICSP
USB JACK TYPE B
POWER JACK
USB JACK
RESET Button
7-12V Depending on current drawn
2.1mm
Cut to disable the auto-reset
This provides a logic reference voltage for shields that use it. It is connected to the 5V bus.
Not Connected
R3 Only
The input voltage to the Arduino board when it is running from external power. Not USB bus power.
Absolute max per pin 40mA reccomended 20mA
Absolute max 200mA for entire package
Connected to the ATMega and used for USB program and communicating with it
www.pighixxx.com
18 FEB 2013
ver 2 rev 2 - 05.03.2013
GND
Power
Control
Physical Pin
Port Pin
Pin Function
Digital Pin
Analog Related Pin
PWM Pin
Serial Pin
IDE
Source Total 150mA