Description

□Features:

1. The module adopts relay control, the maximum AC voltage is 250V, the maximum AC current is 10A, the maximum DC voltage is 30V, and the maximum DC current is 10A;

2. It is driven by 8550 triode, with strong driving ability;

3. Equipped with fixing bolt holes for easy installation

4. Power indicator (green), relay status indicator (red)

5. The blue KF301 wiring terminal is more convenient to connect to the control line.

6. Suitable for: electronics enthusiasts, smart home DIY, student experiments, industrial control, automation projects, etc.

□Technical Specifications

Control signal: Low level valid (directly compatible with microcontrollers, Arduino, PLC, etc.)

Input voltage: 3V~5V DC (compatible with common development board logic levels)

Load capacity:

AC□250V ~ 10A DC□30V ~ 10A

Drive mode: 8550 transistor drive

Interface type: KF301 pluggable terminal

Indicator lights: power (green), relay status (red)

Installation method: Bolt fixation (hole position compatible with standard bracket)

□ Instructions for use (wiring example)

VCC → Connect to the positive pole of an external power supply (3V~5V)

GND → Connect to the negative pole of the external power supply

IN → Connect the microcontroller/controller IO port (when low level, the relay is engaged, when high level is disconnected)

⚠ Notes:

Do not overload and ensure that the load is within the rated voltage and current range.

When controlling DC loads, pay attention to the correct connection of the positive and negative poles.

It is recommended to parallel protective circuits at both ends of inductive loads (such as motors and solenoid valves) to extend the lifespan of relays.

 Application scenarios

Smart home: lighting control, socket on/off, curtain motor

Industrial control: power management and signal switching for small equipment

Maker Education: Arduino, Raspberry Pi, STM32 project development

Electrical automation: transformation of timed switches and remote control switches

 Why choose us? Solid materials, reliable relay contact, long service life Clear instructions, simple wiring, even beginners can easily get started Modular design, strong compatibility, can be directly embedded into various projects Provide basic technical support and circuit references, making purchases more reassuring



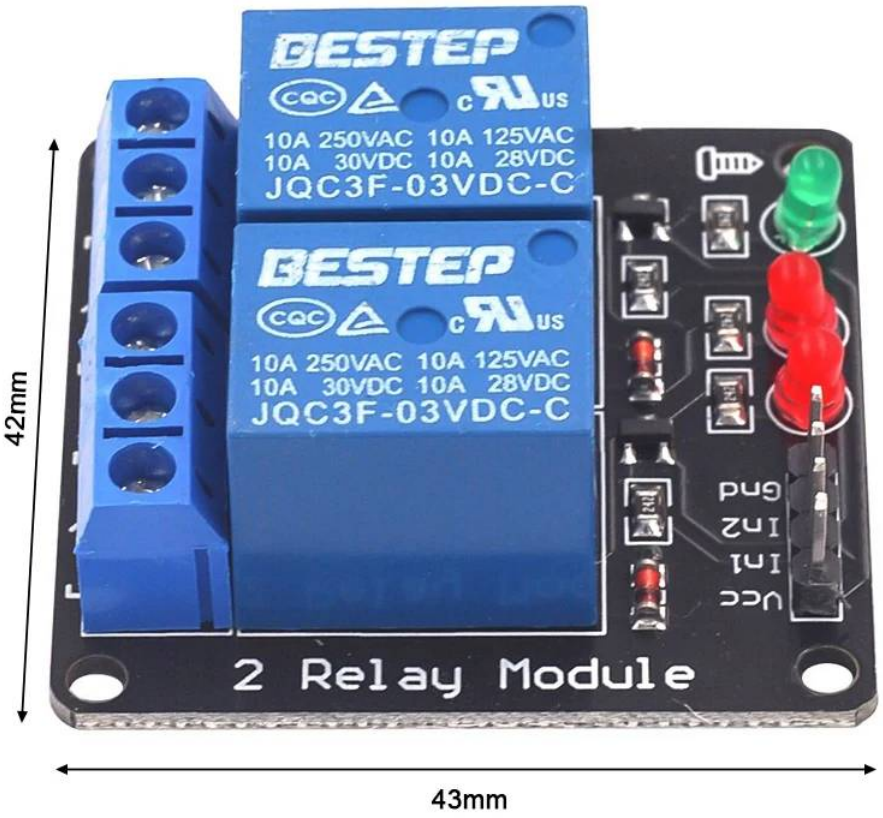

BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
Vcc
In1
Gnd
1 Relay Module

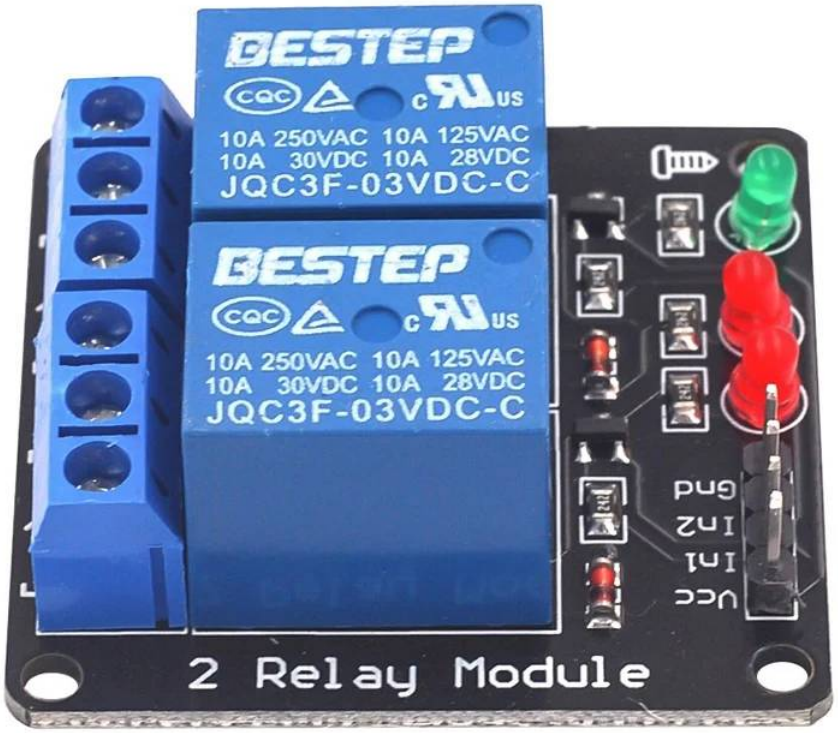

BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
Gnd
In1
Vcc
1 Relay Module
26mm
43mm


BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
Vcc
In1
Gnd
1 Relay Module


BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
1 Relay Module
Vcc
In
Gnd

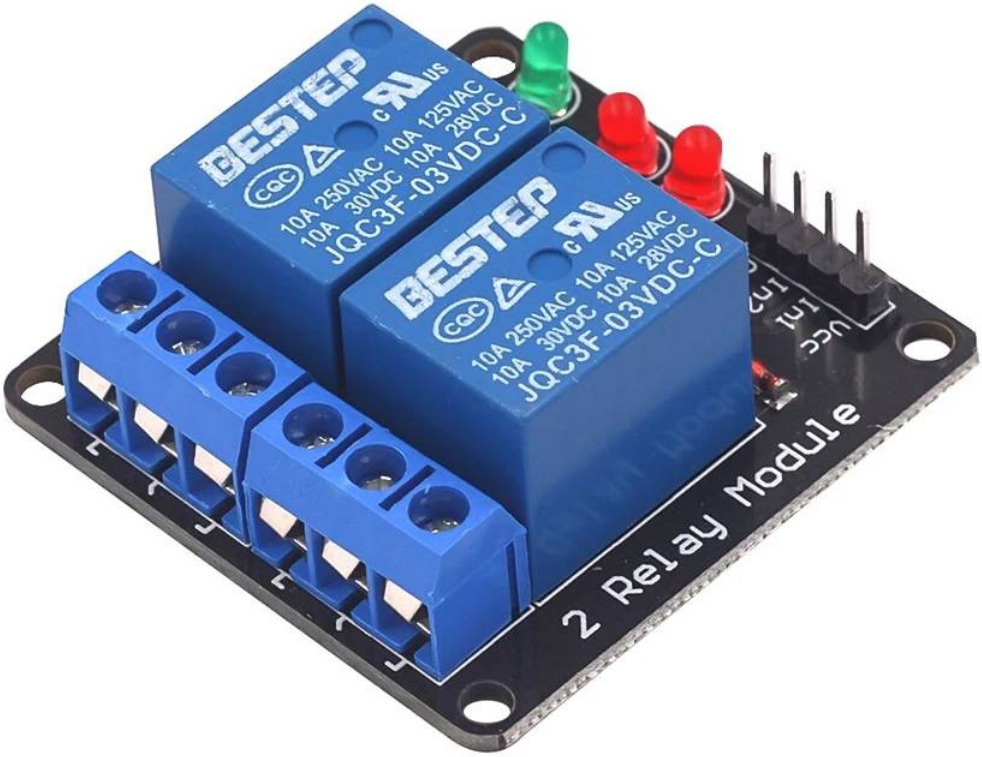

BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
1 Relay Module
GND
IN
VCC


BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
Gnd
In2
In1
Vcc
2 Relay Module
42mm
43mm


BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
Gnd
In2
In1
Vcc
2 Relay Module


BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
Gnd
In2
In1
Vcc
2 Relay Module


BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
Gnd
In2
In1
Vcc
2 Relay Module

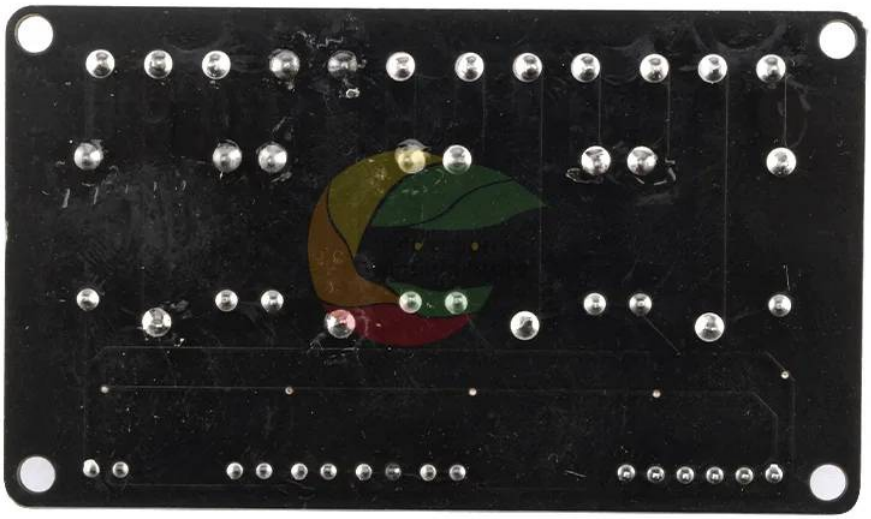

BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
BESTEP
10A 250VAC 10A 125VAC
10A 30VDC 10A 28VDC
JQC3F-03VDC-C
2 Relay Module

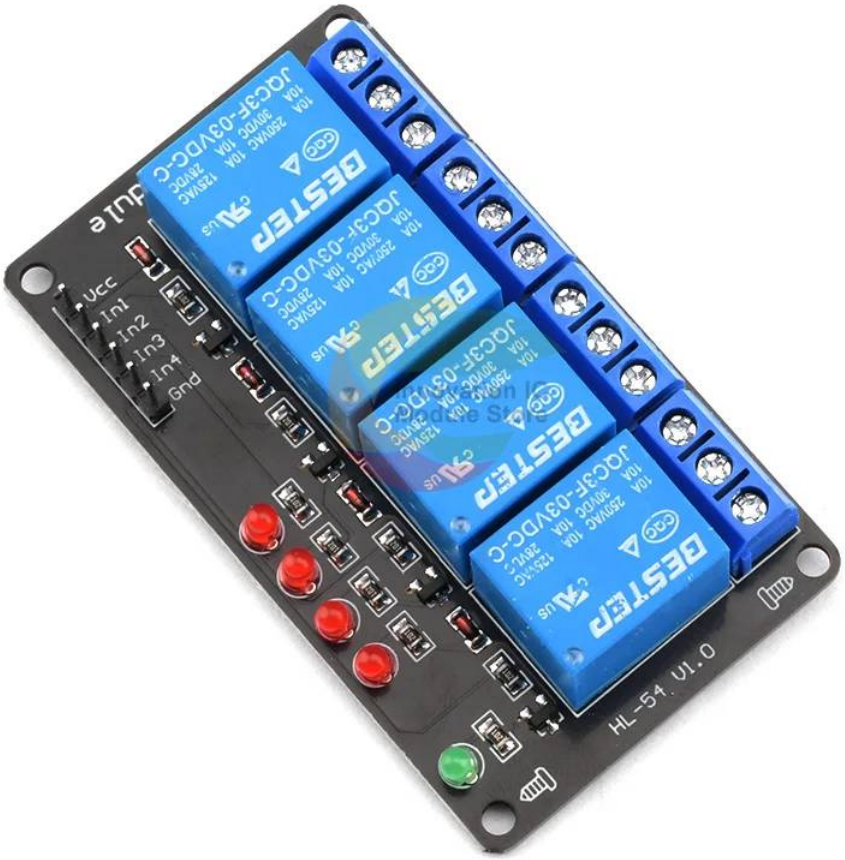

4 Relay Module
HL-54 V1.0
Gnd
In4
In3
In2
In1
Vcc
BESTEP
JQC3F-03VDC-C


BESTEP
JQC3F-03VDC-C
Gnd
In4
In3
In2
In1
Vcc
4 Relay Module


GESTEP
JQC3F-03VDC-C
4 Relay Module


BESTEP
JQC-3F-03VDC-C
HL-54 V1.0

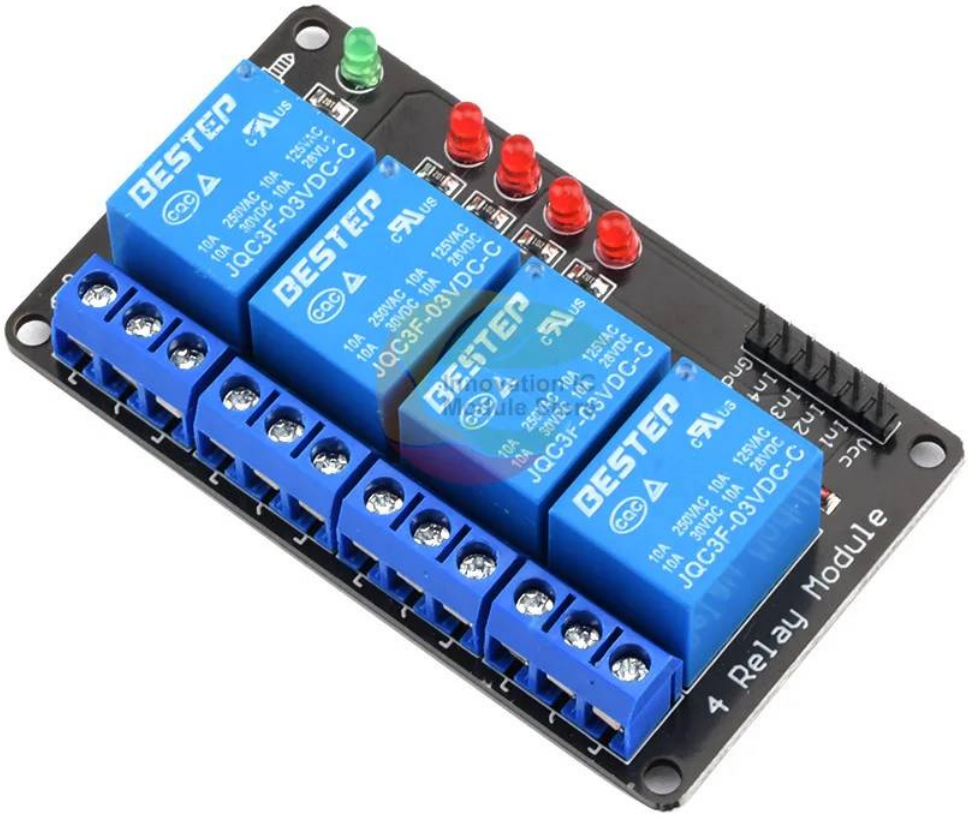



Vcc
In1
In2
In3
In4
Gnd
JQC3F-05VDC-C
HL-54 V1.0


Vcc
In1
In2
In3
In4
Gnd
HL-54 V1.0
BESTEP
JQC3F-03VDC-C


HL-54 V1.0


4 Relay Module


BESTEP
JQC3F-03VDC-C
4 Relay Module


43mm/1.69in
74mm/2.91in
4 Relay Module
Gnd
In4
In3
In2
In1
Vcc
HL-54 V1.0
BESTEP
JQC3F-03VDC-C

Payment

VISA · MasterCard · WESTERN UNION · Maestro · Bank Transfer · PayPal · WebMoney · Boleto!

Shipping Choice

Shipping Method	Courier	Shipping Time
Express Shipping	DHL Express	About 3-10 days
	EMS Shipping	About 3-10 days
Standard Shipping (for order over USD5)	Aliexpress Standard Shipping	About 20-45 days
	Registered Air Mail(china post/e packet-only for USA)	About 40-60 days
Economy Shipping (for order under USD5)	Economy Post(finland economy/ SG economy/China economy)	About 40-60 days

Shopping Notes



Five star feedback



If you have any problems about the order, please feel free to contact us.

Item as described ★★★★★ 5 STAR

Communication ★★★★★ 5 STAR

Shipping speed ★★★★★ 5 STAR

If satisfied with our products,
kindly leave a 5-star rating and share with your friends.