
2x10 0.1" Header Strip

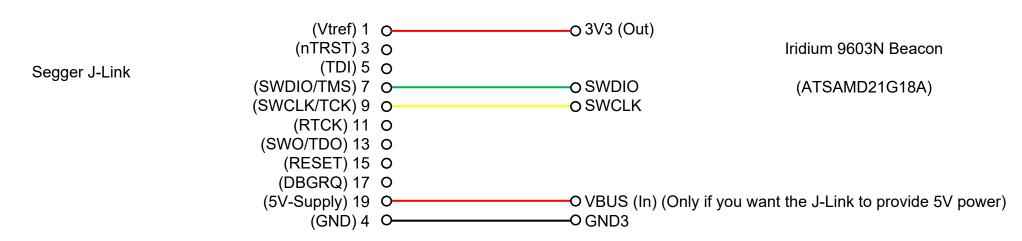

Atmel ATSAMD21G18A Programming

Notes:

Use Atmel Studio
Select Tools\DeviceProgramming
Device is ATSAMD21G18A
Use the J-Link Control Panel to set Target Power On
Use the Fuses tab to set NVMCTRL_BOOTPROT to 0x07 if required