

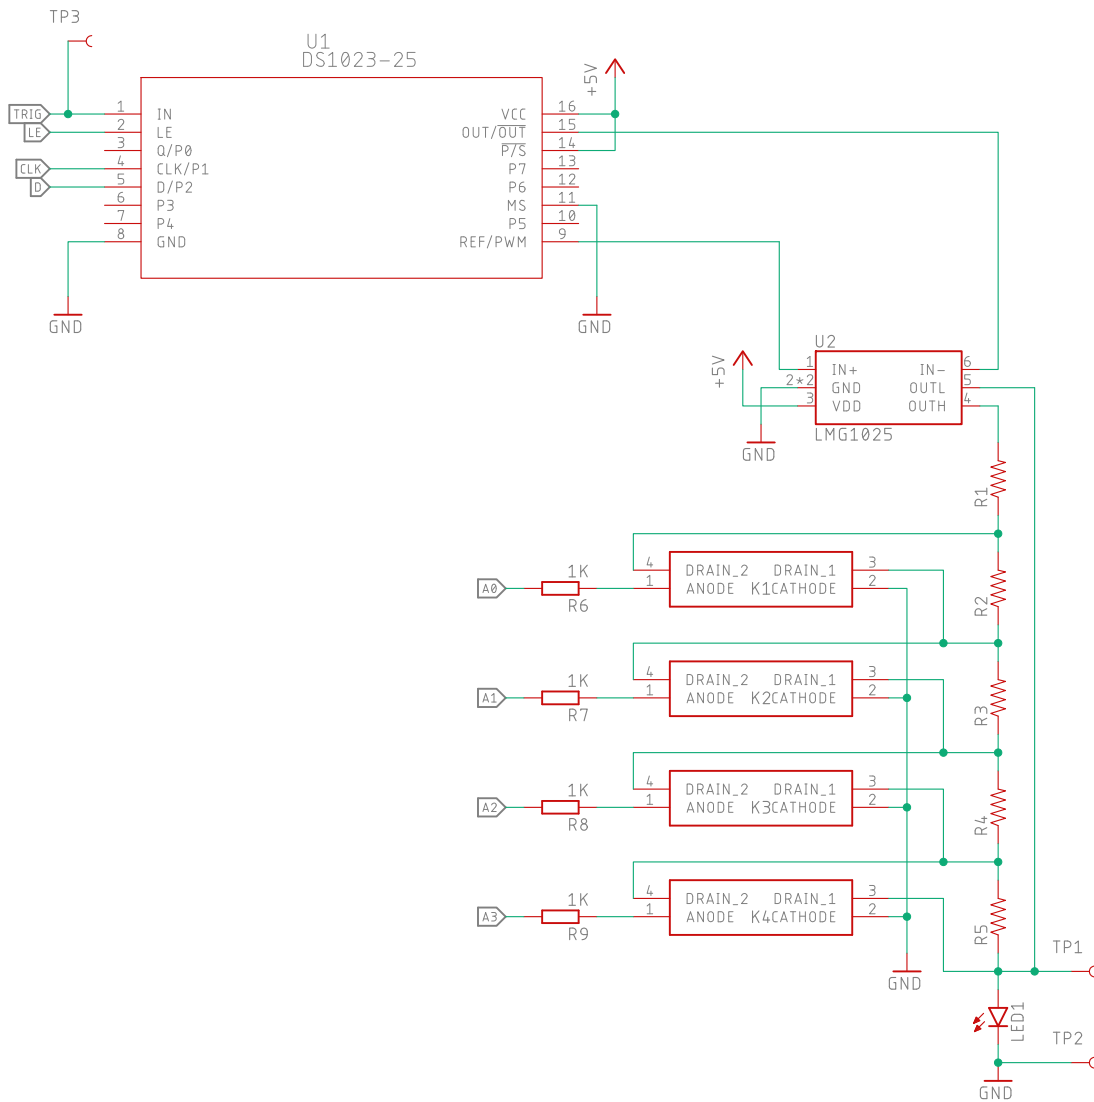


Note:
Board requires 5V power
but all IO signals are 3.3V

Maxim DS1023-25
Programmable Timing Element
(Delay Line)


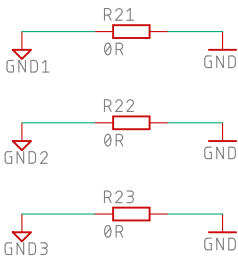


Decoupling Capacitors


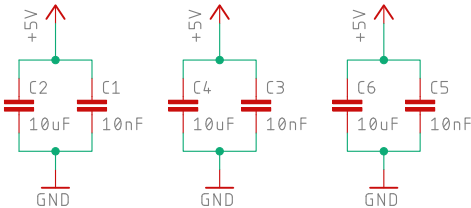


Mounting Hole Grounding

ADT7310
Temperature Sensor
2.7V to 5.5V

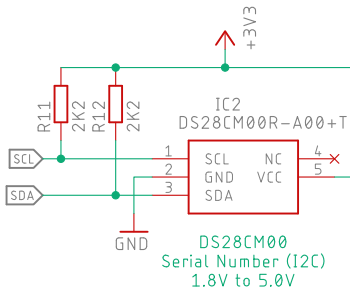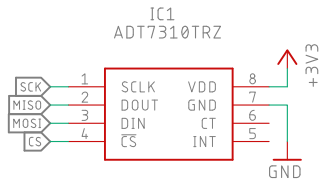

3V3 to 5V Level Shifting

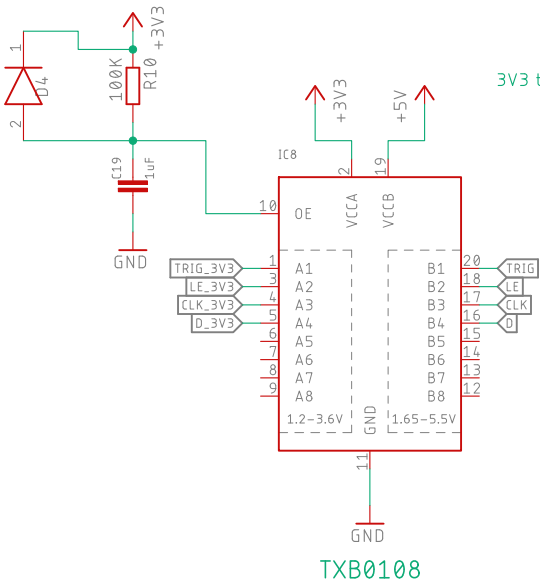

Fiducials



Calibration Flasher LED Board V3

Special Instructions

Flasher_LED_Board

24/07/2020 11:07

Sheet: 1/1