Beej's Guide to Network Programming

Using Internet Sockets

Brian "Beej Jorgensen" Hall
beej@beej.us

Version 3.0.14
September 8, 2009

This book is written in XML using the vim editor on a Slackware Linux box loaded with GNU tools. The cover "art" and diagrams are produced with Inkscape. The XML is converted into HTML and XSL-FO by custom Python scripts. The XSL-FO output is then munged by Apache FOP to produce PDF documents, using Liberation fonts. The toolchain is composed of 100% Free and Open Source Software.

Contents

Contents

1. Intro

Hey Socket programming got you down Is this stuff just a little too difficult to figure out from the **man** pages ou want to do cool Internet programming, but you don t have time to wade through a gob of structs trying to figure out if you have to call **bind()** before you **connect()**, etc., etc.

Well, guess what I ve already done this nasty business, and I m dying to share the information with everyone ou ve come to the right place. This document should give the average competent C programmer the edge s/he needs to get a grip on this networking noise.

And check it out: I ve finally caught up with the future just in the nick of time, too and have updated the Guide for IPv njoy

1.1. Audience

This document has been written as a tutorial, not a complete reference. It is probably at its best when read by individuals who are just starting out with socket programming and are looking for a foothold. It is certainly not the *complete and total* guide to sockets programming, by any means.

Hopefully, though, it ll be just enough for those man pages to start making sense... :-)

1.2. Platform and Compiler

The code contained within this document was compiled on a Linux PC using Gnu s **gcc** compiler. It should, however, build on just about any platform that uses **gcc**. Naturally, this doesn t apply if you re programming for Windows see the section on Windows programming, below.

1.3. Official Homepage and Books For Sale

This official location of this document is `http://beej.us/guide/bgnet/`. There you will also find example code and translations of the guide into various languages.

To buy nicely bound print copies some call them "books" , visit `http://beej.us/guide/url/bgbuy`. I ll appreciate the purchase because it helps sustain my document-writing lifestyle

1.4. Note for Solaris/SunOS Programmers

When compiling for Solaris or SunOS, you need to specify some extra command-line switches for linking in the proper libraries. In order to do this, simply add "`-lnsl -lsocket -lresolv`" to the end of the compile command, like so:

```
$ cc -o server server.c -lnsl -lsocket -lresolv
```

If you still get errors, you could try further adding a "`-lxnet`" to the end of that command line. I don t know what that does, exactly, but some people seem to need it.

Another place that you might find problems is in the call to **setsockopt()**. The prototype differs from that on my Linux box, so instead of:

```
int yes=1;
```

enter this:

```
char yes='1';
```

As I don t have a Sun box, I haven t tested any of the above information it s just what people have told me through email.

1.5. Note for Windows Programmers

At this point in the guide, historically, I ve done a bit of bagging on Windows, simply due to the fact that I don t like it very much. But I should really be fair and tell you that Windows has a huge install base and is obviously a perfectly fine operating system.

They say absence makes the heart grow fonder, and in this case, I believe it to be true. Or maybe it s age. But what I can say is that after a decade-plus of not using Microsoft OSes for my personal work, I m much happier As such, I can sit back and safely say, "Sure, feel free to use Windows " ...Ok yes, it does make me grit my teeth to say that.

So I still encourage you to try Linux[1], BSD[2], or some flavor of Unix, instead.

But people like what they like, and you Windows folk will be pleased to know that this information is generally applicable to you guys, with a few minor changes, if any.

One cool thing you can do is install Cygwin[3], which is a collection of Unix tools for Windows. I ve heard on the grapevine that doing so allows all these programs to compile unmodified.

But some of you might want to do things the Pure Windows Way. That s very gutsy of you, and this is what you have to do: run out and get Unix immediately No, no   I m kidding. I m supposed to be Windows-friendly er these days...

This is what you ll have to do unless you install Cygwin : first, ignore pretty much all of the system header files I mention in here. All you need to include is:

```
#include <winsock.h>
```

Wait   ou also have to make a call to **WSAStartup()** before doing anything else with the sockets library. The code to do that looks something like this:

```
#include <winsock.h>

{
    WSADATA wsaData;   // if this doesn't work
    //WSAData wsaData; // then try this instead

    // MAKEWORD(1,1) for Winsock 1.1, MAKEWORD(2,0) for Winsock 2.0:

    if (WSAStartup(MAKEWORD(1,1), &wsaData) != 0) {
        fprintf(stderr, "WSAStartup failed.\n");
        exit(1);
    }
```

 ou also have to tell your compiler to link in the Winsock library, usually called *wsock32.lib* or *winsock32.lib*, or *ws2_32.lib* for Winsock 2.0. Under   C , this can be done through the `Project` menu, under `Settings....` Click the `Link` tab, and look for the box titled "Object/library modules". Add "wsock32.lib" or whichever lib is your preference to that list.

Or so I hear.

Finally, you need to call **WSACleanup()** when you re all through with the sockets library. See your online help for details.

Once you do that, the rest of the examples in this tutorial should generally apply, with a few exceptions. For one thing, you can t use **close()** to close a socket   you need to use **closesocket()**, instead. Also, **select()** only works with socket descriptors, not file descriptors like 0 for stdin .

There is also a socket class that you can use, CSocket. Check your compilers help pages for more information.

To get more information about Winsock, read the Winsock FA [4] and go from there.

Finally, I hear that Windows has no **fork()** system call which is, unfortunately, used in some of my examples. Maybe you have to link in a POSIX library or something to get it to work, or you can use **CreateProcess()** instead. **fork()** takes no arguments, and **CreateProcess()** takes about 4 billion arguments. If you re not up to that, the **CreateThread()** is a little easier to digest...unfortunately a discussion about multithreading is beyond the scope of this document. I can only talk about so much, you know

1.6. Email Policy

I m generally available to help out with email uestions so feel free to write in, but I can t guarantee a response. I lead a pretty busy life and there are times when I just can t answer a uestion you have. When that s the case, I usually just delete the message. It s nothing personal I just won t ever have the time to give the detailed answer you re uire.

---

1. http://www.linux.com/
2. http://www.bsd.org/
3. http://www.cygwin.com/
4. http://tangentsoft.net/wskfaq/

As a rule, the more complex the uestion, the less likely I am to respond. If you can narrow down your uestion before mailing it and be sure to include any pertinent information like platform, compiler, error messages you re getting, and anything else you think might help me troubleshoot , you re much more likely to get a response. For more pointers, read SR s document, How To Ask uestions The Smart Way[5].

If you don t get a response, hack on it some more, try to find the answer, and if it s still elusive, then write me again with the information you ve found and hopefully it will be enough for me to help out.

Now that I ve badgered you about how to write and not write me, I d just like to let you know that I *fully* appreciate all the praise the guide has received over the years. It s a real morale boost, and it gladdens me to hear that it is being used for good :-) Thank you

1.7. Mirroring

ou are more than welcome to mirror this site, whether publicly or privately. If you publicly mirror the site and want me to link to it from the main page, drop me a line at `beej@beej.us`.

1.8. Note for Translators

If you want to translate the guide into another language, write me at `beej@beej.us` and I ll link to your translation from the main page. Feel free to add your name and contact info to the translation.

Please note the license restrictions in the Copyright and Distribution section, below.

If you want me to host the translation, just ask. I ll also link to it if you want to host it either way is fine.

1.9. Copyright and Distribution

Beej s Guide to Network Programming is Copyright © 2009 Brian "Beej Jorgensen" Hall.

With specific exceptions for source code and translations, below, this work is licensed under the Creative Commons Attribution- Noncommercial- No Derivative Works 3.0 License. To view a copy of this license, visit `http://creativecommons.org/licenses/by-nc-nd/3.0/` or send a letter to Creative Commons, 1 1 Second Street, Suite 300, San Francisco, California, 94105, USA.

One specific exception to the "No Derivative Works" portion of the license is as follows: this guide may be freely translated into any language, provided the translation is accurate, and the guide is reprinted in its entirety. The same license restrictions apply to the translation as to the original guide. The translation may also include the name and contact information for the translator.

The C source code presented in this document is hereby granted to the public domain, and is completely free of any license restriction.

ducators are freely encouraged to recommend or supply copies of this guide to their students.

Contact `beej@beej.us` for more information.

---

5. `http://www.catb.org/~esr/faqs/smart-questions.html`

2. What is a socket?

ou hear talk of "sockets" all the time, and perhaps you are wondering just what they are exactly. Well, they re this: a way to speak to other programs using standard Unix file descriptors.

What

Ok   you may have heard some Unix hacker state, "Jeez, *everything* in Unix is a file " What that person may have been talking about is the fact that when Unix programs do any sort of I/O, they do it by reading or writing to a file descriptor. A file descriptor is simply an integer associated with an open file. But and here s the catch , that file can be a network connection, a FIFO, a pipe, a terminal, a real on-the-disk file, or just about anything else.   verything in Unix *is* a file So when you want to communicate with another program over the Internet you re gonna do it through a file descriptor, you d better believe it.

"Where do I get this file descriptor for network communication, Mr. Smarty-Pants " is probably the last uestion on your mind right now, but I m going to answer it anyway: ou make a call to the **socket()** system routine. It returns the socket descriptor, and you communicate through it using the specialized **send()** and **recv() man send**, **man recv** socket calls.

"But, hey " you might be exclaiming right about now. "If it s a file descriptor, why in the name of Neptune can t I just use the normal **read()** and **write()** calls to communicate through the socket " The short answer is, " ou can " The longer answer is, " ou can, but **send()** and **recv()** offer much greater control over your data transmission."

What next   How about this: there are all kinds of sockets. There are DARPA Internet addresses Internet Sockets , path names on a local node Unix Sockets , CCITT X.25 addresses X.25 Sockets that you can safely ignore , and probably many others depending on which Unix flavor you run. This document deals only with the first: Internet Sockets.

2.1. Two Types of Internet Sockets

What s this   There are two types of Internet sockets   es. Well, no. I m lying. There are more, but I didn t want to scare you. I m only going to talk about two types here.   xcept for this sentence, where I m going to tell you that "Raw Sockets" are also very powerful and you should look them up.

All right, already. What are the two types   One is "Stream Sockets" the other is "Datagram Sockets", which may hereafter be referred to as "SOCK_STREAM" and "SOCK_DGRAM", respectively. Datagram sockets are sometimes called "connectionless sockets". Though they can be **connect()**d if you really want. See **connect()**, below.

Stream sockets are reliable two-way connected communication streams. If you output two items into the socket in the order "1, 2", they will arrive in the order "1, 2" at the opposite end. They will also be error-free. I m so certain, in fact, they will be error-free, that I m just going to put my fingers in my ears and chant *la la la la* if anyone tries to claim otherwise.

What uses stream sockets   Well, you may have heard of the **telnet** application, yes   It uses stream sockets. All the characters you type need to arrive in the same order you type them, right   Also, web browsers use the HTTP protocol which uses stream sockets to get pages. Indeed, if you telnet to a web site on port 0, and type "GET / HTTP/1.0" and hit R TURN twice, it ll dump the HTML back at you

How do stream sockets achieve this high level of data transmission uality   They use a protocol called "The Transmission Control Protocol", otherwise known as "TCP" see RFC 93 for extremely detailed info on TCP. TCP makes sure your data arrives se uentially and error-free.   ou may have heard "TCP" before as the better half of "TCP/IP" where "IP" stands for "Internet Protocol" see RFC 91 . IP deals primarily with Internet routing and is not generally responsible for data integrity.

Cool. What about Datagram sockets   Why are they called connectionless   What is the deal, here, anyway   Why are they unreliable   Well, here are some facts: if you send a datagram, it may arrive. It may arrive out of order. If it arrives, the data within the packet will be error-free.

`.http://tools.ietf.org/html/rfc793`
`.http://tools.ietf.org/html/rfc791`

Datagram sockets also use IP for routing, but they don t use TCP they use the "User Datagram Protocol", or "UDP" see RFC   .

Why are they connectionless   Well, basically, it s because you don t have to maintain an open connection as you do with stream sockets.   ou just build a packet, slap an IP header on it with destination information, and send it out. No connection needed. They are generally used either when a TCP stack is unavailable or when a few dropped packets here and there don t mean the end of the Universe. Sample applications: **tftp** trivial file transfer protocol, a little brother to FTP , **dhcpcd** a DHCP client , multiplayer games, streaming audio, video conferencing, etc.

"Wait a minute   **tftp** and **dhcpcd** are used to transfer binary applications from one host to another Data can t be lost if you expect the application to work when it arrives What kind of dark magic is this "

Well, my human friend, **tftp** and similar programs have their own protocol on top of UDP. For example, the tftp protocol says that for each packet that gets sent, the recipient has to send back a packet that says, "I got it " an "ACK" packet. If the sender of the original packet gets no reply in, say, five seconds, he ll re-transmit the packet until he finally gets an ACK. This acknowledgment procedure is very important when implementing reliable `SOCK_DGRAM` applications.

For unreliable applications like games, audio, or video, you just ignore the dropped packets, or perhaps try to cleverly compensate for them.   uake players will know the manifestation this effect by the technical term: *accursed lag*. The word "accursed", in this case, represents any extremely profane utterance.

Why would you use an unreliable underlying protocol   Two reasons: speed and speed. It s way faster to fire-and-forget than it is to keep track of what has arrived safely and make sure it s in order and all that. If you re sending chat messages, TCP is great if you re sending 40 positional updates per second of the players in the world, maybe it doesn t matter so much if one or two get dropped, and UDP is a good choice.

2.2. Low level Nonsense and Network Theory

Since I just mentioned layering of protocols, it s time to talk about how networks really work, and to show some examples of how `SOCK_DGRAM` packets are built. Practically, you can probably skip this section. It s good background, however.

$$\boxed{\texttt{Ethernet}\ \boxed{\texttt{IP}\ \boxed{\texttt{UDP}\ \boxed{\texttt{TFTP}\ \boxed{\textbf{\textit{Data}}}}}}}$$

Data Encapsulation.

Hey, kids, it s time to learn about *Data Encapsulation* This is very very important. It s so important that you might just learn about it if you take the networks course here at Chico State ; -) . Basically, it says this: a packet is born, the packet is wrapped "encapsulated" in a header and rarely a footer by the first protocol say, the TFTP protocol , then the whole thing TFTP header included is encapsulated again by the next protocol say, UDP , then again by the next IP , then again by the final protocol on the hardware physical layer say,   thernet .

When another computer receives the packet, the hardware strips the   thernet header, the kernel strips the IP and UDP headers, the TFTP program strips the TFTP header, and it finally has the data.

Now I can finally talk about the infamous *Layered Network Model* aka "ISO/OSI" . This Network

Presentation

Session

Transport

Network

Data Link

Physical

The Physical Layer is the hardware serial, thernet, etc. . The Application Layer is just about as far from the physical layer as you can imagine   it s the place where users interact with the network.

Now, this model is so general you could probably use it as an automobile repair guide if you really wanted to. A layered model more consistent with Unix might be:

Application Layer *telnet, ftp, etc.*

Host-to-Host Transport Layer *TCP, UDP*

Internet Layer *IP and routing*

Network Access Layer *Ethernet, wi-fi, or whatever*

At this point in time, you can probably see how these layers correspond to the encapsulation of the original data.

See how much work there is in building a simple packet Jeez And you have to type in the packet headers yourself using "**cat**" Just kidding. All you have to do for stream sockets is **send()** the data out. All you have to do for datagram sockets is encapsulate the packet in the method of your choosing and **sendto()** it out. The kernel builds the Transport Layer and Internet Layer on for you and the hardware does the Network Access Layer. Ah, modern technology.

So ends our brief foray into network theory. Oh yes, I forgot to tell you everything I wanted to say about routing: nothing That s right, I m not going to talk about it at all. The router strips the packet to the IP header, consults its routing table, blah blah blah. Check out the IP RFC[9] if you really really care. If you never learn about it, well, you ll live.

---

9. `http://tools.ietf.org/html/rfc791`

3. IP Addresses, `structs`, and Data Munging

Here s the part of the game where we get to talk code for a change.

But first, let s discuss more non-code   ay First I want to talk about IP addresses and ports for just a tad so we have that sorted out. Then we ll talk about how the sockets API stores and manipulates IP addresses and other data.

3.1. IP Addresses, versions 4 and 6

In the good old days back when Ben Kenobi was still called Obi Wan Kenobi, there was a wonderful network routing system called The Internet Protocol   ersion 4, also called IPv4. It had addresses made up of four bytes A.K.A. four "octets" , and was commonly written in "dots and numbers" form, like so: `192.0.2.111`.

ou ve probably seen it around.

In fact, as of this writing, virtually every site on the Internet uses IPv4.

veryone, including Obi Wan, was happy. Things were great, until some naysayer by the name of int Cerf warned everyone that we were about to run out of IPv4 addresses

Besides warning everyone of the Coming IPv4 Apocalypse Of Doom And Gloom,   int Cerf[10] is also well-known for being The Father Of The Internet. So I really am in no position to second-guess his judgment.

Run out of addresses How could this be I mean, there are like billions of IP addresses in a 32-bit IPv4 address. Do we really have billions of computers out there

es.

Also, in the beginning, when there were only a few computers and everyone thought a billion was an impossibly large number, some big organizations were generously allocated millions of IP addresses for their own use. Such as Xerox, MIT, Ford, HP, IBM, G , AT T, and some little company called Apple, to name a few.

In fact, if it weren t for several stopgap measures, we would have run out a long time ago.

But now we re living in an era where we re talking about every human having an IP address, every computer, every calculator, every phone, every parking meter, and why not every puppy dog, as well.

And so, IPv was born. Since   int Cerf is probably immortal even if his physical form should pass on, heaven forbid, he is probably already existing as some kind of hyper-intelligent   LI A[11] program out in the depths of the Internet2 , no one wants to have to hear him say again "I told you so" if we don t have enough addresses in the next version of the Internet Protocol.

What does this suggest to you

That we need a *lot* more addresses. That we need not just twice as many addresses, not a billion times as many, not a thousand trillion times as many, but *79 MILLION BILLION TRILLION times as many possible addresses!* That ll show em

ou re saying, "Beej, is that true I have every reason to disbelieve large numbers." Well, the difference between 32 bits and 12 bits might not sound like a lot it s only 9 more bits, right But remember, we re talking powers here: 32 bits represents some 4 billion numbers 2^{32} , while 12 bits represents about 340 trillion trillion trillion numbers for real, 2^{12} . That s like a million IPv4 Internets for *every single star in the Universe*.

Forget this dots-and-numbers look of IPv4, too now we ve got a hexadecimal representation, with each two-byte chunk separated by a colon, like this: `2001:0db8:c9d2:aee5:73e3:934a:a5ae:9551`.

That s not all Lots of times, you ll have an IP address with lots of zeros in it, and you can compress them between two colons. And you can leave off leading zeros for each byte pair. For instance, each of these pairs of addresses are e uivalent:

```
2001:0db8:c9d2:0012:0000:0000:0000:0051
2001:db8:c9d2:12::51
```

---

10. `http://en.wikipedia.org/wiki/Vinton_Cerf`
11. `http://en.wikipedia.org/wiki/ELIZA`

```
2001:0db8:ab00:0000:0000:0000:0000:0000
2001:db8:ab00::

0000:0000:0000:0000:0000:0000:0000:0001
::1
```

The address `::1` is the *loopback address*. It always means "this machine I'm running on now". In IPv4, the loopback address is 127.0.0.1.

Finally, there's an IPv4-compatibility mode for IPv6 addresses that you might come across. If you want, for example, to represent the IPv4 address 192.0.2.33 as an IPv6 address, you use the following notation: "`::ffff:192.0.2.33`".

We're talking serious fun.

In fact, it's such serious fun, that the Creators of IPv6 have quite cavalierly lopped off trillions and trillions of addresses for reserved use, but we have so many, frankly, who's even counting anymore? There are plenty left over for every man, woman, child, puppy, and parking meter on every planet in the galaxy. And believe me, every planet in the galaxy has parking meters. You know it's true.

3.1.1. Subnets

For organizational reasons, it's sometimes convenient to declare that "this first part of this IP address up through this bit is the *network portion* of the IP address, and the remainder is the *host portion*.

For instance, with IPv4, you might have `192.0.2.12`, and we could say that the first three bytes are the network and the last byte was the host. Or, put another way, we're talking about host `12` on network `192.0.2.0` (see how we zero out the byte that was the host).

And now for more outdated information! Ready? In the Ancient Times, there were "classes" of subnets, where the first one, two, or three bytes of the address was the network part. If you were lucky enough to have one byte for the network and three for the host, you could have 24 bits-worth of hosts on your network (24 million or so). That was a "Class A" network. On the opposite end was a "Class C", with three bytes of network, and one byte of host (256 hosts, minus a couple that were reserved).

So as you can see, there were just a few Class As, a huge pile of Class Cs, and some Class Bs in the middle.

The network portion of the IP address is described by something called the *netmask*, which you bitwise-AND with the IP address to get the network number out of it. The netmask usually looks something like `255.255.255.0`. (E.g. with that netmask, if your IP is `192.0.2.12`, then your network is `192.0.2.12` AND `255.255.255.0` which gives `192.0.2.0`.)

Unfortunately, it turned out that this wasn't fine-grained enough for the eventual needs of the Internet; we were running out of Class C networks quite quickly, and we were most definitely out of Class As, so don't even bother to ask. To remedy this, The Powers That Be allowed for the netmask to be an arbitrary number of bits, not just 8, 16, or 24. So you might have a netmask of, say `255.255.255.252`, which is 30 bits of network, and 2 bits of host allowing for four hosts on the network. (Note that the netmask is *ALWAYS* a bunch of 1-bits followed by a bunch of 0-bits.)

But it's a bit unwieldy to use a big string of numbers like `255.192.0.0` as a netmask. First of all, people don't have an intuitive idea of how many bits that is, and secondly, it's really not compact. So the New Style came along, and it's much nicer. You just put a slash after the IP address, and then follow that by the number of network bits in decimal. Like this: `192.0.2.12/30`.

Or, for IPv6, something like this: `2001:db8::/32` or `2001:db8:5413:4028::9db9/64`.

3.1.2. Port Numbers

If you'll kindly remember, I presented you earlier with the Layered Network Model which had the Internet Layer (IP) split off from the Host-to-Host Transport Layer (TCP and UDP). Get up to speed on that before the next paragraph.

Turns out that besides an IP address (used by the IP layer), there is another address that is used by TCP (stream sockets) and, coincidentally, by UDP (datagram sockets). It is the *port number*. It's a 16-bit number that's like the local address for the connection.

Think of the IP address as the street address of a hotel, and the port number as the room number. That's a decent analogy; maybe later I'll come up with one involving the automobile industry.

Say you want to have a computer that handles incoming mail AND web services how do you differentiate between the two on a computer with a single IP address

Well, different services on the Internet have different well-known port numbers. ou can see them all in the Big IANA Port List[12] or, if you re on a Unix box, in your */etc/services* file. HTTP the web is port 0, telnet is port 23, SMTP is port 25, the game DOOM[13] used port , etc. and so on. Ports under 1024 are often considered special, and usually re uire special OS privileges to use.

And that s about it

3.2. Byte Order

By Order of the Realm There shall be two byte orderings, hereafter to be known as Lame and Magnificent

I joke, but one really is better than the other. :-)

There really is no easy way to say this, so I ll just blurt it out: your computer might have been storing bytes in reverse order behind your back. I know No one wanted to have to tell you.

The thing is, everyone in the Internet world has generally agreed that if you want to represent the two-byte hex number, say b34f, you ll store it in two se uential bytes b3 followed by 4f. Makes sense, and, as Wilford Brimley[14] would tell you, it s the Right Thing To Do. This number, stored with the big end first, is called *Big-Endian*.

Unfortunately, a few computers scattered here and there throughout the world, namely anything with an Intel or Intel-compatible processor, store the bytes reversed, so b34f would be stored in memory as the se uential bytes 4f followed by b3. This storage method is called *Little-Endian*.

But wait, I m not done with terminology yet The more-sane *Big-Endian* is also called *Network Byte Order* because that s the order us network types like.

our computer stores numbers in *Host Byte Order*. If it s an Intel 0x , Host Byte Order is Little- ndian. If it s a Motorola k, Host Byte Order is Big- ndian. If it s a PowerPC, Host Byte Order is... well, it depends

A lot of times when you re building packets or filling out data structures you ll need to make sure your two- and four-byte numbers are in Network Byte Order. But how can you do this if you don t know the native Host Byte Order

Good news ou just get to assume the Host Byte Order isn t right, and you always run the value through a function to set it to Network Byte Order. The function will do the magic conversion if it has to, and this way your code is portable to machines of differing endianness.

All righty. There are two types of numbers that you can convert: short two bytes and long four bytes . These functions work for the unsigned variations as well. Say you want to convert a short from Host Byte Order to Network Byte Order. Start with "h" for "host", follow it with "to", then "n" for "network", and "s" for "short": h-to-n-s, or **htons()** read: "Host to Network Short" .

It s almost too easy...

ou can use every combination of "n", "h", "s", and "l" you want, not counting the really stupid ones. For example, there is NOT a **stolh()** "Short to Long Host" function not at this party, anyway. But there are:

htons()	**h**ost **to n**etwork **s**hort
htonl()	**h**ost **to n**etwork **l**ong
ntohs()	**n**etwork **to h**ost **s**hort
ntohl()	**n**etwork **to h**ost **l**ong

Basically, you ll want to convert the numbers to Network Byte Order before they go out on the wire, and convert them to Host Byte Order as they come in off the wire.

I don t know of a 4-bit variant, sorry. And if you want to do floating point, check out the section on Serialization, far below.

---

12. http://www.iana.org/assignments/port-numbers
13. http://en.wikipedia.org/wiki/Doom_(video_game)
14. http://en.wikipedia.org/wiki/Wilford_Brimley

Assume the numbers in this document are in Host Byte Order unless I say otherwise.

3.3. `structs`

Well, we re finally here. It s time to talk about programming. In this section, I ll cover various data types used by the sockets interface, since some of them are a real bear to figure out.

First the easy one: a socket descriptor. A socket descriptor is the following type:

```
int
```

Just a regular `int`.

Things get weird from here, so just read through and bear with me.

My First Struct™ `struct addrinfo`. This structure is a more recent invention, and is used to prep the socket address structures for subse uent use. It s also used in host name lookups, and service name lookups. That ll make more sense later when we get to actual usage, but just know for now that it s one of the first things you ll call when making a connection.

```
struct addrinfo {
    int              ai_flags;     // AI_PASSIVE, AI_CANONNAME, etc.
    int              ai_family;    // AF_INET, AF_INET6, AF_UNSPEC
    int              ai_socktype;  // SOCK_STREAM, SOCK_DGRAM
    int              ai_protocol;  // use 0 for "any"
    size_t           ai_addrlen;   // size of ai_addr in bytes
    struct sockaddr *ai_addr;      // struct sockaddr_in or _in6
    char            *ai_canonname; // full canonical hostname

    struct addrinfo *ai_next;      // linked list, next node
};
```

ou ll load this struct up a bit, and then call **`getaddrinfo()`**. It ll return a pointer to a new linked list of these structures filled out with all the goodies you need.

ou can force it to use IPv4 or IPv in the *`ai_family`* field, or leave it as `AF_UNSPEC` to use whatever. This is cool because your code can be IP version-agnostic.

Note that this is a linked list: *`ai_next`* points at the next element   there could be several results for you to choose from. I d use the first result that worked, but you might have different business needs I don t know everything, man

ou ll see that the *`ai_addr`* field in the `struct addrinfo` is a pointer to a `struct sockaddr`. This is where we start getting into the nitty-gritty details of what s inside an IP address structure.

ou might not usually need to write to these structures oftentimes, a call to **`getaddrinfo()`** to fill out your `struct addrinfo` for you is all you ll need.   ou *will*, however, have to peer inside these `structs` to get the values out, so I m presenting them here.

Also, all the code written before `struct addrinfo` was invented packed all this stuff by hand, so you ll see a lot of IPv4 code out in the wild that does exactly that.   ou know, in old versions of this guide and so on.

Some `structs` are IPv4, some are IPv , and some are both. I ll make notes of which are what.

Anyway, the `struct sockaddr` holds socket address information for many types of sockets.

```
struct sockaddr {
    unsigned short    sa_family;    // address family, AF_xxx
    char              sa_data[14];  // 14 bytes of protocol address
};
```

`sa_family` can be a variety of things, but it ll be `AF_INET` IPv4 or `AF_INET6` IPv   for everything we do in this document. *`sa_data`* contains a destination address and port number for the socket. This is rather unwieldy since you don t want to tediously pack the address in the *`sa_data`* by hand.

To deal with `struct sockaddr`, programmers created a parallel structure: `struct sockaddr_in` "in" for "Internet" to be used with IPv4.

And *this is the important* bit: a pointer to a `struct sockaddr_in` can be cast to a pointer to a `struct sockaddr` and vice-versa. So even though **`connect()`** wants a `struct sockaddr*`, you can still use a `struct sockaddr_in` and cast it at the last minute

```
// (IPv4 only--see struct sockaddr_in6 for IPv6)
```

```
struct sockaddr_in {
    short int          sin_family;  // Address family, AF_INET
    unsigned short int sin_port;    // Port number
    struct in_addr     sin_addr;    // Internet address
    unsigned char      sin_zero[8]; // Same size as struct sockaddr
};
```

This structure makes it easy to reference elements of the socket address. Note that *sin_zero* which is included to pad the structure to the length of a `struct sockaddr` should be set to all zeros with the function **memset()**. Also, notice that *sin_family* corresponds to *sa_family* in a `struct sockaddr` and should be set to "AF_INET". Finally, the *sin_port* must be in *Network Byte Order* by using **htons()**

Let s dig deeper   ou see the *sin_addr* field is a `struct in_addr`. What is that thing Well, not to be overly dramatic, but it s one of the scariest unions of all time:

```
// (IPv4 only--see struct in6_addr for IPv6)

// Internet address (a structure for historical reasons)
struct in_addr {
    uint32_t s_addr; // that's a 32-bit int (4 bytes)
};
```

Whoa Well, it *used* to be a union, but now those days seem to be gone. Good riddance. So if you have declared *ina* to be of type `struct sockaddr_in`, then *ina.sin_addr.s_addr* references the 4-byte IP address in Network Byte Order . Note that even if your system still uses the God-awful union for `struct in_addr`, you can still reference the 4-byte IP address in exactly the same way as I did above this due to #defines.

What about IPv   Similar `structs` exist for it, as well:

```
// (IPv6 only--see struct sockaddr_in and struct in_addr for IPv4)

struct sockaddr_in6 {
    u_int16_t       sin6_family;   // address family, AF_INET6
    u_int16_t       sin6_port;     // port number, Network Byte Order
    u_int32_t       sin6_flowinfo; // IPv6 flow information
    struct in6_addr sin6_addr;     // IPv6 address
    u_int32_t       sin6_scope_id; // Scope ID
};

struct in6_addr {
    unsigned char   s6_addr[16];   // IPv6 address
};
```

Note that IPv has an IPv address and a port number just like IPv4 has an IPv4 address and a port number.

Also note that I m not going to talk about the IPv flow information or Scope ID fields for the moment... this is just a starter guide. :-)

Last but not least, here is another simple structure, `struct sockaddr_storage` that is designed to be large enough to hold both IPv4 and IPv structures. See, for some calls, sometimes you don t know in advance if it s going to fill out your `struct sockaddr` with an IPv4 or IPv address. So you pass in this parallel structure, very similar to `struct sockaddr` except larger, and then cast it to the type you need:

```
struct sockaddr_storage {
    sa_family_t  ss_family;     // address family

    // all this is padding, implementation specific, ignore it:
    char      __ss_pad1[_SS_PAD1SIZE];
    int64_t   __ss_align;
    char      __ss_pad2[_SS_PAD2SIZE];
};
```

What s important is that you can see the address family in the `ss_family` field check this to see if it s `AF_INET` or `AF_INET6` for IPv4 or IPv . Then you can cast it to a `struct sockaddr_in` or `struct sockaddr_in6` if you wanna.

3.4. IP Addresses, Part Deux

Fortunately for you, there are a bunch of functions that allow you to manipulate IP addresses. No need to figure them out by hand and stuff them in a `long` with the `<<` operator.

First, let s say you have a `struct sockaddr_in ina`, and you have an IP address "10.12.110.57" or "2001:db8:63b3:1::3490" that you want to store into it. The function you want to use, **inet_pton()**, converts an IP address in numbers-and-dots notation into either a `struct in_addr` or a `struct in6_addr` depending on whether you specify `AF_INET`

3.4.1. Private (Or Disconnected) Networks

Lots of places have a firewall that hides the network from the rest of the world for their own protection. And often times, the firewall translates "internal" IP addresses to "external" that everyone else in the world knows IP addresses using a process called *Network Address Translation*, or NAT.

Are you getting nervous yet "Where s he going with all this weird stuff"

Well, relax and buy yourself a non-alcoholic or alcoholic drink, because as a beginner, you don t even have to worry about NAT, since it s done for you transparently. But I wanted to talk about the network behind the firewall in case you started getting confused by the network numbers you were seeing.

For instance, I have a firewall at home. I have two static IPv4 addresses allocated to me by the DSL company, and yet I have seven computers on the network. How is this possible Two computers can t share the same IP address, or else the data wouldn t know which one to go to

The answer is: they don t share the same IP addresses. They are on a private network with 24 million IP addresses allocated to it. They are all just for me. Well, all for me as far as anyone else is concerned. Here s what s happening:

If I log into a remote computer, it tells me I m logged in from 192.0.2.33 which is the public IP address my ISP has provided to me. But if I ask my local computer what it s IP address is, it says 10.0.0.5. Who is translating the IP address from one to the other That s right, the firewall It s doing NAT

10.*x.x.x* is one of a few reserved networks that are only to be used either on fully disconnected networks, or on networks that are behind firewalls. The details of which private network numbers are available for you to use are outlined in RFC 191 [15], but some common ones you ll see are 10.*x.x.x* and 192.1 .*x.x*, where *x* is 0-255, generally. Less common is 1 2.*y.x.x*, where *y* goes between 1 and 31.

Networks behind a NATing firewall don t *need* to be on one of these reserved networks, but they commonly are.

Fun fact My external IP address isn t really 192.0.2.33. The 192.0.2.*x* network is reserved for make-believe "real" IP addresses to be used in documentation, just like this guide Wowzers

IPv has private networks, too, in a sense. They ll start with `fdxx:` or maybe in the future `fcXX:`, as per RFC 4193[1]. NAT and IPv don t generally mix, however unless you re doing the IPv to IPv4 gateway thing which is beyond the scope of this document in theory you ll have so many addresses at your disposal that you won t need to use NAT any longer. But if you want to allocate addresses for yourself on a network that won t route outside, this is how to do it.

---

15. http://tools.ietf.org/html/rfc1918
1 . http://tools.ietf.org/html/rfc4193

4. Jumping from IPv4 to IPv6

But I just want to know what to change in my code to get it going with IPv   Tell me now
Ok   Ok

Almost everything in here is something I ve gone over, above, but it s the short version for the impatient. Of course, there is more than this, but this is what applies to the guide.

1. First of all, try to use **getaddrinfo()** to get all the `struct sockaddr` info, instead of packing the structures by hand. This will keep you IP version-agnostic, and will eliminate many of the subse uent steps.

2. Any place that you find you re hard-coding anything related to the IP version, try to wrap up in a helper function.

3. Change `AF_INET` to `AF_INET6`.

4. Change `PF_INET` to `PF_INET6`.

5. Change `INADDR_ANY` assignments to `in6addr_any` assignments, which are slightly different:

    ```
    struct sockaddr_in sa;
    struct sockaddr_in6 sa6;

    sa.sin_addr.s_addr = INADDR_ANY;  // use my IPv4 address
    sa6.sin6_addr = in6addr_any; // use my IPv6 address
    ```

    Also, the value `IN6ADDR_ANY_INIT` can be used as an initializer when the `struct in6_addr` is declared, like so:

    ```
    struct in6_addr ia6 = IN6ADDR_ANY_INIT;
    ```

    . Instead of `struct sockaddr_in` use `struct sockaddr_in6`, being sure to add " " to the fields as appropriate se structs, above . There is no *sin6_zero* field.

    . Instead of `struct in_addr` use `struct in6_addr`, being sure to add " " to the fields as appropriate see struc s, a ove .

    . Instead of **inet_aton()** or **inet_addr()**, use **inet_pton()**.

9. Instead of **inet_ntoa()**, use **inet_ntop()**.

10. Instead of **gethostbyname()**, use the superior **getaddrinfo()**.

11. Instead of **gethostbyaddr()**, use the superior **getnameinfo()** although **gethostbyaddr()** can still work with IPv .

12. `INADDR_BROADCAST` no longer works. Use IPv   multicast instead.

Et voila

5. System Calls or Bust

This is the section where we get into the system calls and other library calls that allow you to access the network functionality of a Unix box, or any box that supports the sockets API for that matter BSD, Windows, Linux, Mac, what-have-you. When you call one of these functions, the kernel takes over and does all the work for you automagically.

The place most people get stuck around here is what order to call these things in. In that, the **man** pages are no use, as you ve probably discovered. Well, to help with that dreadful situation, I ve tried to lay out the system calls in the following sections in *exactly* approximately the same order that you ll need to call them in your programs.

That, coupled with a few pieces of sample code here and there, some milk and cookies which I fear you will have to supply yourself , and some raw guts and courage, and you ll be beaming data around the Internet like the Son of Jon Postel

*(Please note that for brevity, many code snippets below do not include necessary error checking. And they very commonly assume that the result from calls to **getaddrinfo()** succeed and return a valid entry in the linked list. Both of these situations are properly addressed in the stand-alone programs, though, so use those as a model.)*

5.1. getaddrinfo()—Prepare to launch!

This is a real workhorse of a function with a lot of options, but usage is actually pretty simple. It helps set up the `structs` you need later on.

A tiny bit of history: it used to be that you would use a function called **gethostbyname()** to do DNS lookups. Then you d load that information by hand into a `struct sockaddr_in`, and use that in your calls.

This is no longer necessary, thankfully. Nor is it desirable, if you want to write code that works for both IPv4 and IPv In these modern times, you now have the function **getaddrinfo()** that does all kinds of good stuff for you, including DNS and service name lookups, and fills out the `structs` you need, besides

Let s take a look

```
#include <sys/types.h>
#include <sys/socket.h>
#include <netdb.h>

int getaddrinfo(const char *node,     // e.g. "www.example.com" or IP
                const char *service,  // e.g. "http" or port number
                const struct addrinfo *hints,
                struct addrinfo **res);
```

ou give this function three input parameters, and it gives you a pointer to a linked-list, *res*, of results.

The *node* parameter is the host name to connect to, or an IP address.

Next is the parameter *service*, which can be a port number, like " 0", or the name of a particular service found in The IANA Port List[1] or the */etc/services* file on your Unix machine like "http" or "ftp" or "telnet" or "smtp" or whatever.

Finally, the *hints* parameter points to a `struct addrinfo` that you ve already filled out with relevant information.

Here s a sample call if you re a server who wants to listen on your host s IP address, port 3490. Note that this doesn t actually do any listening or network setup it merely sets up structures we ll use later:

```
int status;
struct addrinfo hints;
struct addrinfo *servinfo;  // will point to the results

memset(&hints, 0, sizeof hints); // make sure the struct is empty
hints.ai_family = AF_UNSPEC;     // don't care IPv4 or IPv6
```

---

1 .http://www.iana.org/assignments/port-numbers

```
hints.ai_socktype = SOCK_STREAM; // TCP stream sockets
hints.ai_flags = AI_PASSIVE;     // fill in my IP for me

if ((status = getaddrinfo(NULL, "3490", &hints, &servinfo)) != 0) {
    fprintf(stderr, "getaddrinfo error: %s\n", gai_strerror(status));
    exit(1);
}

// servinfo now points to a linked list of 1 or more struct addrinfos

// ... do everything until you don't need servinfo anymore ....

freeaddrinfo(servinfo); // free the linked-list
```

Notice that I set the *ai_family* to AF_UNSPEC, thereby saying that I don t care if we use IPv4 or IPv . ou can set it to AF_INET or AF_INET6 if you want one or the other specifically.

Also, you ll see the AI_PASSIVE flag in there this tells **getaddrinfo()** to assign the address of my local host to the socket structures. This is nice because then you don t have to hardcode it. Or you can put a specific address in as the first parameter to **getaddrinfo()** where I currently have NULL, up there.

Then we make the call. If there s an error **getaddrinfo()** returns non-zero , we can print it out using the function **gai_strerror()**, as you see. If everything works properly, though, *servinfo* will point to a linked list of struct addrinfos, each of which contains a struct sockaddr of some kind that we can use later Nifty

Finally, when we re eventually all done with the linked list that **getaddrinfo()** so graciously allocated for us, we can and should free it all up with a call to **freeaddrinfo()**.

Here s a sample call if you re a client who wants to connect to a particular server, say "www.example.net" port 3490. Again, this doesn t actually connect, but it sets up the structures we ll use later:

```
int status;
struct addrinfo hints;
struct addrinfo *servinfo;  // will point to the results

memset(&hints, 0, sizeof hints); // make sure the struct is empty
hints.ai_family = AF_UNSPEC;     // don't care IPv4 or IPv6
hints.ai_socktype = SOCK_STREAM; // TCP stream sockets

// get ready to connect
status = getaddrinfo("www.example.net", "3490", &hints, &servinfo);

// servinfo now points to a linked list of 1 or more struct addrinfos

// etc.
```

I keep saying that *servinfo* is a linked list with all kinds of address information. Let s write a uick demo program to show off this information. This short program[1] will print the IP addresses for whatever host you specify on the command line:

```
/*
** showip.c -- show IP addresses for a host given on the command line
*/

#include <stdio.h>
#include <string.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netdb.h>
#include <arpa/inet.h>

int main(int argc, char *argv[])
{
```

---

1 .http://beej.us/guide/bgnet/examples/showip.c

```
    struct addrinfo hints, *res, *p;
    int status;
    char ipstr[INET6_ADDRSTRLEN];

    if (argc != 2) {
        fprintf(stderr,"usage: showip hostname\n");
        return 1;
    }

    memset(&hints, 0, sizeof hints);
    hints.ai_family = AF_UNSPEC; // AF_INET or AF_INET6 to force version
    hints.ai_socktype = SOCK_STREAM;

    if ((status = getaddrinfo(argv[1], NULL, &hints, &res)) != 0) {
        fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(status));
        return 2;
    }

    printf("IP addresses for %s:\n\n", argv[1]);

    for(p = res;p != NULL; p = p->ai_next) {
        void *addr;
        char *ipver;

        // get the pointer to the address itself,
        // different fields in IPv4 and IPv6:
        if (p->ai_family == AF_INET) { // IPv4
            struct sockaddr_in *ipv4 = (struct sockaddr_in *)p->ai_addr;
            addr = &(ipv4->sin_addr);
            ipver = "IPv4";
        } else { // IPv6
            struct sockaddr_in6 *ipv6 = (struct sockaddr_in6 *)p->ai_addr;
            addr = &(ipv6->sin6_addr);
            ipver = "IPv6";
        }

        // convert the IP to a string and print it:
        inet_ntop(p->ai_family, addr, ipstr, sizeof ipstr);
        printf("  %s: %s□   ipO}
```

5.2. `socket()`—Get the File Descriptor!

I guess I can put it off no longer I have to talk about the **socket()** system call. Here s the breakdown:

```
#include <sys/types.h>
#include <sys/socket.h>

int socket(int domain, int type, int protocol);
```

But what are these arguments They allow you to say what kind of socket you want IPv4 or IPv , stream or datagram, and TCP or UDP .

It used to be people would hardcode these values, and you can absolutely still do that. *domain* is PF_INET or PF_INET6, *type* is SOCK_STREAM or SOCK_DGRAM, and *protocol* can be set to 0 to choose the proper protocol for the given type. Or you can call **getprotobyname()** to look up the protocol you want, "tcp" or "udp".

This PF_INET thing is a close relative of the AF_INET that you can use when initializing the *sin_family* field in your struct sockaddr_in. In fact, they re so closely related that they actually have the same value, and many programmers will call **socket()** and pass AF_INET as the first argument instead of **PF_INET**. Now, get some milk and cookies, because it s times for a story. Once upon a time, a long time ago, it was thought that maybe a address family what the "AF" in "AF_INET" stands for might support several protocols that were referred to by their protocol family what the "PF" in "PF_INET" stands for . That didn t happen. And they all lived happily ever after, The nd. So the most correct thing to do is to use AF_INET in your struct sockaddr_in and PF_INET in your call to **socket()**.

Anyway, enough of that. What you really want to do is use the values from the results of the call to **getaddrinfo()**, and feed them into **socket()** directly like this:

```
int s;
struct addrinfo hints, *res;

// do the lookup
// [pretend we already filled out the "hints" struct]
getaddrinfo("www.example.com", "http", &hints, &res);

// [again, you should do error-checking on getaddrinfo(), and walk
// the "res" linked list looking for valid entries instead of just
// assuming the first one is good (like many of these examples do.)
// See the section on client/server for real examples.]

s = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
```

socket() simply returns to you a *socket descriptor* that you can use in later system calls, or -1 on error. The global variable *errno* is set to the error s va ue see the *errno* man page for more details, and a uick note on using *errno* in multithreaded program .

Fine, fine, fine, but what good is this socket The nswer is that it s really no good by itself, and you need to read on and make more system calls for it to m ke any sense.

5.3. `bind()`—What port am I on?

Once you have a socket, you might have to associate that socket with a port on your local machine. This is commonly done if you re going to **listen()** for incoming connections on a specific port multiplayer network games do this when they tell you to "connect to 192.1 .5.10 port 3490". The port number is used by the kernel to match an incoming packet to a certain process s socket descriptor. If you re going to only be doing a **connect()** because you re the client, not the server , this is probably be unnecessary. Read it anyway, just for kicks.

Here is the synopsis for the **bind()** system call:

```
#include <sys/types.h>
#include <sys/socket.h>

int bind(int sockfd, struct sockaddr *my_addr, int addrlen);
```

    sockfd is the socket file descriptor returned by **socket()**. *my_addr* is a pointer to a struct sockaddr that contains information about your address, namely, port and IP address. *addrlen* is the length in bytes of that address.

    Whew. That s a bit to absorb in one chunk. Let s have an example that binds the socket to the host the program is running on, port 3490:

```
struct addrinfo hints, *res;
int sockfd;

// first, load up address structs with getaddrinfo():

memset(&hints, 0, sizeof hints);
hints.ai_family = AF_UNSPEC;  // use IPv4 or IPv6, whichever
hints.ai_socktype = SOCK_STREAM;
hints.ai_flags = AI_PASSIVE;     // fill in my IP for me

getaddrinfo(NULL, "3490", &hints, &res);

// make a socket:

sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);

// bind it to the port we passed in to getaddrinfo():

bind(sockfd, res->ai_addr, res->ai_addrlen);
```

    By using the AI_PASSIVE flag, I m telling the program to bind to the IP of the host it s running on. If you want to bind to a specific local IP address, drop the AI_PASSIVE and put an IP address in for the first argument to **getaddrinfo()**.

    bind() also returns -1 on error and sets *errno* to the error s value.

    Lots of old code manually packs the struct sockaddr_in before calling **bind()**. Obviously this is IPv4-specific, but there s really nothing stopping you from doing the same thing with IPv , except that using **getaddrinfo()** is going to be easier, generally. Anyway, the old code looks something like this:

```
// !!! THIS IS THE OLD WAY !!!

int sockfd;
struct sockaddr_in my_addr;

sockfd = socket(PF_INET, SOCK_STREAM, 0);

my_addr.sin_family = AF_INET;
my_addr.sin_port = htons(MYPORT);     // short, network byte order
my_addr.sin_addr.s_addr = inet_addr("10.12.110.57");
memset(my_addr.sin_zero, '\0', sizeof my_addr.sin_zero);

bind(sockfd, (struct sockaddr *)&my_addr, sizeof my_addr);
```

    In the above code, you could also assign INADDR_ANY to the *s_addr* field if you wanted to bind to your local IP address like the AI_PASSIVE flag, above. The IPv version of INADDR_ANY is a global variable *in6addr_any* that is assigned into the *sin6_addr* field of your struct sockaddr_in6. There is also a macro IN6ADDR_ANY_INIT that you can use in a variable initializer.

    Another thing to watch out for when calling **bind()**: don t go underboard with your port numbers. All ports below 1024 are R S R D unless you re the superuser   ou can have any port number above that, right up to 5535 provided they aren t already being used by another program.

    Sometimes, you might notice, you try to rerun a server and **bind()** fails, claiming "Address already in use." What does that mean   Well, a little bit of a socket that was connected is still hanging around in the kernel, and it s hogging the port.   ou can either wait for it to clear a minute or so , or add code to your program allowing it to reuse the port, like this:

```
int yes=1;
//char yes='1'; // Solaris people use this

// lose the pesky "Address already in use" error message
```

```
if (setsockopt(listener,SOL_SOCKET,SO_REUSEADDR,&yes,sizeof(int)) == -1) {
    perror("setsockopt");
    exit(1);
}
```

One small extra final note about **bind()**: there are times when you won't absolutely have to call it. If you are **connect()**ing to a remote machine and you don't care what your local port is as is the case with **telnet** where you only care about the remote port , you can simply call **connect()**, it ll check to see if the socket is unbound, and will **bind()** it to an unused local port if necessary.

5.4. connect()—Hey, you!

Let s just pretend for a few minutes that you re a telnet application. our user commands you just like in the movie *TRON* to get a socket file descriptor. ou comply and call **socket()**. Next, the user tells you to connect to "10.12.110.57" on port "23" the standard telnet port. ow What do you do now

Lucky for you, program, you re now perusing the section on **connect()** how to connect to a remote host. So read furiously onward No time to lose

The **connect()** call is as follows:

```
#include <sys/types.h>
#include <sys/socket.h>

int connect(int sockfd, struct sockaddr *serv_addr, int addrlen);
```

sockfd is our friendly neighborhood socket file descriptor, as returned by the **socket()** call, *serv_addr* is a struct sockaddr containing the destination port and IP address, and *addrlen* is the length in bytes of the server address structure.

All of this information can be gleaned from the results of the **getaddrinfo()** call, which rocks.

Is this starting to make more sense I can t hear you from here, so I ll just have to hope that it is. Let s have an example where we make a socket connection to "www.example.com", port 3490:

```
struct addrinfo hints, *res;
int sockfd;

// first, load up address structs with getaddrinfo():

memset(&hints, 0, sizeof hints);
hints.ai_family = AF_UNSPEC;
hints.ai_socktype = SOCK_STREAM;

getaddrinfo("www.example.com", "3490", &hints, &res);

// make a socket:

sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);

// connect!

connect(sockfd, res->ai_addr, res->ai_addrlen);
```

Again, old-school programs filled out their own struct sockaddr_ins to pass to **connect()**. ou can do that if you want to. See the similar note in the **bind()** section, above.

Be sure to check the return value from **connect()** it ll return -1 on error and set the variable *errno*.

Also, notice that we didn t call **bind()**. Basically, we don t care about our local port number we only care where we re going the remote port . The kernel will choose a local port for us, and the site we connect to will automatically get this information from us. No worries.

5.5. listen()—Will somebody please call me?

Ok, time for a change of pace. What if you don t want to connect to a remote host. Say, just for kicks, that you want to wait for incoming connections and handle them in some way. The process is two step: first you **listen()**, then you **accept()** see below.

The listen call is fairly simple, but re uires a bit of explanation:

```
int listen(int sockfd, int backlog);
```

sockfd is the usual socket file descriptor from the **socket()** system call. *backlog* is the number of connections allowed on the incoming ueue. What does that mean Well, incoming connections are going to wait in this ueue until you **accept()** them see below and this is the limit on how many can ueue up. Most systems silently limit this number to about 20 you can probably get away with setting it to 5 or 10.

Again, as per usual, **listen()** returns -1 and sets *errno* on error.

Well, as you can probably imagine, we need to call **bind()** before we call **listen()** so that the server is running on a specific port. ou have to be able to tell your buddies which port to connect to So if you re going to be listening for incoming connections, the se uence of system calls you ll make is:

```
getaddrinfo();
socket();
bind();
listen();
/* accept() goes here */
```

I ll just leave that in the place of sample code, since it s fairly self-explanatory. The code in the **accept()** section, below, is more complete. The really tricky part of this whole sha-bang is the call to **accept()**.

5.6. accept()—"Thank you for calling port 3490."

Get ready the **accept()** call is kinda weird What s going to happen is this: someone far far away will try to **connect()** to your machine on a port that you are **listen()**ing on. Their connection will be ueued up waiting to be **accept()**ed. ou call **accept()** and you tell it to get the pending connection. It ll return to you a *brand new socket file descriptor* to use for this single connection That s right, suddenly you have *two socket file descriptors* for the price of one The original one is still listening for more new connections, and the newly created one is finally ready to **send()** and **recv()**. We re there

The call is as follows:

```
#include <sys/types.h>
#include <sys/socket.h>

int accept(int sockfd, struct sockaddr *addr, socklen_t *addrlen);
```

sockfd is the **listen()**ing socket descriptor. asy enough. *addr* will usually be a pointer to a local struct sockaddr_storage. This is where the information about the incoming connection will go and with it you can determine which host is calling you from which port . *addrlen* is a local integer variable that should be set to sizeof(struct sockaddr_storage) before its address is passed to **accept()**. **accept()** will not put more than that many bytes into *addr*. If it puts fewer in, it ll change the value of *addrlen* to reflect that.

Guess what **accept()** returns -1 and sets *errno* if an error occurs. Betcha didn t figure that.

Like before, this is a bunch to absorb in one chunk, so here s a sample code fragment for your perusal:

```
#include <string.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>

#define MYPORT "3490"  // the port users will be connecting to
#define BACKLOG 10     // how many pending connections queue will hold

int main(void)
{
    struct sockaddr_storage their_addr;
    socklen_t addr_size;
    struct addrinfo hints, *res;
    int sockfd, new_fd;

    // !! don't forget your error checking for these calls !!
```

```
    // first, load up address structs with getaddrinfo():

    memset(&hints, 0, sizeof hints);
    hints.ai_family = AF_UNSPEC;   // use IPv4 or IPv6, whichever
    hints.ai_socktype = SOCK_STREAM;
    hints.ai_flags = AI_PASSIVE;      // fill in my IP for me

    getaddrinfo(NULL, MYPORT, &hints, &res);

    // make a socket, bind it, and listen on it:

    sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
    bind(sockfd, res->ai_addr, res->ai_addrlen);
    listen(sockfd, BACKLOG);

    // now accept an incoming connection:

    addr_size = sizeof their_addr;
    new_fd = accept(sockfd, (struct sockaddr *)&their_addr, &addr_size);

    // ready to communicate on socket descriptor new_fd!
    .
    .
    .
```

Again, note that we will use the socket descriptor *new_fd* for all **send()** and **recv()** calls. If you re only getting one single connection ever, you can **close()** the listening *sockfd* in order to prevent more incoming connections on the same port, if you so desire.

5.7. **send()** and **recv()**—Talk to me, baby!

These two functions are for communicating over stream sockets or connected datagram sockets. If you want to use regular unconnected datagram sockets, you ll need to see the section on **sendto()** and **recvfrom()**, below.

The **send()** call:

```
int send(int sockfd, const void *msg, int len, int flags);
```

sockfd is the socket descriptor you want to send data to whether it s the one returned by **socket()** or the one you got with **accept()**. *msg* is a pointer to the data you want to send, and *len* is the length of that data in bytes. Just set *flags* to 0. See the **send()** man page for more information concerning flags.

Some sample code might be:

```
char *msg = "Beej was here!";
int len, bytes_sent;
.
.
.
len = strlen(msg);
bytes_sent = send(sockfd, msg, len, 0);
.
.
.
```

send() returns the number of bytes actually sent out *this might be less than the number you told it to send!* See, sometimes you tell it to send a whole gob of data and it just can t handle it. It ll fire off as much of the data as it can, and trust you to send the rest later. Remember, if the value returned by **send()** doesn t match the value in *len*, it s up to you to send the rest of the string. The good news is this: if the packet is small less than 1K or so it will *probably* manage to send the whole thing all in one go. Again, -1 is returned on error, and *errno* is set to the error number.

The **recv()** call is similar in many respects:

```
int recv(int sockfd, void *buf, int len, int flags);
```

sockfd is the socket descriptor to read from, *buf* is the buffer to read the information into, *len* is the maximum length of the buffer, and *flags* can again be set to 0. See the **recv()** man page for flag information.

recv() returns the number of bytes actually read into the buffer, or -1 on error with *errno* set, accordingly.

Wait **recv()** can return 0. This can mean only one thing: the remote side has closed the connection on you A return value of 0 is **recv()** s way of letting you know this has occurred.

There, that was easy, wasn t it ou can now pass data back and forth on stream sockets Whee ou re a Unix Network Programmer

5.8. `sendto()` and `recvfrom()`—Talk to me, DGRAM-style

"This is all fine and dandy," I hear you saying, "but where does this leave me with unconnected datagram sockets " No problemo, amigo. We have just the thing.

Since datagram sockets aren t connected to a remote host, guess which piece of information we need to give before we send a packet That s right The destination address Here s the scoop:

```
int sendto(int sockfd, const void *msg, int len, unsigned int flags,
           const struct sockaddr *to, socklen_t tolen);
```

As you can see, this call is basically the same as the call to **send()** with the addition of two other pieces of information. *to* is a pointer to a `struct sockaddr` which will probably be another `struct sockaddr_in` or `struct sockaddr_in6` or `struct sockaddr_storage` that you cast at the last minute which contains the destination IP address and port. *tolen*, an `int` deep-down, can simply be set to `sizeof *to` or `sizeof(struct sockaddr_storage)`.

To get your hands on the destination address structure, you ll probably either get it from **getaddrinfo()**, or from **recvfrom()**, below, or you ll fill it out by hand.

Just like with **send()**, **sendto()** returns the number of bytes actually sent which, again, might be less than the number of bytes you told it to send , or -1 on error.

ually similar are **recv()** and **recvfrom()**. The synopsis of **recvfrom()** is:

```
int recvfrom(int sockfd, void *buf, int len, unsigned int flags,
             struct sockaddr *from, int *fromlen);
```

Again, this is just like **recv()** with the addition of a couple fields. *from* is a pointer to a local `struct sockaddr_storage` that will be filled with the IP address and port of the originating machine. *fromlen* is a pointer to a local `int` that should be initialized to `sizeof *from` or `sizeof(struct sockaddr_storage)`. When the function returns, *fromlen* will contain the length of the address actually stored in *from*.

recvfrom() returns the number of bytes received, or -1 on error with *errno* set accordingly.

So, here s a uestion: why do we use `struct sockaddr_storage` as the socket type Why not `struct sockaddr_in` Because, you see, we want to not tie ourselves down to IPv4 or IPv . So we use the generic `struct sockaddr_storage` which we know will be big enough for either.

So... here s another uestion: why isn t `struct sockaddr` itself big enough for any address We even cast the general-purpose `struct sockaddr_storage` to the general-purpose `struct sockaddr` Seems extraneous and redundant, huh. The answer is, it just isn t big enough, and I d guess that changing it at this point would be Problematic. So they made a new one.

Remember, if you **connect()** a datagram socket, you can then simply use **send()** and **recv()** for all your transactions. The socket itself is still a datagram socket and the packets still use UDP, but the socket interface will automatically add the destination and source information for you.

5.9. `close()` and `shutdown()`—Get outta my face!

Whew ou ve been **send()**ing and **recv()**ing data all day long, and you ve had it. ou re ready to close the connection on your socket descriptor. This is easy. ou can just use the regular Unix file descriptor **close()** function:

```
close(sockfd);
```

This will prevent any more reads and writes to the socket. Anyone attempting to read or write the socket on the remote end will receive an error.

Just in case you want a little more control over how the socket closes, you can use the **shutdown()** function. It allows you to cut off communication in a certain direction, or both ways just like **close()** does. Synopsis:

```
int shutdown(int sockfd, int how);
```

sockfd is the socket file descriptor you want to shutdown, and *how* is one of the following:

0	Further receives are disallowed
1	Further sends are disallowed
2	Further sends and receives are disallowed like **close()**

shutdown() returns 0 on success, and -1 on error with *errno* set accordingly.

If you deign to use **shutdown()** on unconnected datagram sockets, it will simply make the socket unavailable for further **send()** and **recv()** calls remember that you can use these if you **connect()** your datagram socket.

It s important to note that **shutdown()** doesn t actually close the file descriptor it just changes its usability. To free a socket descriptor, you need to use **close()**.

Nothing to it.

xcept to remember that if you re using Windows and Winsock that you should call **closesocket()** instead of **close()**.

5.10. `getpeername()`—Who are you?

This function is so easy.

It s so easy, I almost didn t give it its own section. But here it is anyway.

The function **getpeername()** will tell you who is at the other end of a connected stream socket. The synopsis:

```
#include <sys/socket.h>

int getpeername(int sockfd, struct sockaddr *addr, int *addrlen);
```

sockfd is the descriptor of the connected stream socket, *addr* is a pointer to a `struct sockaddr` or a `struct sockaddr_in` that will hold the information about the other side of the connection, and *addrlen* is a pointer to an `int`, that should be initialized to `sizeof *addr` or `sizeof(struct sockaddr)`.

The function returns -1 on error and sets *errno* accordingly.

Once you have their address, you can use **inet_ntop()**, **getnameinfo()**, or **gethostbyaddr()** to print or get more information. No, you can t get their login name. Ok, ok. If the other computer is running an ident daemon, this is possible. This, however, is beyond the scope of this document. Check out RFC 1413[19] for more info.

5.11. `gethostname()`—Who am I?

ven easier than **getpeername()** is the function **gethostname()**. It returns the name of the computer that your program is running on. The name can then be used by **gethostbyname()**, below, to determine the IP address of your local machine.

What could be more fun I could think of a few things, but they don t pertain to socket programming. Anyway, here s the breakdown:

```
#include <unistd.h>

int gethostname(char *hostname, size_t size);
```

The arguments are simple: *hostname* is a pointer to an array of chars that will contain the hostname upon the function s return, and *size* is the length in bytes of the *hostname* array.

The function returns 0 on successful completion, and -1 on error, setting *errno* as usual.

---

19. `http://tools.ietf.org/html/rfc1413`

6. Client-Server Background

It s a client-server world, baby. Just about everything on the network deals with client processes talking to server processes and vice-versa. Take **telnet**, for instance. When you connect to a remote host on port 23 with telnet the client , a program on that host called **telnetd**, the server springs to life. It handles the incoming telnet connection, sets you up with a login prompt, etc.
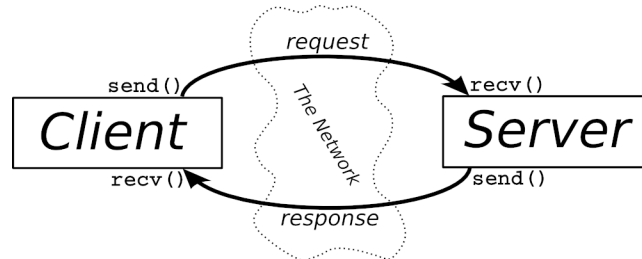
Client-Server Interaction.

The exchange of information between client and server is summarized in the above diagram.

Note that the client-server pair can speak SOCK_STREAM, SOCK_DGRAM, or anything else as long as they re speaking the same thing. Some good examples of client-server pairs are **telnet**/**telnetd**, **ftp**/**ftpd**, or **Firefox**/**Apache**.   very time you use **ftp**, there s a remote program, **ftpd**, that serves you.

Often, there will only be one server on a machine, and that server will handle multiple clients using **fork()**. The basic routine is: server will wait for a connection, **accept()** it, and **fork()** a child process to handle it. This is what our sample server does in the next section.

6.1. A Simple Stream Server

All this server does is send the string "Hello, World!\n" out over a stream connection. All you need to do to test this server is run it in one window, and telnet to it from another with:

```
$ telnet remotehostname 3490
```

where remotehostname is the name of the machine you re running it on.

The server code[20]:

```
/*
** server.c -- a stream socket server demo
*/

#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
#include <errno.h>
#include <string.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <netdb.h>
#include <arpa/inet.h>
#include <sys/wait.h>
#include <signal.h>

#define PORT "3490"  // the port users will be connecting to

#define BACKLOG 10   // how many pending connections queue will hold

void sigchld_handler(int s)
{
    while(waitpid(-1, NULL, WNOHANG) > 0);
}
```

---

20. http://beej.us/guide/bgnet/examples/server.c

```
// get sockaddr, IPv4 or IPv6:
void *get_in_addr(struct sockaddr *sa)
{
    if (sa->sa_family == AF_INET) {
        return &(((struct sockaddr_in*)sa)->sin_addr);
    }

    return &(((struct sockaddr_in6*)sa)->sin6_addr);
}

int main(void)
{
    int sockfd, new_fd;  // listen on sock_fd, new connection on new_fd
    struct addrinfo hints, *servinfo, *p;
    struct sockaddr_storage their_addr; // connector's address information
    socklen_t sin_size;
    struct sigaction sa;
    int yes=1;
    char s[INET6_ADDRSTRLEN];
    int rv;

    memset(&hints, 0, sizeof hints);
    hints.ai_family = AF_UNSPEC;
    hints.ai_socktype = SOCK_STREAM;
    hints.ai_flags = AI_PASSIVE; // use my IP

    if ((rv = getaddrinfo(NULL, PORT, &hints, &servinfo)) != 0) {
        fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(rv));
        return 1;
    }

    // loop through all the results and bind to the first we can
    for(p = servinfo; p != NULL; p = p->ai_next) {
        if ((sockfd = socket(p->ai_family, p->ai_socktype,
                p->ai_protocol)) == -1) {
            perror("server: socket");
            continue;
        }

        if (setsockopt(sockfd, SOL_SOCKET, SO_REUSEADDR, &yes,
                sizeof(int)) == -1) {
            perror("setsockopt");
            exit(1);
        }

        if (bind(sockfd, p->ai_addr, p->ai_addrlen) == -1) {
            close(sockfd);
            perror("server: bind");
            continue;
        }

        break;
    }

    if (p == NULL)  {
        fprintf(stderr, "server: failed to bind\n");
        return 2;
    }

    freeaddrinfo(servinfo); // all done with this structure

    if (listen(sockfd, BACKLOG) == -1) {
        perror("listen");
        exit(1);
    }
```

```
    sa.sa_handler = sigchld_handler; // reap all dead processes
    sigemptyset(&sa.sa_mask);
    sa.sa_flags = SA_RESTART;
    if (sigaction(SIGCHLD, &sa, NULL) == -1) {
        perror("sigaction");
        exit(1);
    }

    printf("server: waiting for connections...\n");

    while(1) {  // main accept() loop
        sin_size = sizeof their_addr;
        new_fd = accept(sockfd, (struct sockaddr *)&their_addr, &sin_size);
        if (new_fd == -1) {
            perror("accept");
            continue;
        }

        inet_ntop(their_addr.ss_family,
            get_in_addr((struct sockaddr *)&their_addr),
            s, sizeof s);
        printf("server: got connection from %s\n", s);

        if (!fork()) { // this is the child process
            close(sockfd); // child doesn't need the listener
            if (send(new_fd, "Hello, world!", 13, 0) == -1)
                perror("send");
            close(new_fd);
            exit(0);
        }
        close(new_fd);  // parent doesn't need this
    }

    return 0;
}
```

In case you re curious, I have the code in one big **main()** function for I feel syntactic clarity. Feel free to split it into smaller functions if it makes you feel better.

Also, this whole **sigaction()** thing might be new to you   that s ok. The code that s there is responsible for reaping zombie processes that appear as the **fork()**ed child processes exit. If you make lots of zombies and don t reap them, your system administrator will become agitated.

 ou can get the data from this server by using the client listed in the next section.

6.2. A Simple Stream Client

This guy s even easier than the server. All this client does is connect to the host you specify on the command line, port 3490. It gets the string that the server sends.

The client source[21]:

```
/*
** client.c -- a stream socket client demo
*/

#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
#include <errno.h>
#include <string.h>
#include <netdb.h>
#include <sys/types.h>
#include <netinet/in.h>
#include <sys/socket.h>

#include <arpa/inet.h>
```

---

21. http://beej.us/guide/bgnet/examples/client.c

```
#define PORT "3490" // the port client will be connecting to

#define MAXDATASIZE 100 // max number of bytes we can get at once

// get sockaddr, IPv4 or IPv6:
void *get_in_addr(struct sockaddr *sa)
{
    if (sa->sa_family == AF_INET) {
        return &(((struct sockaddr_in*)sa)->sin_addr);
    }

    return &(((struct sockaddr_in6*)sa)->sin6_addr);
}

int main(int argc, char *argv[])
{
    int sockfd, numbytes;
    char buf[MAXDATASIZE];
    struct addrinfo hints, *servinfo, *p;
    int rv;
    char s[INET6_ADDRSTRLEN];

    if (argc != 2) {
        fprintf(stderr,"usage: client hostname\n");
        exit(1);
    }

    memset(&hints, 0, sizeof hints);
    hints.ai_family = AF_UNSPEC;
    hints.ai_socktype = SOCK_STREAM;

    if ((rv = getaddrinfo(argv[1], PORT, &hints, &servinfo)) != 0) {
        fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(rv));
        return 1;
    }

    // loop through all the results and connect to the first we can
    for(p = servinfo; p != NULL; p = p->ai_next) {
        if ((sockfd = socket(p->ai_family, p->ai_socktype,
                p->ai_protocol)) == -1) {
            perror("client: socket");
            continue;
        }

        if (connect(sockfd, p->ai_addr, p->ai_addrlen) == -1) {
            close(sockfd);
            perror("client: connect");
            continue;
        }

        break;
    }

    if (p == NULL) {
        fprintf(stderr, "client: failed to connect\n");
        return 2;
    }

    inet_ntop(p->ai_family, get_in_addr((struct sockaddr *)p->ai_addr),
            s, sizeof s);
    printf("client: connecting to %s\n", s);

    freeaddrinfo(servinfo); // all done with this structure

    if ((numbytes = recv(sockfd, buf, MAXDATASIZE-1, 0)) == -1) {
        perror("recv");
```

```
        exit(1);
    }

    buf[numbytes] = '\0';

    printf("client: received '%s'\n",buf);

    close(sockfd);

    return 0;
}
```

Notice that if you don t run the server before you run the client, **connect()** returns "Connection refused". ery useful.

6.3. Datagram Sockets

We ve already covered the basics of UDP datagram sockets with our discussion of **sendto()** and **recvfrom()**, above, so I ll just present a couple of sample programs: *talker.c* and *listener.c*.

listener sits on a machine waiting for an incoming packet on port 4950. **talker** sends a packet to that port, on the specified machine, that contains whatever the user enters on the command line.

Here is the source for *listener.c*[22]:

```
/*
** listener.c -- a datagram sockets "server" demo
*/

#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
#include <errno.h>
#include <string.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <arpa/inet.h>
#include <netdb.h>

#define MYPORT "4950"    // the port users will be connecting to

#define MAXBUFLEN 100

// get sockaddr, IPv4 or IPv6:
void *get_in_addr(struct sockaddr *sa)
{
    if (sa->sa_family == AF_INET) {
        return &(((struct sockaddr_in*)sa)->sin_addr);
    }

    return &(((struct sockaddr_in6*)sa)->sin6_addr);
}

int main(void)
{
    int sockfd;
    struct addrinfo hints, *servinfo, *p;
    int rv;
    int numbytes;
    struct sockaddr_storage their_addr;
    char buf[MAXBUFLEN];
    socklen_t addr_len;
    char s[INET6_ADDRSTRLEN];

    memset(&hints, 0, sizeof hints);
    hints.ai_family = AF_UNSPEC; // set to AF_INET to force IPv4
```

---

22. `http://beej.us/guide/bgnet/examples/listener.c`

```
    hints.ai_socktype = SOCK_DGRAM;
    hints.ai_flags = AI_PASSIVE; // use my IP

    if ((rv = getaddrinfo(NULL, MYPORT, &hints, &servinfo)) != 0) {
        fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(rv));
        return 1;
    }

    // loop through all the results and bind to the first we can
    for(p = servinfo; p != NULL; p = p->ai_next) {
        if ((sockfd = socket(p->ai_family, p->ai_socktype,
                p->ai_protocol)) == -1) {
            perror("listener: socket");
            continue;
        }

        if (bind(sockfd, p->ai_addr, p->ai_addrlen) == -1) {
            close(sockfd);
            perror("listener: bind");
            continue;
        }

        break;
    }

    if (p == NULL) {
        fprintf(stderr, "listener: failed to bind socket\n");
        return 2;
    }

    freeaddrinfo(servinfo);

    printf("listener: waiting to recvfrom...\n");

    addr_len = sizeof their_addr;
    if ((numbytes = recvfrom(sockfd, buf, MAXBUFLEN-1 , 0,
        (struct sockaddr *)&their_addr, &addr_len)) == -1) {
        perror("recvfrom");
        exit(1);
    }

    printf("listener: got packet from %s\n",
        inet_ntop(their_addr.ss_family,
            get_in_addr((struct sockaddr *)&their_addr),
            s, sizeof s));
    printf("listener: packet is %d bytes long\n", numbytes);
    buf[numbytes] = '\0';
    printf("listener: packet contains \"%s\"\n", buf);

    close(sockfd);

    return 0;
}
```

Notice that in our call to **getaddrinfo()** we're finally using SOCK_DGRAM. Also, note that there's no need to **listen()** or **accept()**. This is one of the perks of using unconnected datagram sockets

Next comes the source for *talker.c*[23]:

```
/*
** talker.c -- a datagram "client" demo
*/

#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
```

---

23. http://beej.us/guide/bgnet/examples/talker.c

```c
#include <errno.h>
#include <string.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <arpa/inet.h>
#include <netdb.h>

#define SERVERPORT "4950"    // the port users will be connecting to

int main(int argc, char *argv[])
{
    int sockfd;
    struct addrinfo hints, *servinfo, *p;
    int rv;
    int numbytes;

    if (argc != 3) {
        fprintf(stderr,"usage: talker hostname message\n");
        exit(1);
    }

    memset(&hints, 0, sizeof hints);
    hints.ai_family = AF_UNSPEC;
    hints.ai_socktype = SOCK_DGRAM;

    if ((rv = getaddrinfo(argv[1], SERVERPORT, &hints, &servinfo)) != 0) {
        fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(rv));
        return 1;
    }

    // loop through all the results and make a socket
    for(p = servinfo; p != NULL; p = p->ai_next) {
        if ((sockfd = socket(p->ai_family, p->ai_socktype,
                p->ai_protocol)) == -1) {
            perror("talker: socket");
            continue;
        }

        break;
    }

    if (p == NULL) {
        fprintf(stderr, "talker: failed to bind socket\n");
        return 2;
    }

    if ((numbytes = sendto(sockfd, argv[2], strlen(argv[2]), 0,
            p->ai_addr, p->ai_addrlen)) == -1) {
        perror("talker: sendto");
        exit(1);
    }

    freeaddrinfo(servinfo);

    printf("talker: sent %d bytes to %s\n", numbytes, argv[1]);
    close(sockfd);

    return 0;
}
```

And that s all there is to it Run **listener** on some machine, then run **talker** on another. Watch them communicate Fun G-rated excitement for the entire nuclear family

ou don t even have to run the server this time   ou can run **talker** by itself, and it just happily fires packets off into the ether where they disappear if no one is ready with a `recvfrom()` on the other side. Remember: data sent using UDP datagram sockets isn t guaranteed to arrive

xcept for one more tiny detail that I ve mentioned many times in the past: connected datagram sockets. I need to talk about this here, since we re in the datagram section of the document. Let s say that **talker** calls **connect()** and specifies the **listener** s address. From that point on, **talker** may only sent to and receive from the address specified by **connect()**. For this reason, you don t have to use **sendto()** and **recvfrom()** you can simply use **send()** and **recv()**.

7. Slightly Advanced Techniques

These aren't *really* advanced, but they're getting out of the more basic levels we've already covered. In fact, if you've gotten this far, you should consider yourself fairly accomplished in the basics of Unix network programming Congratulations

So here we go into the brave new world of some of the more esoteric things you might want to learn about sockets. Have at it

7.1. Blocking

Blocking. ou've heard about it   now what the heck is it In a nutshell, "block" is techie jargon for "sleep". ou probably noticed that when you run **listener**, above, it just sits there until a packet arrives. What happened is that it called **recvfrom()**, there was no data, and so **recvfrom()** is said to "block" that is, sleep there until some data arrives.

Lots of functions block. **accept()** blocks. All the **recv()** functions block. The reason they can do this is because they're allowed to. When you first create the socket descriptor with **socket()**, the kernel sets it to blocking. If you don't want a socket to be blocking, you have to make a call to **fcntl()**:

```
#include <unistd.h>
#include <fcntl.h>
.
.
.
sockfd = socket(PF_INET, SOCK_STREAM, 0);
fcntl(sockfd, F_SETFL, O_NONBLOCK);
.
.
.
```

By setting a socket to non-blocking, you can effectively "poll" the socket for information. If you try to read from a non-blocking socket and there's no data there, it's not allowed to block   it will return -1 and *errno* will be set to EWOULDBLOCK.

Generally speaking, however, this type of polling is a bad idea. If you put your program in a busy-wait looking for data on the socket, you'll suck up CPU time like it was going out of style. A more elegant solution for checking to see if there's data waiting to be read comes in the following section on **select()**.

7.2. `select()`—Synchronous I/O Multiplexing

This function is somewhat strange, but it's very useful. Take the following situation: you are a server and you want to listen for incoming connections as well as keep reading from the connections you already have.

No problem, you say, just an **accept()** and a couple of **recv()**s. Not so fast, buster What if you're blocking on an **accept()** call How are you going to **recv()** data at the same time "Use non-blocking sockets " No way   ou don't want to be a CPU hog. What, then

select() gives you the power to monitor several sockets at the same time. It'll tell you which ones are ready for reading, which are ready for writing, and which sockets have raised exceptions, if you really want to know that.

This being said, in modern times **select()**, though very portable, is one of the slowest methods for monitoring sockets. One possible alternative is libevent[24], or something similar, that encapsulates all the system-dependent stuff involved with getting socket notifications.

Without any further ado, I'll offer the synopsis of **select()**:

```
#include <sys/time.h>
#include <sys/types.h>
#include <unistd.h>

int select(int numfds, fd_set *readfds, fd_set *writefds,
```

---

24. `http://www.monkey.org/~provos/libevent/`

```
              fd_set *exceptfds, struct timeval *timeout);
```

The function monitors "sets" of file descriptors in particular *readfds*, *writefds*, and *exceptfds*. If you want to see if you can read from standard input and some socket descriptor, *sockfd*, just add the file descriptors 0 and *sockfd* to the set *readfds*. The parameter *numfds* should be set to the values of the highest file descriptor plus one. In this example, it should be set to *sockfd+1*, since it is assuredly higher than standard input 0 .

When **select()** returns, *readfds* will be modified to reflect which of the file descriptors you selected which is ready for reading.   ou can test them with the macro **FD_ISSET()**, below.

Before progressing much further, I ll talk about how to manipulate these sets.   ach set is of the type fd_set. The following macros operate on this type:

FD_SET(int fd, fd_set *set);	Add *fd* to the *set*.
FD_CLR(int fd, fd_set *set);	Remove *fd* from the *set*.
FD_ISSET(int fd, fd_set *set);	Return true if *fd* is in the *set*.
FD_ZERO(fd_set *set);	Clear all entries from the *set*.

Finally, what is this weirded out struct timeval Well, sometimes you don t want to wait forever for someone to send you some data. Maybe every 9   seconds you want to print "Still Going..." to the terminal even though nothing has happened. This time structure allows you to specify a timeout period. If the time is exceeded and **select()** still hasn t found any ready file descriptors, it ll return so you can continue processing.

The struct timeval has the follow fields:

```
struct timeval {
    int tv_sec;     // seconds
    int tv_usec;    // microseconds
};
```

Just set *tv_sec* to the number of seconds to wait, and set *tv_usec* to the number of microseconds to wait.   es, that s *micro*seconds, not milliseconds. There are 1,000 microseconds in a millisecond, and 1,000 milliseconds in a second. Thus, there are 1,000,000 microseconds in a second. Why is it "usec" The "u" is supposed to look like the Greek letter   Mu that we use for "micro". Also, when the function returns, *timeout might* be updated to show the time still remaining. This depends on what flavor of Unix you re running.

ay We have a microsecond resolution timer Well, don t count on it.   ou ll probably have to wait some part of your standard Unix timeslice no matter how small you set your struct timeval.

Other things of interest: If you set the fields in your struct timeval to 0, **select()** will timeout immediately, effectively polling all the file descriptors in your sets. If you set the parameter *timeout* to NULL, it will never timeout, and will wait until the first file descriptor is ready. Finally, if you don t care about waiting for a certain set, you can just set it to NULL in the call to **select()**.

The following code snippet[25] waits 2.5 seconds for something to appear on standard input:

```
/*
** select.c -- a select() demo
*/

#include <stdio.h>
#include <sys/time.h>
#include <sys/types.h>
#include <unistd.h>

#define STDIN 0  // file descriptor for standard input

int main(void)
{
    struct timeval tv;
    fd_set readfds;
```

---

25. `http://beej.us/guide/bgnet/examples/select.c`

```
    tv.tv_sec = 2;
    tv.tv_usec = 500000;

    FD_ZERO(&readfds);
    FD_SET(STDIN, &readfds);

    // don't care about writefds and exceptfds:
    select(STDIN+1, &readfds, NULL, NULL, &tv);

    if (FD_ISSET(STDIN, &readfds))
        printf("A key was pressed!\n");
    else
        printf("Timed out.\n");

    return 0;
}
```

If you re on a line buffered terminal, the key you hit should be R TURN or it will time out anyway.

Now, some of you might think this is a great way to wait for data on a datagram socket   and you are right: it *might* be. Some Unices can use select in this manner, and some can t. ou should see what your local man page says on the matter if you want to attempt it.

Some Unices update the time in your `struct timeval` to reflect the amount of time still remaining before a timeout. But others do not. Don t rely on that occurring if you want to be portable. Use **`gettimeofday()`** if you need to track time elapsed. It s a bummer, I know, but that s the way it is.

What happens if a socket in the read set closes the connection Well, in that case, **`select()`** returns with that socket descriptor set as "ready to read". When you actually do **`recv()`** from it, **`recv()`** will return `0`. That s how you know the client has closed the connection.

One more note of interest about **`select()`**: if you have a socket that is **`listen()`**ing, you can check to see if there is a new connection by putting that socket s file descriptor in the *readfds* set.

And that, my friends, is a uick overview of the almighty **`select()`** function.

But, by popular demand, here is an in-depth example. Unfortunately, the difference between the dirt-simple example, above, and this one here is significant. But have a look, then read the description that follows it.

This program[2] acts like a simple multi-user chat server. Start it running in one window, then **telnet** to it "**telnet hostname 9034**" from multiple other windows. When you type something in one **telnet** session, it should appear in all the others.

```
/*
** selectserver.c -- a cheezy multiperson chat server
*/

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <arpa/inet.h>
#include <netdb.h>

#define PORT "9034"   // port we're listening on

// get sockaddr, IPv4 or IPv6:
void *get_in_addr(struct sockaddr *sa)
{
    if (sa->sa_family == AF_INET) {
        return &(((struct sockaddr_in*)sa)->sin_addr);
    }
```

----

2 .http://beej.us/guide/bgnet/examples/selectserver.c

```
    return &(((struct sockaddr_in6*)sa)->sin6_addr);
}

int main(void)
{
    fd_set master;    // master file descriptor list
    fd_set read_fds;  // temp file descriptor list for select()
    int fdmax;        // maximum file descriptor number

    int listener;     // listening socket descriptor
    int newfd;        // newly accept()ed socket descriptor
    struct sockaddr_storage remoteaddr; // client address
    socklen_t addrlen;

    char buf[256];    // buffer for client data
    int nbytes;

    char remoteIP[INET6_ADDRSTRLEN];

    int yes=1;        // for setsockopt() SO_REUSEADDR, below
    int i, j, rv;

    struct addrinfo hints, *ai, *p;

    FD_ZERO(&master);    // clear the master and temp sets
    FD_ZERO(&read_fds);

    // get us a socket and bind it
    memset(&hints, 0, sizeof hints);
    hints.ai_family = AF_UNSPEC;
    hints.ai_socktype = SOCK_STREAM;
    hints.ai_flags = AI_PASSIVE;
    if ((rv = getaddrinfo(NULL, PORT, &hints, &ai)) != 0) {
        fprintf(stderr, "selectserver: %s\n", gai_strerror(rv));
        exit(1);
    }

    for(p = ai; p != NULL; p = p->ai_next) {
        listener = socket(p->ai_family, p->ai_socktype, p->ai_protocol);
        if (listener < 0) {
            continue;
        }

        // lose the pesky "address already in use" error message
        setsockopt(listener, SOL_SOCKET, SO_REUSEADDR, &yes, sizeof(int));

        if (bind(listener, p->ai_addr, p->ai_addrlen) < 0) {
            close(listener);
            continue;
        }

        break;
    }

    // if we got here, it means we didn't get bound
    if (p == NULL) {
        fprintf(stderr, "selectserver: failed to bind\n");
        exit(2);
    }

    freeaddrinfo(ai); // all done with this

    // listen
    if (listen(listener, 10) == -1) {
        perror("listen");
        exit(3);
    }
```

```
    // add the listener to the master set
    FD_SET(listener, &master);

    // keep track of the biggest file descriptor
    fdmax = listener; // so far, it's this one

    // main loop
    for(;;) {
        read_fds = master; // copy it
        if (select(fdmax+1, &read_fds, NULL, NULL, NULL) == -1) {
            perror("select");
            exit(4);
        }

        // run through the existing connections looking for data to read
        for(i = 0; i <= fdmax; i++) {
            if (FD_ISSET(i, &read_fds)) { // we got one!!
                if (i == listener) {
                    // handle new connections
                    addrlen = sizeof remoteaddr;
                    newfd = accept(listener,
                        (struct sockaddr *)&remoteaddr,
                        &addrlen);

                    if (newfd == -1) {
                        perror("accept");
                    } else {
                        FD_SET(newfd, &master); // add to master set
                        if (newfd > fdmax) {    // keep track of the max
                            fdmax = newfd;
                        }
                        printf("selectserver: new connection from %s on "
                            "socket %d\n",
                            inet_ntop(remoteaddr.ss_family,
                                get_in_addr((struct sockaddr*)&remoteaddr),
                                remoteIP, INET6_ADDRSTRLEN),
                            newfd);
                    }
                } else {
                    // handle data from a client
                    if ((nbytes = recv(i, buf, sizeof buf, 0)) <= 0) {
                        // got error or connection closed by client
                        if (nbytes == 0) {
                            // connection closed
                            printf("selectserver: socket %d hung up\n", i);
                        } else {
                            perror("recv");
                        }
                        close(i); // bye!
                        FD_CLR(i, &master); // remove from master set
                    } else {
                        // we got some data from a client
                        for(j = 0; j <= fdmax; j++) {
                            // send to everyone!
                            if (FD_ISSET(j, &master)) {
                                // except the listener and ourselves
                                if (j != listener && j != i) {
                                    if (send(j, buf, nbytes, 0) == -1) {
                                        perror("send");
                                    }
                                }
                            }
                        }
                    }
                } // END handle data from client
            } // END got new incoming connection
```

```
        } // END looping through file descriptors
    } // END for(;;)--and you thought it would never end!

    return 0;
}
```

Notice I have two file descriptor sets in the code: *master* and *read_fds*. The first, *master*, holds all the socket descriptors that are currently connected, as well as the socket descriptor that is listening for new connections.

The reason I have the *master* set is that **select()** actually *changes* the set you pass into it to reflect which sockets are ready to read. Since I have to keep track of the connections from one call of **select()** to the next, I must store these safely away somewhere. At the last minute, I copy the *master* into the *read_fds*, and then call **select()**.

But doesn't this mean that every time I get a new connection, I have to add it to the *master* set up And every time a connection closes, I have to remove it from the *master* set es, it does.

Notice I check to see when the *listener* socket is ready to read. When it is, it means I have a new connection pending, and I **accept()** it and add it to the *master* set. Similarly, when a client connection is ready to read, and **recv()** returns 0, I know the client has closed the connection, and I must remove it from the *master* set.

If the client **recv()** returns non-zero, though, I know some data has been received. So I get it, and then go through the *master* list and send that data to all the rest of the connected clients.

And that, my friends, is a less-than-simple overview of the almighty **select()** function.

In addition, here is a bonus afterthought: there is another function called **poll()** which behaves much the same way **select()** does, but with a different system for managing the file descriptor sets. Check it out

7.3. Handling Partial send()s

Remember back in the section about **send()**, above, when I said that **send()** might not send all the bytes you asked it to   That is, you want it to send 512 bytes, but it returns 412. What happened to the remaining 100 bytes

Well, they're still in your little buffer waiting to be sent out. Due to circumstances beyond your control, the kernel decided not to send all the data out in one chunk, and now, my friend, it's up to you to get the data out there.

ou could write a function like this to do it, too:

```
#include <sys/types.h>
#include <sys/socket.h>

int sendall(int s, char *buf, int *len)
{
    int total = 0;        // how many bytes we've sent
    int bytesleft = *len; // how many we have left to send
    int n;

    while(total < *len) {
        n = send(s, buf+total, bytesleft, 0);
        if (n == -1) { break; }
        total += n;
        bytesleft -= n;
    }

    *len = total; // return number actually sent here

    return n==-1?-1:0; // return -1 on failure, 0 on success
}
```

In this example, *s* is the socket you want to send the data to, *buf* is the buffer containing the data, and *len* is a pointer to an int containing the number of bytes in the buffer.

The function returns -1 on error and *errno* is still set from the call to **send()**. Also, the number of bytes actually sent is returned in *len*. This will be the same number of bytes you asked it to send,

unless there was an error. **sendall()** will do it s best, huffing and puffing, to send the data out, but if there s an error, it gets back to you right away.

For completeness, here s a sample call to the function:

```
char buf[10] = "Beej!";
int len;

len = strlen(buf);
if (sendall(s, buf, &len) == -1) {
    perror("sendall");
    printf("We only sent %d bytes because of the error!\n", len);
}
```

What happens on the receiver s end when part of a packet arrives If the packets are variable length, how does the receiver know when one packet ends and another begins   es, real-world scenarios are a royal pain in the donkeys.   ou probably have to *encapsulate* remember that from the data encapsulation section way back there at the beginning   Read on for details

7.4. Serialization—How to Pack Data

It s easy enough to send text data across the network, you re finding, but what happens if you want to send some "binary" data like `ints` or `floats` It turns out you have a few options.

1. Convert the number into text with a function like **sprintf()**, then send the text. The receiver will parse the text back into a number using a function like **strtol()**.

2. Just send the data raw, passing a pointer to the data to **send()**.

3. ncode the number into a portable binary form. The receiver will decode it.

Sneak preview Tonight only
Curtain raises
Beej says, "I prefer Method Three, above "
THE END

Before I begin this section in earnest, I should tell you that there are libraries out there for doing this, and rolling your own and remaining portable and error-free is uite a challenge. So hunt around and do your homework before deciding to implement this stuff yourself. I include the information here for those curious about how things like this work.

Actually all the methods, above, have their drawbacks and advantages, but, like I said, in general, I prefer the third method. First, though, let s talk about some of the drawbacks and advantages to the other two.

The first method, encoding the numbers as text before sending, has the advantage that you can easily print and read the data that s coming over the wire. Sometimes a human-readable protocol is excellent to use in a non-bandwidth-intensive situation, such as with Internet Relay Chat IRC [2] . However, it has the disadvantage that it is slow to convert, and the results almost always take up more space than the original number

Method two: passing the raw data. This one is uite easy but dangerous : just take a pointer to the data to send, and call send with it.

```
double d = 3490.15926535;

send(s, &d, sizeof d, 0);  /* DANGER--non-portable! */
```

The receiver gets it like this:

```
double d;

recv(s, &d, sizeof d, 0);  /* DANGER--non-portable! */
```

2 . http://en.wikipedia.org/wiki/Internet_Relay_Chat

Fast, simple what's not to like Well, it turns out that not all architectures represent a `double` or `int` for that matter with the same bit representation or even the same byte ordering The code is decidedly non-portable. Hey maybe you don't need portability, in which case this is nice and fast.

When packing integer types, we've already seen how the **htons()**-class of functions can help keep things portable by transforming the numbers into Network Byte Order, and how that's the Right Thing to do. Unfortunately, there are no similar functions for `float` types. Is all hope lost

Fear not Were you afraid there for a second No Not even a little bit There is something we can do: we can pack or "marshal", or "serialize", or one of a thousand million other names the data into a known binary format that the receiver can unpack on the remote side.

What do I mean by "known binary format" Well, we've already seen the **htons()** example, right It changes or "encodes", if you want to think of it that way a number from whatever the host format is into Network Byte Order. To reverse unencode the number, the receiver calls **ntohs()**.

But didn't I just get finished saying there wasn't any such function for other non-integer types es. I did. And since there's no standard way in C to do this, it's a bit of a pickle that a gratuitous pun there for you Python fans .

The thing to do is to pack the data into a known format and send that over the wire for decoding. For example, to pack `float`s, here's something uick and dirty with plenty of room for improvement:[2]

```c
#include <stdint.h>

uint32_t htonf(float f)
{
    uint32_t p;
    uint32_t sign;

    if (f < 0) { sign = 1; f = -f; }
    else { sign = 0; }

    p = ((((uint32_t)f)&0x7fff)<<16) | (sign<<31); // whole part and sign
    p |= (uint32_t)(((f - (int)f) * 65536.0f))&0xffff; // fraction

    return p;
}

float ntohf(uint32_t p)
{
    float f = ((p>>16)&0x7fff); // whole part
    f += (p&0xffff) / 65536.0f; // fraction

    if (((p>>31)&0x1) == 0x1) { f = -f; } // sign bit set

    return f;
}
```

The above code is sort of a naive implementation that stores a `float` in a 32-bit number. The high bit 31 is used to store the sign of the number "1" means negative , and the next seven bits 30-1 are used to store the whole number portion of the `float`. Finally, the remaining bits 15-0 are used to store the fractional portion of the number.

Usage is fairly straightforward:

```c
#include <stdio.h>

int main(void)
{
    float f = 3.1415926, f2;
    uint32_t netf;

    netf = htonf(f);  // convert to "network" form
    f2 = ntohf(netf); // convert back to test

    printf("Original: %f\n", f);        // 3.141593
```

---

2 .http://beej.us/guide/bgnet/examples/pack.c

```
    printf(" Network: 0x%08X\n", netf); // 0x0003243F
    printf("Unpacked: %f\n", f2);       // 3.141586

    return 0;
}
```

On the plus side, it s small, simple, and fast. On the minus side, it s not an efficient use of space and the range is severely restricted   try storing a number greater-than 32   in there and it won t be

```
    result = (i&((1LL<<significandbits)-1)); // mask
    result /= (1LL<<significandbits); // convert back to float
    result += 1.0f; // add the one back on

    // deal with the exponent
    bias = (1<<(expbits-1)) - 1;
    shift = ((i>>significandbits)&((1LL<<expbits)-1)) - bias;
    while(shift > 0) { result *= 2.0; shift--; }
    while(shift < 0) { result /= 2.0; shift++; }

    // sign it
    result *= (i>>(bits-1))&1? -1.0: 1.0;

    return result;
}
```

I put some handy macros up there at the top for packing and unpacking 32-bit probably a `float` and 4-bit probably a `double` numbers, but the **pack754()** function could be called directly and told to encode *bits*-worth of data *expbits* of which are reserved for the normalized number s exponent.

Here s sample usage:

```
#include <stdio.h>
#include <stdint.h> // defines uintN_t types
#include <inttypes.h> // defines PRIx macros

int main(void)
{
    float f = 3.1415926, f2;
    double d = 3.14159265358979323, d2;
    uint32_t fi;
    uint64_t di;

    fi = pack754_32(f);
    f2 = unpack754_32(fi);

    di = pack754_64(d);
    d2 = unpack754_64(di);

    printf("float before : %.7f\n", f);
    printf("float encoded: 0x%08" PRIx32 "\n", fi);
    printf("float after  : %.7f\n\n", f2);

    printf("double before : %.20lf\n", d);
    printf("double encoded: 0x%016" PRIx64 "\n", di);
    printf("double after  : %.20lf\n", d2);

    return 0;
}
```

The above code produces this output:

```
float before : 3.1415925
float encoded: 0x40490FDA
float after  : 3.1415925

double before : 3.14159265358979311600
double encoded: 0x400921FB54442D18
double after  : 3.14159265358979311600
```

Another uestion you might have is how do you pack `structs` Unfortunately for you, the compiler is free to put padding all over the place in a `struct`, and that means you can t portably send the whole thing over the wire in one chunk. Aren t you getting sick of hearing "can t do this", "can t do that" Sorry To uote a friend, "Whenever anything goes wrong, I always blame Microsoft." This one might not be Microsoft s fault, admittedly, but my friend s statement is completely true.

Back to it: the best way to send the `struct` over the wire is to pack each field independently and then unpack them into the `struct` when they arrive on the other side.

That s a lot of work, is what you re thinking.   es, it is. One thing you can do is write a helper function to help pack the data for you. It ll be fun Really

In the book "The Practice of Programming[31]" by Kernighan and Pike, they implement **printf()**-like functions called **pack()** and **unpack()** that do exactly this. I d link to them, but apparently those functions aren t online with the rest of the source from the book.

The Practice of Programming is an excellent read.   eus saves a kitten every time I recommend it.

At this point, I m going to drop a pointer to the BSD-licensed Typed Parameter Language C API[32] which I ve never used, but looks completely respectable. Python and Perl programmers will want to check out their language s **pack()** and **unpack()** functions for accomplishing the same thing. And Java has a big-ol Serializable interface that can be used in a similar way.

But if you want to write your own packing utility in C, K P s trick is to use variable argument lists to make **printf()**-like functions to build the packets. Here s a version I cooked up[33] on my own based on that which hopefully will be enough to give you an idea of how such a thing can work.

This code references the **pack754()** functions, above. The **packi*()** functions operate like the familiar **htons()** family, except they pack into a char array instead of another integer.

```c
#include <ctype.h>
#include <stdarg.h>
#include <string.h>
#include <stdint.h>
#include <inttypes.h>

// various bits for floating point types--
// varies for different architectures
typedef float float32_t;
typedef double float64_t;

/*
** packi16() -- store a 16-bit int into a char buffer (like htons())
*/
void packi16(unsigned char *buf, unsigned int i)
{
    *buf++ = i>>8; *buf++ = i;
}

/*
** packi32() -- store a 32-bit int into a char buffer (like htonl())
*/
void packi32(unsigned char *buf, unsigned long i)
{
    *buf++ = i>>24; *buf++ = i>>16;
    *buf++ = i>>8;  *buf++ = i;
}

/*
** unpacki16() -- unpack a 16-bit int from a char buffer (like ntohs())
*/
unsigned int unpacki16(unsigned char *buf)
{
    return (buf[0]<<8) | buf[1];
}

/*
** unpacki32() -- unpack a 32-bit int from a char buffer (like ntohl())
*/
unsigned long unpacki32(unsigned char *buf)
{
    return (buf[0]<<24) | (buf[1]<<16) | (buf[2]<<8) | buf[3];
}
```

---

31. http://cm.bell-labs.com/cm/cs/tpop/
32. http://tpl.sourceforge.net/
33. http://beej.us/guide/bgnet/examples/pack2.c

```
/*
** pack() -- store data dictated by the format string in the buffer
**
**   h - 16-bit              l - 32-bit
**   c - 8-bit char          f - float, 32-bit
**   s - string (16-bit length is automatically prepended)
*/
int32_t pack(unsigned char *buf, char *format, ...)
{
    va_list ap;
    int16_t h;
    int32_t l;
    int8_t c;
    float32_t f;
    char *s;
    int32_t size = 0, len;

    va_start(ap, format);

    for(; *format != '\0'; format++) {
        switch(*format) {
        case 'h': // 16-bit
            size += 2;
            h = (int16_t)va_arg(ap, int); // promoted
            packi16(buf, h);
            buf += 2;
            break;

        case 'l': // 32-bit
            size += 4;
            l = va_arg(ap, int32_t);
            packi32(buf, l);
            buf += 4;
            break;

        case 'c': // 8-bit
            size += 1;
            c = (int8_t)va_arg(ap, int); // promoted
            *buf++ = (c>>0)&0xff;
            break;

        case 'f': // float
            size += 4;
            f = (float32_t)va_arg(ap, double); // promoted
            l = pack754_32(f); // convert to IEEE 754
            packi32(buf, l);
            buf += 4;
            break;

        case 's': // string
            s = va_arg(ap, char*);
            len = strlen(s);
            size += len + 2;
            packi16(buf, len);
            buf += 2;
            memcpy(buf, s, len);
            buf += len;
            break;
        }
    }

    va_end(ap);

    return size;
}

/*
```

```
** unpack() -- unpack data dictated by the format string into the buffer
*/
void unpack(unsigned char *buf, char *format, ...)
{
    va_list ap;
    int16_t *h;
    int32_t *l;
    int32_t pf;
    int8_t *c;
    float32_t *f;
    char *s;
    int32_t len, count, maxstrlen=0;

    va_start(ap, format);

    for(; *format != '\0'; format++) {
        switch(*format) {
        case 'h': // 16-bit
            h = va_arg(ap, int16_t*);
            *h = unpacki16(buf);
            buf += 2;
            break;

        case 'l': // 32-bit
            l = va_arg(ap, int32_t*);
            *l = unpacki32(buf);
            buf += 4;
            break;

        case 'c': // 8-bit
            c = va_arg(ap, int8_t*);
            *c = *buf++;
            break;

        case 'f': // float
            f = va_arg(ap, float32_t*);
            pf = unpacki32(buf);
            buf += 4;
            *f = unpack754_32(pf);
            break;

        case 's': // string
            s = va_arg(ap, char*);
            len = unpacki16(buf);
            buf += 2;
            if (maxstrlen > 0 && len > maxstrlen) count = maxstrlen - 1;
            else count = len;
            memcpy(s, buf, count);
            s[count] = '\0';
            buf += len;
            break;

        default:
            if (isdigit(*format)) { // track max str len
                maxstrlen = maxstrlen * 10 + (*format-'0');
            }
        }

        if (!isdigit(*format)) maxstrlen = 0;
    }

    va_end(ap);
}
```

And here is a demonstration program[34] of the above code that packs some data into *buf* and then unpacks it into variables. Note that when calling **unpack()** with a string argument format specifier "s" , it s wise to put a maximum length count in front of it to prevent a buffer overrun, e.g. "96s". Be wary when unpacking data you get over the network   a malicious user might send badly-constructed packets in an effort to attack your system

```
#include <stdio.h>

// various bits for floating point types--
// varies for different architectures
typedef float float32_t;
typedef double float64_t;

int main(void)
{
    unsigned char buf[1024];
    int8_t magic;
    int16_t monkeycount;
    int32_t altitude;
    float32_t absurdityfactor;
    char *s = "Great unmitigated Zot!  You've found the Runestaff!";
    char s2[96];
    int16_t packetsize, ps2;

    packetsize = pack(buf, "chhlsf", (int8_t)'B', (int16_t)0, (int16_t)37,
            (int32_t)-5, s, (float32_t)-3490.6677);
    packi16(buf+1, packetsize); // store packet size in packet for kicks

    printf("packet is %" PRId32 " bytes\n", packetsize);

    unpack(buf, "chhl96sf", &magic, &ps2, &monkeycount, &altitude, s2,
        &absurdityfactor);

    printf("'%c' %" PRId32" %" PRId16 " %" PRId32
            " \"%s\" %f\n", magic, ps2, monkeycount,
            altitude, s2, absurdityfactor);

    return 0;
}
```

Whether you roll your own code or use someone else s, it s a good idea to have a general set of data packing routines for the sake of keeping bugs in check, rather than packing each bit by hand each time.

When packing the data, what s a good format to use   xcellent uestion. Fortunately, RFC 450 [35], the xternal Data Representation Standard, already defines binary formats for a bunch of different types, like floating point types, integer types, arrays, raw data, etc. I suggest conforming to that if you re going to roll the data yourself. But you re not obligated to. The Packet Police are not right outside your door. At least, I don t *think* they are.

In any case, encoding the data somehow or another before you send it is the right way of doing things

7.5. Son of Data Encapsulation

What does it really mean to encapsulate data, anyway   In the simplest case, it means you ll stick a header on there with either some identifying information or a packet length, or both.

What should your header look like   Well, it s just some binary data that represents whatever you feel is necessary to complete your project.

Wow. That s vague.

Okay. For instance, let s say you have a multi-user chat program that uses SOCK_STREAMs. When a user types "says" something, two pieces of information need to be transmitted to the server: what was said and who said it.

---

34. http://beej.us/guide/bgnet/examples/pack2.c
35. http://tools.ietf.org/html/rfc4506

So far so good "What s the problem " you re asking.

The problem is that the messages can be of varying lengths. One person named "tom" might say, "Hi", and another person named "Benjamin" might say, "Hey guys what is up "

So you **send()** all this stuff to the clients as it comes in. our outgoing data stream looks like this:

```
t o m H i B e n j a m i n H e y g u y s w h a t i s u p ?
```

And so on. How does the client know when one message starts and another stops ou could, if you wanted, make all messages the same length and just call the **sendall()** we implemented, above. But that wastes bandwidth We don t want to **send()** 1024 bytes just so "tom" can say "Hi".

So we *encapsulate* the data in a tiny header and packet structure. Both the client and server know how to pack and unpack sometimes referred to as "marshal" and "unmarshal" this data. Don t look now, but we re starting to define a *protocol* that describes how a client and server communicate

In this case, let s assume the user name is a fixed length of characters, padded with `'\0'`. And then let s assume the data is variable length, up to a maximum of 12 characters. Let s have a look a sample packet structure that we might use in this situation:

1. `len` 1 byte, unsigned The total length of the packet, counting the -byte user name and chat data.

2. `name` bytes The user s name, NUL-padded if necessary.

3. `chatdata` *n*-bytes The data itself, no more than 12 bytes. The length of the packet should be calculated as the length of this data plus the length of the name field, above .

Why did I choose the -byte and 12 -byte limits for the fields I pulled them out of the air, assuming they d be long enough. Maybe, though, bytes is too restrictive for your needs, and you can have a 30-byte name field, or whatever. The choice is up to you.

Using the above packet definition, the first packet would consist of the following information in hex and ASCII :

```
  0A      74 6F 6D 00 00 00 00 00      48 69
(length)  T  o  m    (padding)         H  i
```

And the second is similar:

```
  18      42 65 6E 6A 61 6D 69 6E      48 65 79 20 67 75 79 73 20 77 ...
(length)  B  e  n  j  a  m  i  n       H  e  y     g  u  y  s     w ...
```

The length is stored in Network Byte Order, of course. In this case, it s only one byte so it doesn t matter, but generally speaking you ll want all your binary integers to be stored in Network Byte Order in your packets.

When you re sending this data, you should be safe and use a command similar to **sendall()**, above, so you know all the data is sent, even if it takes multiple calls to **send()** to get it all out.

Likewise, when you re receiving this data, you need to do a bit of extra work. To be safe, you should assume that you might receive a partial packet like maybe we receive "18 42 65 6E 6A" from Benjamin, above, but that s all we get in this call to **recv()** . We need to call **recv()** over and over again until the packet is completely received.

But how Well, we know the number of bytes we need to receive in total for the packet to be complete, since that number is tacked on the front of the packet. We also know the maximum packet size is 1 12 , or 13 bytes because that s how we defined the packet.

There are actually a couple things you can do here. Since you know every packet starts off with a length, you can call **recv()** just to get the packet length. Then once you have that, you can call it again specifying exactly the remaining length of the packet possibly repeatedly to get all the data until you have the complete packet. The advantage of this method is that you only need a buffer large enough for one packet, while the disadvantage is that you need to call **recv()** at least twice to get all the data.

Another option is just to call **recv()** and say the amount you re willing to receive is the maximum number of bytes in a packet. Then whatever you get, stick it onto the back of a buffer, and finally check to see if the packet is complete. Of course, you might get some of the next packet, so you ll need to have room for that.

What you can do is declare an array big enough for two packets. This is your work array where you will reconstruct packets as they arrive.

very time you `recv()` data, you ll append it into the work buffer and check to see if the packet is complete. That is, the number of bytes in the buffer is greater than or e ual to the length specified in the header   1, because the length in the header doesn t include the byte for the length itself. If the number of bytes in the buffer is less than 1, the packet is not complete, obviously.   ou have to make a special case for this, though, since the first byte is garbage and you can t rely on it for the correct packet length.

Once the packet is complete, you can do with it what you will. Use it, and remove it from your work buffer.

Whew Are you juggling that in your head yet Well, here s the second of the one-two punch: you might have read past the end of one packet and onto the next in a single `recv()` call. That is, you have a work buffer with one complete packet, and an incomplete part of the next packet Bloody heck. But this is why you made your work buffer large enough to hold *two* packets   in case this happened

Since you know the length of the first packet from the header, and you ve been keeping track of the number of bytes in the work buffer, you can subtract and calculate how many of the bytes in the work buffer belong to the second incomplete packet. When you ve handled the first one, you can clear it out of the work buffer and move the partial second packet down the to front of the buffer so it s all ready to go for the next `recv()`.

Some of you readers will note that actually moving the partial second packet to the beginning of the work buffer takes time, and the program can be coded to not re uire this by using a circular buffer. Unfortunately for the rest of you, a discussion on circular buffers is beyond the scope of this article. If you re still curious, grab a data structures book and go from there.

I never said it was easy. Ok, I did say it was easy. And it is you just need practice and pretty soon it ll come to you naturally. By   xcalibur I swear it

7.6. Broadcast Packets—Hello, World!

So far, this guide has talked about sending data from one host to one other host. But it is possible, I insist, that you can, with the proper authority, send data to multiple hosts *at the same time*

With UDP only UDP, not TCP and standard IPv4, this is done through a mechanism called *broadcasting*. With IPv , broadcasting isn t supported, and you have to resort to the often superior techni ue of *multicasting*, which, sadly I won t be discussing at this time. But enough of the starry-eyed future   we re stuck in the 32-bit present.

But wait   ou can t just run off and start broadcasting willy-nilly   ou have to set the socket option `SO_BROADCAST` before you can send a broadcast packet out on the network. It s like a one of those little plastic covers they put over the missile launch switch That s just how much power you hold in your hands

But seriously, though, there is a danger to using broadcast packets, and that is: every system that receives a broadcast packet must undo all the onion-skin layers of data encapsulation until it finds out what port the data is destined to. And then it hands the data over or discards it. In either case, it s a lot of work for each machine that receives the broadcast packet, and since it is all of them on the local network, that could be a lot of machines doing a lot of unnecessary work. When the game Doom first came out, this was a complaint about its network code.

Now, there is more than one way to skin a cat... wait a minute. Is there really more than one way to skin a cat What kind of expression is that Uh, and likewise, there is more than one way to send a broadcast packet. So, to get to the meat and potatoes of the whole thing: how do you specify the destination address for broadcast message There are two common ways:

1. Send the data to a specific subnet s broadcast address. This is the subnet s network number with all one-bits set for the host portion of the address. For instance, at home my network is 192.1   .1.0, my netmask is 255.255.255.0, so the last byte of the address is my host number because the first three bytes, according to the netmask, are the network number . So my broadcast address is 192.1   .1.255. Under Unix, the **ifconfig** command will actually give you all this data. If you re curious, the bitwise logic to get your broadcast address is *network_number* OR NOT *netmask* .   ou can send this type of broadcast packet to remote

networks as well as your local network, but you run the risk of the packet being dropped by the destination s router. If they didn t drop it, then some random smurf could start flooding their LAN with broadcast traffic.

2. Send the data to the "global" broadcast address. This is 255.255.255.255, aka `INADDR_BROADCAST`. Many machines will automatically bitwise AND this with your network number to convert it to a network broadcast address, but some won t. It varies. Routers do not forward this type of broadcast packet off your local network, ironically enough.

So what happens if you try to send data on the broadcast address without first setting the `SO_BROADCAST` socket option Well, let s fire up good old **talker** and **listener** and see what happens.

```
$ talker 192.168.1.2 foo
sent 3 bytes to 192.168.1.2
$ talker 192.168.1.255 foo
sendto: Permission denied
$ talker 255.255.255.255 foo
sendto: Permission denied
```

es, it s not happy at all...because we didn t set the `SO_BROADCAST` socket option. Do that, and now you can **sendto()** anywhere you want

In fact, that s the *only difference* between a UDP application that can broadcast and one that can t. So let s take the old **talker** application and add one section that sets the `SO_BROADCAST` socket option. We ll call this program *broadcaster.c*[3] :

```c
/*
** broadcaster.c -- a datagram "client" like talker.c, except
**                  this one can broadcast
*/

#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
#include <errno.h>
#include <string.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <arpa/inet.h>
#include <netdb.h>

#define SERVERPORT 4950 // the port users will be connecting to

int main(int argc, char *argv[])
{
    int sockfd;
    struct sockaddr_in their_addr; // connector's address information
    struct hostent *he;
    int numbytes;
    int broadcast = 1;
    //char broadcast = '1'; // if that doesn't work, try this

    if (argc != 3) {
        fprintf(stderr,"usage: broadcaster hostname message\n");
        exit(1);
    }

    if ((he=gethostbyname(argv[1])) == NULL) {  // get the host info
        perror("gethostbyname");
        exit(1);
    }

    if ((sockfd = socket(AF_INET, SOCK_DGRAM, 0)) == -1) {
```

---

3 .http://beej.us/guide/bgnet/examples/broadcaster.c

```
            perror("socket");
            exit(1);
    }

    // this call is what allows broadcast packets to be sent:
    if (setsockopt(sockfd, SOL_SOCKET, SO_BROADCAST, &broadcast,
            sizeof broadcast) == -1) {
            perror("setsockopt (SO_BROADCAST)");
            exit(1);
    }

    their_addr.sin_family = AF_INET;      // host byte order
    their_addr.sin_port = htons(SERVERPORT); // short, network byte order
    their_addr.sin_addr = *((struct in_addr *)he->h_addr);
    memset(their_addr.sin_zero, '\0', sizeof their_addr.sin_zero);

    if ((numbytes=sendto(sockfd, argv[2], strlen(argv[2]), 0,
            (struct sockaddr *)&their_addr, sizeof their_addr)) == -1) {
            perror("sendto");
            exit(1);
    }

    printf("sent %d bytes to %s\n", numbytes,
            inet_ntoa(their_addr.sin_addr));

    close(sockfd);

    return 0;
}
```

What s different between this and a "normal" UDP client/server situation Nothing   With the exception of the client being allowed to send broadcast packets in this case. As such, go ahead and run the old UDP **listener** program in one window, and **broadcaster** in another.   ou should be now be able to do all those sends that failed, above.

```
$ broadcaster 192.168.1.2 foo
sent 3 bytes to 192.168.1.2
$ broadcaster 192.168.1.255 foo
sent 3 bytes to 192.168.1.255
$ broadcaster 255.255.255.255 foo
sent 3 bytes to 255.255.255.255
```

And you should see **listener** responding that it got the packets. If **listener** doesn t respond, it could be because it s bound to an IPv address. Try changing the AF_UNSPEC in *listener.c* to AF_INET to force IPv4.

Well, that s kind of exciting. But now fire up **listener** on another machine next to you on the same network so that you have two copies going, one on each machine, and run **broadcaster** again with your broadcast address... Hey Both **listener**s get the packet even though you only called **sendto()** once Cool

If the **listener** gets data you send directly to it, but not data on the broadcast address, it could be that you have a firewall on your local machine that is blocking the packets.   es, Pat and Bapper, thank you for realizing before I did that this is why my sample code wasn t working. I told you I d mention you in the guide, and here you are. So *nyah*.

Again, be careful with broadcast packets. Since every machine on the LAN will be forced to deal with the packet whether it **recvfrom()**s it or not, it can present uite a load to the entire computing network. They are definitely to be used sparingly and appropriately.

8. Common Questions

Where can I get those header files?

If you don t have them on your system already, you probably don t need them. Check the manual for your particular platform. If you re building for Windows, you only need to #include <winsock.h>.

What do I do when `bind()` reports "Address already in use"?

ou have to use `setsockopt()` with the SO_REUSEADDR option on the listening socket. Check out the section on `bind()` and the section on `select()` for an example.

How do I get a list of open sockets on the system?

Use the **netstat**. Check the **man** page for full details, but you should get some good output just typing:

```
$ netstat
```

The only trick is determining which socket is associated with which program. :-)

How can I view the routing table?

Run the **route** command in */sbin* on most Linuxes or the command **netstat -r**.

How can I run the client and server programs if I only have one computer? Don't I need a network to write network programs?

Fortunately for you, virtually all machines implement a loopback network "device" that sits in the kernel and pretends to be a network card. This is the interface listed as "lo" in the routing table.

Pretend you re logged into a machine named "goat". Run the client in one window and the server in another. Or start the server in the background "**server &**" and run the client in the same window. The upshot of the loopback device is that you can either **client goat** or **client localhost** since "localhost" is likely defined in your */etc/hosts* file and you ll have the client talking to the server without a network

In short, no changes are necessary to any of the code to make it run on a single non-networked machine Huzzah

How can I tell if the remote side has closed connection?

ou can tell because `recv()` will return 0.

How do I implement a "ping" utility? What is ICMP? Where can I find out more about raw sockets and `SOCK_RAW`?

All your raw sockets uestions will be answered in W. Richard Stevens UNIX Network Programming books. Also, look in the *ping/* subdirectory in Stevens UNIX Network Programming source code, available online[3] .

How do I change or shorten the timeout on a call to `connect()`?

Instead of giving you exactly the same answer that W. Richard Stevens would give you, I ll just refer you to *lib/connect_nonb.c* in the UNIX Network Programming source code[3] .

The gist of it is that you make a socket descriptor with `socket()`, set it to non-blocking, call `connect()`, and if all goes well `connect()` will return -1 immediately and *errno* will be set to EINPROGRESS. Then you call `select()` with whatever timeout you want, passing the socket descriptor in both the read and write sets. If it doesn t timeout, it means the `connect()` call completed. At this point, you ll have to use `getsockopt()` with the SO_ERROR option to get the return value from the `connect()` call, which should be zero if there was no error.

---

3 .http://www.unpbook.com/src.html
3 .http://www.unpbook.com/src.html

Finally, you ll probably want to set the socket back to be blocking again before you start transferring data over it.

Notice that this has the added benefit of allowing your program to do something else while it s connecting, too.   ou could, for example, set the timeout to something low, like 500 ms, and update an indicator onscreen each timeout, then call **select()** again. When you ve called **select()** and timed-out, say, 20 times, you ll know it s time to give up on the connection.

Like I said, check out Stevens source for a perfectly excellent example.

How do I build for Windows?

First, delete Windows and install Linux or BSD. `};-)`. No, actually, just see the section on building for Windows in the introduction.

How do I build for Solaris/SunOS? I keep getting linker errors when I try to compile!

The linker errors happen because Sun boxes don t automatically compile in the socket libraries. See the section on building for Solaris/SunOS in the introduction for an example of how to do this.

Why does `select()` keep falling out on a signal?

Signals tend to cause blocked system calls to return `-1` with *errno* set to `EINTR`. When you set up a signal handler with **sigaction()**, you can set the flag `SA_RESTART`, which is supposed to restart the system call after it was interrupted.

Naturally, this doesn t always work.

My favorite solution to this involves a `goto` statement.   ou know this irritates your professors to no end, so go for it

```
select_restart:
if ((err = select(fdmax+1, &readfds, NULL, NULL, NULL)) == -1) {
    if (errno == EINTR) {
        // some signal just interrupted us, so restart
        goto select_restart;
    }
    // handle the real error here:
    perror("select");
}
```

Sure, you don t *need* to use `goto` in this case you can use other structures to control it. But I think the `goto` statement is actually cleaner.

How can I implement a timeout on a call to `recv()`?

Use **select()** It allows you to specify a timeout parameter for socket descriptors that you re looking to read from. Or, you could wrap the entire functionality in a single function, like this:

```
#include <unistd.h>
#include <sys/time.h>
#include <sys/types.h>
#include <sys/socket.h>

int recvtimeout(int s, char *buf, int len, int timeout)
{
    fd_set fds;
    int n;
    struct timeval tv;

    // set up the file descriptor set
    FD_ZERO(&fds);
    FD_SET(s, &fds);

    // set up the struct timeval for the timeout
    tv.tv_sec = timeout;
    tv.tv_usec = 0;

    // wait until timeout or data received
```

```
    n = select(s+1, &fds, NULL, NULL, &tv);
    if (n == 0) return -2; // timeout!
    if (n == -1) return -1; // error

    // data must be here, so do a normal recv()
    return recv(s, buf, len, 0);
}
.
.
.
// Sample call to recvtimeout():
n = recvtimeout(s, buf, sizeof buf, 10); // 10 second timeout

if (n == -1) {
    // error occurred
    perror("recvtimeout");
}
else if (n == -2) {
    // timeout occurred
} else {
    // got some data in buf
}
.
.
.
```

Notice that `recvtimeout()` returns `-2` in case of a timeout. Why not return `0` Well, if you recall, a return value of `0` on a call to `recv()` means that the remote side closed the connection. So that return value is already spoken for, and `-1` means "error", so I chose `-2` as my timeout indicator.

How do I encrypt or compress the data before sending it through the socket?

One easy way to do encryption is to use SSL secure sockets layer , but that s beyond the scope of this guide. Check out the OpenSSL project[39] for more info.

But assuming you want to plug in or implement your own compressor or encryption system, it s just a matter of thinking of your data as running through a se uence of steps between both ends. ach step changes the data in some way.

1. server reads data from file or wherever
2. server encrypts/compresses data you add this part
3. server `send()`s encrypted data

Now the other way around:

1. client `recv()`s encrypted data
2. client decrypts/decompresses data you add this part
3. client writes data to file or wherever

If you re going to compress and encrypt, just remember to compress first. `:-)`

Just as long as the client properly undoes what the server does, the data will be fine in the end no matter how many intermediate steps you add.

So all you need to do to use my code is to find the place between where the data is read and the data is sent using `send()` over the network, and stick some code in there that does the encryption.

What is this "PF_INET" I keep seeing? Is it related to `AF_INET`?

 es, yes it is. See the section on `socket()` for details.

---

39. http://www.openssl.org/

How can I write a server that accepts shell commands from a client and executes them?

For simplicity, lets say the client **connect()**s, **send()**s, and **close()**s the connection that is, there are no subse uent system calls without the client connecting again.

The process the client follows is this:

1. **connect()** to server

2. **send("/sbin/ls > /tmp/client.out")**

3. **close()** the connection

Meanwhile, the server is handling the data and executing it:

1. **accept()** the connection from the client

2. **recv(str)** the command string

3. **close()** the connection

4. **system(str)** to run the command

Beware! Having the server execute what the client says is like giving remote shell access and people can do things to your account when they connect to the server. For instance, in the above example, what if the client sends "**rm -rf ~**" It deletes everything in your account, that s what

So you get wise, and you prevent the client from using any except for a couple utilities that you know are safe, like the **foobar** utility:

```
if (!strncmp(str, "foobar", 6)) {
    sprintf(sysstr, "%s > /tmp/server.out", str);
    system(sysstr);
}
```

But you re still unsafe, unfortunately: what if the client enters "**foobar; rm -rf ~**" The safest thing to do is to write a little routine that puts an escape "\" character in front of all non-alphanumeric characters including spaces, if appropriate in the argument for the command.

As you can see, security is a pretty big issue when the server starts executing things the client sends.

I'm sending a slew of data, but when I `recv()`, it only receives 536 bytes or 1460 bytes at a time. But if I run it on my local machine, it receives all the data at the same time. What's going on?

ou re hitting the MTU the maximum size the physical medium can handle. On the local machine, you re using the loopback device which can handle K or more no problem. But on thernet, which can only handle 1500 bytes with a header, you hit that limit. Over a modem, with 5   MTU again, with header , you hit the even lower limit.

ou have to make sure all the data is being sent, first of all. See the **sendall()** function implementation for details. Once you re sure of that, then you need to call **recv()** in a loop until all your data is read.

Read the section Son of Data ncapsulation for details on receiving complete packets of data using multiple calls to **recv()**.

I'm on a Windows box and I don't have the `fork()` system call or any kind of `struct sigaction`. What to do?

If they re anywhere, they ll be in POSIX libraries that may have shipped with your compiler. Since I don t have a Windows box, I really can t tell you the answer, but I seem to remember that Microsoft has a POSIX compatibility layer and that s where **fork()** would be. And maybe even `sigaction`.

Search the help that came with C for "fork" or "POSIX" and see if it gives you any clues.

If that doesn t work at all, ditch the **fork()**/`sigaction` stuff and replace it with the Win32 e uivalent: **CreateProcess()**. I don t know how to use **CreateProcess()** it takes a bazillion arguments, but it should be covered in the docs that came with C .

I'm behind a firewall—how do I let people outside the firewall know my IP address so they can connect to my machine?

Unfortunately, the purpose of a firewall is to prevent people outside the firewall from connecting to machines inside the firewall, so allowing them to do so is basically considered a breach of security.

This isn t to say that all is lost. For one thing, you can still often **connect()** through the firewall if it s doing some kind of mas uerading or NAT or something like that. Just design your programs so that you re always the one initiating the connection, and you ll be fine.

If that s not satisfactory, you can ask your sysadmins to poke a hole in the firewall so that people can connect to you. The firewall can forward to you either through it s NAT software, or through a proxy or something like that.

Be aware that a hole in the firewall is nothing to be taken lightly.   ou have to make sure you don t give bad people access to the internal network if you re a beginner, it s a lot harder to make software secure than you might imagine.

Don t make your sysadmin mad at me. `;-)`

How do I write a packet sniffer? How do I put my Ethernet interface into promiscuous mode?

For those not in the know, when a network card is in "promiscuous mode", it will forward ALL packets to the operating system, not just those that were addressed to this particular machine. We re talking   thernet-layer addresses here, not IP addresses--but since ethernet is lower-layer than IP, all IP addresses are effectively forwarded as well. See the section Low Level Nonsense and Network Theory for more info.

This is the basis for how a packet sniffer works. It puts the interface into promiscuous mode, then the OS gets every single packet that goes by on the wire.   ou ll have a socket of some type that you can read this data from.

Unfortunately, the answer to the   uestion varies depending on the platform, but if you Google for, for instance, "windows promiscuous ioctl" you ll probably get somewhere. There s what looks like a decent writeup in Linux Journal[40], as well.

How can I set a custom timeout value for a TCP or UDP socket?

It depends on your system.   ou might search the net for `SO_RCVTIMEO` and `SO_SNDTIMEO` for use with **setsockopt()** to see if your system supports such functionality.

The Linux man page suggests using **alarm()** or **setitimer()** as a substitute.

How can I tell which ports are available to use? Is there a list of "official" port numbers?

Usually this isn t an issue. If you re writing, say, a web server, then it s a good idea to use the well-known port   0 for your software. If you re writing just your own specialized server, then choose a port at random but greater than 1023 and give it a try.

If the port is already in use, you ll get an "Address already in use" error when you try to **bind()**. Choose another port. It s a good idea to allow the user of your software to specify an alternate port either with a config file or a command line switch.

There is a list of official port numbers[41] maintained by the Internet Assigned Numbers Authority IANA . Just because something over 1023 is in that list doesn t mean you can t use the port. For instance, Id Software s DOOM uses the same port as "md s", whatever that is. All that matters is that no one else *on the same machine* is using that port when you want to use it.

40. `http://interactive.linuxjournal.com/article/4659`
41. `http://www.iana.org/assignments/port-numbers`

9. Man Pages

In the Unix world, there are a lot of manuals. They have little sections that describe individual functions that you have at your disposal.

Of course, **manual** would be too much of a thing to type. I mean, no one in the Unix world, including myself, likes to type that much. Indeed I could go on and on at great length about how much I prefer to be terse but instead I shall be brief and not bore you with long-winded diatribes about how utterly amazingly brief I prefer to be in virtually all circumstances in their entirety.

[Applause]

Thank you. What I am getting at is that these pages are called "man pages" in the Unix world, and I have included my own personal truncated variant here for your reading enjoyment. The thing is, many of these functions are way more general purpose than I m letting on, but I m only going to present the parts that are relevant for Internet Sockets Programming.

But wait That s not all that s wrong with my man pages:

They are incomplete and only show the basics from the guide.

There are many more man pages than this in the real world.

They are different than the ones on your system.

The header files might be different for certain functions on your system.

The function parameters might be different for certain functions on your system.

If you want the real information, check your local Unix man pages by typing **man whatever**, where "whatever" is something that you re incredibly interested in, such as "`accept`". I m sure Microsoft isual Studio has something similar in their help section. But "man" is better because it is one byte more concise than "help". Unix wins again

So, if these are so flawed, why even include them at all in the Guide Well, there are a few reasons, but the best are that a these versions are geared specifically toward network programming and are easier to digest than the real ones, and b these versions contain examples

Oh And speaking of the examples, I don t tend to put in all the error checking because it really increases the length of the code. But you should absolutely do error checking pretty much any time you make any of the system calls unless you re totally 100% sure it s not going to fail, and you should probably do it even then

9.1. `accept()`

Accept an incoming connection on a listening socket

Prototypes

```
#include <sys/types.h>
#include <sys/socket.h>

int accept(int s, struct sockaddr *addr, socklen_t *addrlen);
```

Description

Once you ve gone through the trouble of getting a SOCK_STREAM socket and setting it up for incoming connections with **listen()**, then you call **accept()** to actually get yourself a new socket descriptor to use for subse uent communication with the newly connected client.

The old socket that you are using for listening is still there, and will be used for further **accept()** calls as they come in.

s	The **listen()**ing socket descriptor.
addr	This is filled in with the address of the site that s connecting to you.
addrlen	This is filled in with the **sizeof()** the structure returned in the *addr* parameter. ou can safely ignore it if you assume you re getting a struct sockaddr_in back, which you know you are, because that s the type you passed in for *addr*.

accept() will normally block, and you can use **select()** to peek on the listening socket descriptor ahead of time to see if it s "ready to read". If so, then there s a new connection waiting to be **accept()**ed   ay Alternatively, you could set the O_NONBLOCK flag on the listening socket using **fcntl()**, and then it will never block, choosing instead to return -1 with *errno* set to EWOULDBLOCK.

The socket descriptor returned by **accept()** is a bona fide socket descriptor, open and connected to the remote host.   ou have to **close()** it when you re done with it.

Return Value

accept() returns the newly connected socket descriptor, or -1 on error, with *errno* set appropriately.

Example

```
struct sockaddr_storage their_addr;
socklen_t addr_size;
struct addrinfo hints, *res;
int sockfd, new_fd;

// first, load up address structs with getaddrinfo():

memset(&hints, 0, sizeof hints);
hints.ai_family = AF_UNSPEC;  // use IPv4 or IPv6, whichever
hints.ai_socktype = SOCK_STREAM;
hints.ai_flags = AI_PASSIVE;     // fill in my IP for me

getaddrinfo(NULL, MYPORT, &hints, &res);

// make a socket, bind it, and listen on it:

sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
bind(sockfd, res->ai_addr, res->ai_addrlen);
listen(sockfd, BACKLOG);

// now accept an incoming connection:

addr_size = sizeof their_addr;
new_fd = accept(sockfd, (struct sockaddr *)&their_addr, &addr_size);
```

```
// ready to communicate on socket descriptor new_fd!
```

See Also

socket(), **getaddrinfo()**, **listen()**, struct sockaddr_in

9.2. `bind()`

Associate a socket with an IP address and port number

Prototypes

```
#include <sys/types.h>
#include <sys/socket.h>

int bind(int sockfd, struct sockaddr *my_addr, socklen_t addrlen);
```

Description

When a remote machine wants to connect to your server program, it needs two pieces of information: the IP address and the port number. The **bind()** call allows you to do just that.

First, you call **getaddrinfo()** to load up a **struct sockaddr** with the destination address and port information. Then you call **socket()** to get a socket descriptor, and then you pass the socket and address into **bind()**, and the IP address and port are magically using actual magic bound to the socket

If you don t know your IP address, or you know you only have one IP address on the machine, or you don t care which of the machine s IP addresses is used, you can simply pass the AI_PASSIVE flag in the *hints* parameter to **getaddrinfo()**. What this does is fill in the IP address part of the **struct sockaddr** with a special value that tells **bind()** that it should automatically fill in this host s IP address.

What what What special value is loaded into the **struct sockaddr** s IP address to cause it to auto-fill the address with the current host I ll tell you, but keep in mind this is only if you re filling out the struct sockaddr by hand if not, use the results from **getaddrinfo()**, as per above. In IPv4, the *sin_addr.s_addr* field of the struct sockaddr_in structure is set to INADDR_ANY. In IPv , the *sin6_addr* field of the struct sockaddr_in6 structure is assigned into from the global variable *in6addr_any*. Or, if you re declaring a new struct in6_addr, you can initialize it to IN6ADDR_ANY_INIT.

Lastly, the *addrlen* parameter should be set to sizeof my_addr.

Return Value

Returns zero on success, or -1 on error and **errno** will be set accordingly.

Example

```
// modern way of doing things with getaddrinfo()

struct addrinfo hints, *res;
int sockfd;

// first, load up address structs with getaddrinfo():

memset(&hints, 0, sizeof hints);
hints.ai_family = AF_UNSPEC;  // use IPv4 or IPv6, whichever
hints.ai_socktype = SOCK_STREAM;
hints.ai_flags = AI_PASSIVE;     // fill in my IP for me

getaddrinfo(NULL, "3490", &hints, &res);

// make a socket:
// (you should actually walk the "res" linked list and error-check!)

sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);

// bind it to the port we passed in to getaddrinfo():

bind(sockfd, res->ai_addr, res->ai_addrlen);
```

```
// example of packing a struct by hand, IPv4

struct sockaddr_in myaddr;
int s;
```

```
myaddr.sin_family = AF_INET;
myaddr.sin_port = htons(3490);

// you can specify an IP address:
inet_pton(AF_INET, "63.161.169.137", &myaddr.sin_addr.s_addr);

// or you can let it automatically select one:
myaddr.sin_addr.s_addr = INADDR_ANY;

s = socket(PF_INET, SOCK_STREAM, 0);
bind(s, (struct sockaddr*)&myaddr, sizeof myaddr);
```

See Also

 getaddrinfo(), **socket()**, struct sockaddr_in, struct in_addr

9.3. `connect()`

Connect a socket to a server

Prototypes

```
#include <sys/types.h>
#include <sys/socket.h>

int connect(int sockfd, const struct sockaddr *serv_addr,
            socklen_t addrlen);
```

Description

Once you ve built a socket descriptor with the **socket()** call, you can **connect()** that socket to a remote server using the well-named **connect()** system call. All you need to do is pass it the socket descriptor and the address of the server you re interested in getting to know better. Oh, and the length of the address, which is commonly passed to functions like this.

Usually this information comes along as the result of a call to **getaddrinfo()**, but you can fill out your own struct sockaddr if you want to.

If you haven t yet called **bind()** on the socket descriptor, it is automatically bound to your IP address and a random local port. This is usually just fine with you if you re not a server, since you really don t care what your local port is you only care what the remote port is so you can put it in the *serv_addr* parameter.   ou *can* call **bind()** if you really want your client socket to be on a specific IP address and port, but this is pretty rare.

Once the socket is **connect()**ed, you re free to **send()** and **recv()** data on it to your heart s content.

Special note: if you **connect()** a SOCK_DGRAM UDP socket to a remote host, you can use **send()** and **recv()** as well as **sendto()** and **recvfrom()**. If you want.

Return Value

Returns zero on success, or -1 on error and **errno** will be set accordingly.

Example

```
// connect to www.example.com port 80 (http)

struct addrinfo hints, *res;
int sockfd;

// first, load up address structs with getaddrinfo():

memset(&hints, 0, sizeof hints);
hints.ai_family = AF_UNSPEC;  // use IPv4 or IPv6, whichever
hints.ai_socktype = SOCK_STREAM;

// we could put "80" instead on "http" on the next line:
getaddrinfo("www.example.com", "http", &hints, &res);

// make a socket:

sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);

// connect it to the address and port we passed in to getaddrinfo():

connect(sockfd, res->ai_addr, res->ai_addrlen);
```

See Also

socket(), **bind()**

9.4. `close()`

Close a socket descriptor

Prototypes

```
#include <unistd.h>

int close(int s);
```

Description

After you ve finished using the socket for whatever demented scheme you have concocted and you don t want to **send()** or **recv()** or, indeed, do *anything else* at all with the socket, you can **close()** it, and it ll be freed up, never to be used again.

The remote side can tell if this happens one of two ways. One: if the remote side calls **recv()**, it will return 0. Two: if the remote side calls **send()**, it ll receive a signal SIGPIPE and send will return -1 and *errno* will be set to EPIPE.

Windows users: the function you need to use is called **closesocket()**, not **close()**. If you try to use **close()** on a socket descriptor, it s possible Windows will get angry... And you wouldn t like it when it s angry.

Return Value

Returns zero on success, or -1 on error and **errno** will be set accordingly.

Example

```
s = socket(PF_INET, SOCK_DGRAM, 0);
.
.
.
// a whole lotta stuff...*BRRRONNNN!*
.
.
.
close(s);  // not much to it, really.
```

See Also

socket(), **shutdown()**

9.5. `getaddrinfo()`, `freeaddrinfo()`, `gai_strerror()`

Get information about a host name and/or service and load up a `struct sockaddr` with the result.

Prototypes

```
#include <sys/types.h>
#include <sys/socket.h>
#include <netdb.h>

int getaddrinfo(const char *nodename, const char *servname,
                const struct addrinfo *hints, struct addrinfo **res);

void freeaddrinfo(struct addrinfo *ai);

const char *gai_strerror(int ecode);

struct addrinfo {
  int      ai_flags;          // AI_PASSIVE, AI_CANONNAME, ...
  int      ai_family;         // AF_xxx
  int      ai_socktype;       // SOCK_xxx
  int      ai_protocol;       // 0 (auto) or IPPROTO_TCP, IPPROTO_UDP

  socklen_t  ai_addrlen;      // length of ai_addr
  char    *ai_canonname;      // canonical name for nodename
  struct sockaddr  *ai_addr;  // binary address
  struct addrinfo  *ai_next;  // next structure in linked list
};
```

Description

   `getaddrinfo()` is an excellent function that will return information on a particular host name such as its IP address and load up a `struct sockaddr` for you, taking care of the gritty details like if it s IPv4 or IPv . It replaces the old functions **gethostbyname()** and **getservbyname()**. The description, below, contains a lot of information that might be a little daunting, but actual usage is pretty simple. It might be worth it to check out the examples first.

   The host name that you re interested in goes in the *nodename* parameter. The address can be either a host name, like "www.example.com", or an IPv4 or IPv address passed as a string . This parameter can also be `NULL` if you re using the `AI_PASSIVE` flag see below.

   The *servname* parameter is basically the port number. It can be a port number passed as a string, like " 0" , or it can be a service name, like "http" or "tftp" or "smtp" or "pop", etc. Well-known service names can be found in the IANA Port List[42] or in your */etc/services* file.

   Lastly, for input parameters, we have *hints*. This is really where you get to define what the **getaddinfo()** function is going to do. ero the whole structure before use with **memset()**. Let s take a ook at the fields you need to set up before use.

   The *ai_flags* can be set to a variety of things, but here are a couple important ones. Multiple flags can be specified by bitwise-ORing them together with the **|** operator. Check your man page for the complete list of flags.

   `AI_CANONNAME` causes the *ai_canonname* of the result to the filled out with the host s canonical real name. `AI_PASSIVE` causes the result s IP address to be filled out with `INADDR_ANY` IPv4 or *in6addr_any* IPv   this causes a subse uent call to **bind()** to auto-fill the IP address of the `struct sockaddr` with the address of the current host. That s excellent for setting up a server when you don t want to hardcode the address.

   If you do use the `AI_PASSIVE`, flag, then you can pass `NULL` in the *nodename* since **bind()** will fill it in for you later.

---

42. `http://www.iana.org/assignments/port-numbers`

Continuing on with the input paramters, you ll likely want to set *ai_family* to AF_UNSPEC which tells **getaddrinfo()** to look for both IPv4 and IPv addresses.   ou can also restrict yourself to one or the other with AF_INET or AF_INET6.

Next, the *socktype* field should be set to SOCK_STREAM or SOCK_DGRAM, depending on which type of socket you want.

Finally, just leave *ai_protocol* at 0 to automatically choose your protocol type.

Now, after you get all that stuff in there, you can *finally* make the call to **getaddrinfo()**

Of course, this is where the fun begins. The *res* will now point to a linked list of struct addrinfos, and you can go through this list to get all the addresses that match what you passed in with the hints.

Now, it s possible to get some addresses that don t work for one reason or another, so what the Linux man page does is loops through the list doing a call to **socket()** and **connect()** or **bind()** if you re setting up a server with the AI_PASSIVE flag until it succeeds.

Finally, when you re done with the linked list, you need to call **freeaddrinfo()** to free up the memory or it will be leaked, and Some People will get upset.

Return Value

Returns zero on success, or nonzero on error. If it returns nonzero, you can use the function **gai_strerror()** to get a printable version of the error code in the return value.

Example

```
// code for a client connecting to a server
// namely a stream socket to www.example.com on port 80 (http)
// either IPv4 or IPv6

int sockfd;
struct addrinfo hints, *servinfo, *p;
int rv;

memset(&hints, 0, sizeof hints);
hints.ai_family = AF_UNSPEC; // use AF_INET6 to force IPv6
hints.ai_socktype = SOCK_STREAM;

if ((rv = getaddrinfo("www.example.com", "http", &hints, &servinfo)) != 0) {
    fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(rv));
    exit(1);
}

// loop through all the results and connect to the first we can
for(p = servinfo; p != NULL; p = p->ai_next) {
    if ((sockfd = socket(p->ai_family, p->ai_socktype,
            p->ai_protocol)) == -1) {
        perror("socket");
        continue;
    }

    if (connect(sockfd, p->ai_addr, p->ai_addrlen) == -1) {
        close(sockfd);
        perror("connect");
        continue;
    }

    break; // if we get here, we must have connected successfully
}

if (p == NULL) {
    // looped off the end of the list with no connection
    fprintf(stderr, "failed to connect\n");
    exit(2);
}

freeaddrinfo(servinfo); // all done with this structure
```

```
// code for a server waiting for connections
// namely a stream socket on port 3490, on this host's IP
// either IPv4 or IPv6.

int sockfd;
struct addrinfo hints, *servinfo, *p;
int rv;

memset(&hints, 0, sizeof hints);
hints.ai_family = AF_UNSPEC; // use AF_INET6 to force IPv6
hints.ai_socktype = SOCK_STREAM;
hints.ai_flags = AI_PASSIVE; // use my IP address

if ((rv = getaddrinfo(NULL, "3490", &hints, &servinfo)) != 0) {
    fprintf(stderr, "getaddrinfo: %s\n", gai_strerror(rv));
    exit(1);
}

// loop through all the results and bind to the first we can
for(p = servinfo; p != NULL; p = p->ai_next) {
    if ((sockfd = socket(p->ai_family, p->ai_socktype,
            p->ai_protocol)) == -1) {
        perror("socket");
        continue;
    }

    if (bind(sockfd, p->ai_addr, p->ai_addrlen) == -1) {
        close(sockfd);
        perror("bind");
        continue;
    }

    break; // if we get here, we must have connected successfully
}

if (p == NULL) {
    // looped off the end of the list with no successful bind
    fprintf(stderr, "failed to bind socket\n");
    exit(2);
}

freeaddrinfo(servinfo); // all done with this structure
```

See Also

gethostbyname(), **getnameinfo()**

9.6. `gethostname()`

Returns the name of the system

Prototypes

```
#include <sys/unistd.h>

int gethostname(char *name, size_t len);
```

Description

our system has a name. They all do. This is a slightly more Unixy thing than the rest of the networky stuff we ve been talking about, but it still has its uses.

For instance, you can get your host name, and then call **gethostbyname()** to find out your IP address.

The parameter *name* should point to a buffer that will hold the host name, and *len* is the size of that buffer in bytes. **gethostname()** won t overwrite the end of the buffer it might return an error, or it might just stop writing , and it will NUL-terminate the string if there s room for it in the buffer.

Return Value

Returns zero on success, or `-1` on error and **errno** will be set accordingly.

Example

```
char hostname[128];

gethostname(hostname, sizeof hostname);
printf("My hostname: %s\n", hostname);
```

See Also

gethostbyname()

9.7. `gethostbyname(), gethostbyaddr()`

Get an IP address for a hostname, or vice-versa

Prototypes

```
#include <sys/socket.h>
#include <netdb.h>

struct hostent *gethostbyname(const char *name); // DEPRECATED!
struct hostent *gethostbyaddr(const char *addr, int len, int type);
```

Description

PLEASE NOTE: these two functions are superseded by **getaddrinfo()** and **getnameinfo()**! In particular, **gethostbyname()** doesn't work well with IPv.

These functions map back and forth between host names and IP addresses. For instance, if you have "www.example.com", you can use **gethostbyname()** to get its IP address and store it in a `struct in_addr`.

Conversely, if you have a `struct in_addr` or a `struct in6_addr`, you can use **gethostbyaddr()** to get the hostname back. **gethostbyaddr()** *is* IPv compatible, but you should use the newer shinier **getnameinfo()** instead.

If you have a string containing an IP address in dots-and-numbers format that you want to look up the hostname of, you d be better off using **getaddrinfo()** with the `AI_CANONNAME` flag.

gethostbyname() takes a string like "www.yahoo.com", and returns a `struct hostent` which contains tons of information, including the IP address. Other information is the official host name, a list of aliases, the address type, the length of the addresses, and the list of addresses it s a general-purpose structure that s pretty easy to use for our specific purposes once you see how.

gethostbyaddr() takes a `struct in_addr` or `struct in6_addr` and brings you up a corresponding host name if there is one , so it s sort of the reverse of **gethostbyname()**. As for parameters, even though *addr* is a `char*`, you actually want to pass in a pointer to a `struct in_addr`. *len* should be `sizeof(struct in_addr)`, and *type* should be `AF_INET`.

So what is this `struct hostent` that gets returned It has a number of fields that contain information about the host in uestion.

`char *h_name`	The real canonical host name.
`char **h_aliases`	A list of aliases that can be accessed with arrays the last element is `NULL`
`int h_addrtype`	The result s address type, which really should be `AF_INET` for our purposes.
`int length`	The length of the addresses in bytes, which is 4 for IP version 4 addresses.
`char **h_addr_list`	A list of IP addresses for this host. Although this is a `char**`, it s really an array of `struct in_addr*`s in disguise. The last array element is `NULL`.
`h_addr`	A commonly defined alias for `h_addr_list[0]`. If you just want any old IP address for this host yeah, they can have more than one just use this field.

Return Value

Returns a pointer to a resultant `struct hostent` or success, or `NULL` on error.

Instead of the normal **perror()** and all that stuff you d normally use for error reporting, these functions have parallel results in the variable *h_errno*, which can be printed using the functions **herror()** or **hstrerror()**. These work just like the classic *errno*, **perror()**, and **strerror()** functions you re used to.

Example

```
// THIS IS A DEPRECATED METHOD OF GETTING HOST NAMES
// use getaddrinfo() instead!

#include <stdio.h>
#include <errno.h>
#include <netdb.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <arpa/inet.h>

int main(int argc, char *argv[])
{
    int i;
    struct hostent *he;
    struct in_addr **addr_list;

    if (argc != 2) {
        fprintf(stderr,"usage: ghbn hostname\n");
        return 1;
    }

    if ((he = gethostbyname(argv[1])) == NULL) {  // get the host info
        herror("gethostbyname");
        return 2;
    }

    // print information about this host:
    printf("Official name is: %s\n", he->h_name);
    printf("    IP addresses: ");
    addr_list = (struct in_addr **)he->h_addr_list;
    for(i = 0; addr_list[i] != NULL; i++) {
        printf("%s ", inet_ntoa(*addr_list[i]));
    }
    printf("\n");

    return 0;
}
```

```
// THIS HAS BEEN SUPERCEDED
// use getnameinfo() instead!

struct hostent *he;
struct in_addr ipv4addr;
struct in6_addr ipv6addr;

inet_pton(AF_INET, "192.0.2.34", &ipv4addr);
he = gethostbyaddr(&ipv4addr, sizeof ipv4addr, AF_INET);
printf("Host name: %s\n", he->h_name);

inet_pton(AF_INET6, "2001:db8:63b3:1::beef", &ipv6addr);
he = gethostbyaddr(&ipv6addr, sizeof ipv6addr, AF_INET6);
printf("Host name: %s\n", he->h_name);
```

See Also

getaddrinfo(), **getnameinfo()**, **gethostname()**, *errno*, **perror()**, **strerror()**, struct in_addr

9.8. `getnameinfo()`

Look up the host name and service name information for a given `struct sockaddr`.

Prototypes

```
#include <sys/socket.h>
#include <netdb.h>

int getnameinfo(const struct sockaddr *sa, socklen_t salen,
                char *host, size_t hostlen,
                char *serv, size_t servlen, int flags);
```

Description

This function is the opposite of **`getaddrinfo()`**, that is, this function takes an already loaded `struct sockaddr` and does a name and service name lookup on it. It replaces the old **`gethostbyaddr()`** and **`getservbyport()`** functions.

ou have to pass in a pointer to a `struct sockaddr` which in actuality is probably a `struct sockaddr_in` or `struct sockaddr_in6` that you ve cast in the *sa* parameter, and the length of that `struct` in the *salen*.

The resultant host name and service name will be written to the area pointed to by the *host* and *serv* parameters. Of course, you have to specify the max lengths of these buffers in *hostlen* and *servlen*.

Finally, there are several flags you can pass, but here a a couple good ones. `NI_NOFQDN` will cause the *host* to only contain the host name, not the whole domain name. `NI_NAMEREQD` will cause the function to fail if the name cannot be found with a DNS lookup if you don t specify this flag and the name can t be found, **`getnameinfo()`** will put a string version of the IP address in *host* instead.

As always, check your local man pages for the full scoop.

Return Value

Returns zero on success, or non-zero on error. If the return value is non-zero, it can be passed to **`gai_strerror()`** to get a human-readable string. See **`getaddrinfo`** for more information.

Example

```
struct sockaddr_in6 sa; // could be IPv4 if you want
char host[1024];
char service[20];

// pretend sa is full of good information about the host and port...

getnameinfo(&sa, sizeof sa, host, sizeof host, service, sizeof service, 0);

printf("  host: %s\n", host);    // e.g. "www.example.com"
printf("service: %s\n", service); // e.g. "http"
```

See Also

   `getaddrinfo()`, **`gethostbyaddr()`**

9.9. `getpeername()`

Return address info about the remote side of the connection

Prototypes

```
#include <sys/socket.h>

int getpeername(int s, struct sockaddr *addr, socklen_t *len);
```

Description

Once you have either **accept()**ed a remote connection, or **connect()**ed to a server, you now have what is known as a *peer*. our peer is simply the computer you re connected to, identified by an IP address and a port. So...

getpeername() simply returns a struct sockaddr_in filled with information about the machine you re connected to.

Why is it called a "name" Well, there are a lot of different kinds of sockets, not just Internet Sockets like we re using in this guide, and so "name" was a nice generic term that covered all cases. In our case, though, the peer s "name" is it s IP address and port.

Although the function returns the size of the resultant address in *len*, you must preload *len* with the size of *addr*.

Return Value

Returns zero on success, or -1 on error and **errno** will be set accordingly.

Example

```
// assume s is a connected socket

socklen_t len;
struct sockaddr_storage addr;
char ipstr[INET6_ADDRSTRLEN];
int port;

len = sizeof addr;
getpeername(s, (struct sockaddr*)&addr, &len);

// deal with both IPv4 and IPv6:
if (addr.ss_family == AF_INET) {
    struct sockaddr_in *s = (struct sockaddr_in *)&addr;
    port = ntohs(s->sin_port);
    inet_ntop(AF_INET, &s->sin_addr, ipstr, sizeof ipstr);
} else { // AF_INET6
    struct sockaddr_in6 *s = (struct sockaddr_in6 *)&addr;
    port = ntohs(s->sin6_port);
    inet_ntop(AF_INET6, &s->sin6_addr, ipstr, sizeof ipstr);
}

printf("Peer IP address: %s\n", ipstr);
printf("Peer port      : %d\n", port);
```

See Also

gethostname(), **gethostbyname()**, **gethostbyaddr()**

9.10.

Holds the error code for the last system call

Prototypes

```
#include <errno.h>

int errno;
```

Description

    This is the variable that holds error information for a lot of system calls. If you ll recall, things like **socket()** and **listen()** return -1 on error, and they set the exact value of *errno* to let you know specifically which error occurred.

    The header file *errno.h* lists a bunch of constant symbolic names for errors, such as EADDRINUSE, EPIPE, ECONNREFUSED, etc. our local man pages will tell you what codes can be returned as an error, and you can use these at run time to handle different errors in different ways.

    Or, more commonly, you can call **perror()** or **strerror()** to get a human-readable version of the error.

    One thing to note, for you multithreading enthusiasts, is that on most systems *errno* is defined in a threadsafe manner. That is, it s not actually a global variable, but it behaves just like a global variable would in a single-threaded environment.

Return Value

    The value of the variable is the latest error to have transpired, which might be the code for "success" if the last action succeeded.

Example

```
s = socket(PF_INET, SOCK_STREAM, 0);
if (s == -1) {
    perror("socket"); // or use strerror()
}

tryagain:
if (select(n, &readfds, NULL, NULL) == -1) {
    // an error has occurred!!

    // if we were only interrupted, just restart the select() call:
    if (errno == EINTR) goto tryagain;  // AAAA!  goto!!!

    // otherwise it's a more serious error:
    perror("select");
    exit(1);
}
```

See Also

    perror(), **strerror()**

9.11. `fcntl()`

Control socket descriptors

Prototypes

```
#include <sys/unistd.h>
#include <sys/fcntl.h>

int fcntl(int s, int cmd, long arg);
```

Description

This function is typically used to do file locking and other file-oriented stuff, but it also has a couple socket-related functions that you might see or use from time to time.

Parameter *s* is the socket descriptor you wish to operate on, *cmd* should be set to F_SETFL, and *arg* can be one of the following commands. Like I said, there s more to **fcntl()** than I m letting on here, but I m trying to stay socket-oriented.

O_NONBLOCK	Set the socket to be non-blocking. See the section on blocking for more details.
O_ASYNC	Set the socket to do asynchronous I/O. When data is ready to be **recv()** d on the socket, the signal SIGIO will be raised. This is rare to see, and beyond the scope of the guide. And I think it s only available on certain systems.

Return Value

Returns zero on success, or -1 on error and **errno** will be set accordingly.

Different uses of the **fcntl()** system call actually have different return values, but I haven t covered them here because they re not socket-related. See your local **fcntl()** man page for more information.

Example

```
int s = socket(PF_INET, SOCK_STREAM, 0);

fcntl(s, F_SETFL, O_NONBLOCK);  // set to non-blocking
fcntl(s, F_SETFL, O_ASYNC);     // set to asynchronous I/O
```

See Also

Blocking, **send()**

9.12. `htons()`, `htonl()`, `ntohs()`, `ntohl()`

Convert multi-byte integer types from host byte order to network byte order

Prototypes

```
#include <netinet/in.h>

uint32_t htonl(uint32_t hostlong);
uint16_t htons(uint16_t hostshort);
uint32_t ntohl(uint32_t netlong);
uint16_t ntohs(uint16_t netshort);
```

Description

Just to make you really unhappy, different computers use different byte orderings internally for their multibyte integers i.e. any integer that s larger than a `char`. The upshot of this is that if you **send()** a two-byte `short int` from an Intel box to a Mac before they became Intel boxes, too, I mean , what one computer thinks is the number `1`, the other will think s the number `256`, and vice-versa.

The way to get around this problem is for everyone to put aside their differences and agree that Motorola and IBM had it right, and Intel did it the weird way, and so we all convert our byte orderings to "big-endian" before sending them out. Since Intel s a "little-endian" machine, it s far more politically correct to call our preferred byte ordering "Network Byte Order". So these functions convert from your native byte order to network byte order and back again.

This means on Intel these functions swap all the bytes around, and on PowerPC they do nothing because the bytes are already in Network Byte Order. But you should always use them in your code anyway, since someone might want to build it on an Intel machine and still have things work properly.

Note that the types involved are 32-bit 4 byte, probably `int` and 1 -bit 2 byte, very likely `short` numbers. 4-bit machines might have a **htonll()** for 4-bit `int`s, but I ve not seen it.   ou ll just have to write your own.

Anyway, the way these functions work is that you first decide if you re converting *from* host your machine s byte order or from network byte order. If "host", the the first letter of the function you re going to call is "h". Otherwise it s "n" for "network". The middle of the function name is always "to" because you re converting from one "to" another, and the penultimate letter shows what you re converting *to*. The last letter is the size of the data, "s" for short, or "l" for long. Thus:

htons()	**h**ost **to n**etwork **s**hort
htonl()	**h**ost **to n**etwork **l**ong
ntohs()	**n**etwork **to h**ost **s**hort
ntohl()	**n**etwork **to h**ost **l**ong

Return Value

ach function returns the converted value.

Example

```
uint32_t some_long = 10;
uint16_t some_short = 20;

uint32_t network_byte_order;

// convert and send
network_byte_order = htonl(some_long);
send(s, &network_byte_order, sizeof(uint32_t), 0);

some_short == ntohs(htons(some_short)); // this expression is true
```

9.13. `inet_ntoa()`, `inet_aton()`, `inet_addr`

Convert IP addresses from a dots-and-number string to a `struct in_addr` and back

Prototypes

```
#include <sys/socket.h>
#include <netinet/in.h>
#include <arpa/inet.h>

// ALL THESE ARE DEPRECATED!  Use inet_pton()  or inet_ntop() instead!!

char *inet_ntoa(struct in_addr in);
int inet_aton(const char *cp, struct in_addr *inp);
in_addr_t inet_addr(const char *cp);
```

Description

*These functions are deprecated because they don't handle IPv6! Use **inet_ntop()** or **inet_pton()** instead! They are included here because they can still be found in the wild.*

All of these functions convert from a `struct in_addr` part of your `struct sockaddr_in`, most likely to a string in dots-and-numbers format e.g. "192.1 .5.10" and vice-versa. If you have an IP address passed on the command line or something, this is the easiest way to get a `struct in_addr` to **connect()** to, or whatever. If you need more power, try some of the DNS functions like **gethostbyname()** or attempt a *coup d'État* in your local country.

The function **inet_ntoa()** converts a network address in a `struct in_addr` to a dots-and-numbers format string. The "n" in "ntoa" stands for network, and the "a" stands for ASCII for historical reasons so it s "Network To ASCII"   the "toa" suffix has an analogous friend in the C library called **atoi()** which converts an ASCII string to an integer.

The function **inet_aton()** is the opposite, converting from a dots-and-numbers string into a `in_addr_t` which is the type of the field `s_addr` in your `struct in_addr`.

Finally, the function **inet_addr()** is an older function that does basically the same thing as **inet_aton()**. It s theoretically deprecated, but you ll see it a lot and the police won t come get you if you use it.

Return Value

inet_aton() returns non-zero if the address is a valid one, and it returns zero if the address is invalid.

inet_ntoa() returns the dots-and-numbers string in a static buffer that is overwritten with each call to the function.

inet_addr() returns the address as an `in_addr_t`, or `-1` if there s an error. That is the same result as if you tried to convert the string "255.255.255.255", which is a valid IP address. This is why **inet_aton()** is better.

Example

```
struct sockaddr_in antelope;
char *some_addr;

inet_aton("10.0.0.1", &antelope.sin_addr); // store IP in antelope

some_addr = inet_ntoa(antelope.sin_addr); // return the IP
printf("%s\n", some_addr); // prints "10.0.0.1"

// and this call is the same as the inet_aton() call, above:
antelope.sin_addr.s_addr = inet_addr("10.0.0.1");
```

See Also

inet_ntop(), **inet_pton()**, **gethostbyname()**, **gethostbyaddr()**

9.14. `inet_ntop()`, `inet_pton()`

Convert IP addresses to human-readable form and back.

Prototypes

```
#include <arpa/inet.h>

const char *inet_ntop(int af, const void *src,
                      char *dst, socklen_t size);

int inet_pton(int af, const char *src, void *dst);
```

Description

These functions are for dealing with human-readable IP addresses and converting them to their binary representation for use with various functions and system calls. The "n" stands for "network", and "p" for "presentation". Or "text presentation". But you can think of it as "printable". "ntop" is "network to printable". See

Sometimes you don t want to look at a pile of binary numbers when looking at an IP address. ou want it in a nice printable form, like `192.0.2.180`, or `2001:db8:8714:3a90::12`. In that case, **`inet_ntop()`** is for you.

`inet_ntop()` takes the address family in the *af* parameter either AF_INET or AF_INET6 . The *src* parameter should be a pointer to either a `struct in_addr` or `struct in6_addr` containing the address you wish to convert to a string. Finally *dst* and *size* are the pointer to the destination string and the maximum length of that string.

What should the maximum length of the *dst* string be What is the maximum length for IPv4 and IPv addresses Fortunately there are a couple of macros to help you out. The maximum lengths are: `INET_ADDRSTRLEN` and `INET6_ADDRSTRLEN`.

Other times, you might have a string containing an IP address in readable form, and you want to pack it into a `struct sockaddr_in` or a `struct sockaddr_in6`. In that case, the opposite funcion **`inet_pton()`** is what you re after.

`inet_pton()` also takes an address family either AF_INET or AF_INET6 in the *af* parameter. The *src* parameter is a pointer to a string containing the IP address in printable form. Lastly the *dst* parameter points to where the result should be stored, which is probably a `struct in_addr` or `struct in6_addr`.

These functions don t do DNS lookups you ll need **`getaddinfo()`** for that.

Return Value

`inet_ntop()` returns the *dst* parameter on success, or `NULL` on failure and *errno* is set .

`inet_pton()` returns `1` on success. It returns `-1` if there was an error *errno* is set , or `0` if the input isn t a valid IP address.

Example

```
// IPv4 demo of inet_ntop() and inet_pton()

struct sockaddr_in sa;
char str[INET_ADDRSTRLEN];

// store this IP address in sa:
inet_pton(AF_INET, "192.0.2.33", &(sa.sin_addr));

// now get it back and print it
inet_ntop(AF_INET, &(sa.sin_addr), str, INET_ADDRSTRLEN);

printf("%s\n", str); // prints "192.0.2.33"
```

```
// IPv6 demo of inet_ntop() and inet_pton()
// (basically the same except with a bunch of 6s thrown around)

struct sockaddr_in6 sa;
```

```
char str[INET6_ADDRSTRLEN];

// store this IP address in sa:
inet_pton(AF_INET6, "2001:db8:8714:3a90::12", &(sa.sin6_addr));

// now get it back and print it
inet_ntop(AF_INET6, &(sa.sin6_addr), str, INET6_ADDRSTRLEN);

printf("%s\n", str); // prints "2001:db8:8714:3a90::12"
```

```
// Helper function you can use:

//Convert a struct sockaddr address to a string, IPv4 and IPv6:

char *get_ip_str(const struct sockaddr *sa, char *s, size_t maxlen)
{
    switch(sa->sa_family) {
        case AF_INET:
            inet_ntop(AF_INET, &(((struct sockaddr_in *)sa)->sin_addr),
                    s, maxlen);
            break;

        case AF_INET6:
            inet_ntop(AF_INET6, &(((struct sockaddr_in6 *)sa)->sin6_addr),
                    s, maxlen);
            break;

        default:
            strncpy(s, "Unknown AF", maxlen);
            return NULL;
    }

    return s;
}
```

See Also

    getaddrinfo()

9.15. `listen()`

Tell a socket to listen for incoming connections

Prototypes

```
#include <sys/socket.h>

int listen(int s, int backlog);
```

Description

ou can take your socket descriptor made with the **`socket()`** system call and tell it to listen for incoming connections. This is what differentiates the servers from the clients, guys.

The *`backlog`* parameter can mean a couple different things depending on the system you on, but loosely it is how many pending connections you can have before the kernel starts rejecting new ones. So as the new connections come in, you should be uick to **`accept()`** them so that the backlog doesn t fill. Try setting it to 10 or so, and if your clients start getting "Connection refused" under heavy load, set it higher.

Before calling **`listen()`**, your server should call **`bind()`** to attach itself to a specific port number. That port number on the server s IP address will be the one that clients connect to.

Return Value

Returns zero on success, or `-1` on error and **`errno`** will be set accordingly.

Example

```
struct addrinfo hints, *res;
int sockfd;

// first, load up address structs with getaddrinfo():

memset(&hints, 0, sizeof hints);
hints.ai_family = AF_UNSPEC;  // use IPv4 or IPv6, whichever
hints.ai_socktype = SOCK_STREAM;
hints.ai_flags = AI_PASSIVE;     // fill in my IP for me

getaddrinfo(NULL, "3490", &hints, &res);

// make a socket:

sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);

// bind it to the port we passed in to getaddrinfo():

bind(sockfd, res->ai_addr, res->ai_addrlen);

listen(sockfd, 10); // set s up to be a server (listening) socket

// then have an accept() loop down here somewhere
```

See Also

`accept()`, **`bind()`**, **`socket()`**

9.16. `perror()`, `strerror()`

Print an error as a human-readable string

Prototypes

```
#include <stdio.h>
#include <string.h>   // for strerror()

void perror(const char *s);
char *strerror(int errnum);
```

Description

Since so many functions return -1 on error and set the value of the variable *errno* to be some number, it would sure be nice if you could easily print that in a form that made sense to you.

Mercifully, **perror()** does that. If you want more description to be printed before the error, you can point the parameter *s* to it or you can leave *s* as NULL and nothing additional will be printed.

In a nutshell, this function takes *errno* values, like ECONNRESET, and prints them nicely, like "Connection reset by peer."

The function **strerror()** is very similar to **perror()**, except it returns a pointer to the error message string for a given value you usually pass in the variable *errno*.

Return Value

strerror() returns a pointer to the error message string.

Example

```
int s;

s = socket(PF_INET, SOCK_STREAM, 0);

if (s == -1) { // some error has occurred
    // prints "socket error: " + the error message:
    perror("socket error");
}

// similarly:
if (listen(s, 10) == -1) {
    // this prints "an error: " + the error message from errno:
    printf("an error: %s\n", strerror(errno));
}
```

See Also

errno

9.17. `poll()`

Test for events on multiple sockets simultaneously

Prototypes

```
#include <sys/poll.h>

int poll(struct pollfd *ufds, unsigned int nfds, int timeout);
```

Description

This function is very similar to **select()** in that they both watch sets of file descriptors for events, such as incoming data ready to **recv()**, socket ready to **send()** data to, out-of-band data ready to **recv()**, errors, etc.

The basic idea is that you pass an array of *nfds* struct pollfds in *ufds*, along with a timeout in milliseconds 1000 milliseconds in a second. The *timeout* can be negative if you want to wait forever. If no event happens on any of the socket descriptors by the timeout, **poll()** will return.

ach element in the array of struct pollfds represents one socket descriptor, and contains the following fields:

```
struct pollfd {
    int fd;         // the socket descriptor
    short events;   // bitmap of events we're interested in
    short revents;  // when poll() returns, bitmap of events that occurred
};
```

Before calling **poll()**, load *fd* with the socket descriptor if you set *fd* to a negative number, this struct pollfd is ignored and its *revents* field is set to zero and then construct the *events* field by bitwise-ORing the following macros:

POLLIN	Alert me when data is ready to **recv()** on this socket.
POLLOUT	Alert me when I can **send()** data to this socket without blocking.
POLLPRI	Alert me when out-of-band data is ready to **recv()** on this socket.

Once the **poll()** call returns, the *revents* field will be constructed as a bitwise-OR of the above fields, telling you which descriptors actually have had that event occur. Additionally, these other fields might be present:

POLLERR	An error has occurred on this socket.
POLLHUP	The remote side of the connection hung up.
POLLNVAL	Something was wrong with the socket descriptor *fd* maybe it s uninitialized

Return Value

Returns the number of elements in the *ufds* array that have had event occur on them this can be zero if the timeout occurred. Also returns -1 on error and **errno** will be set accordingly.

Example

```
int s1, s2;
int rv;
char buf1[256], buf2[256];
struct pollfd ufds[2];

s1 = socket(PF_INET, SOCK_STREAM, 0);
s2 = socket(PF_INET, SOCK_STREAM, 0);

// pretend we've connected both to a server at this point
//connect(s1, ...)...
//connect(s2, ...)...
```

```
// set up the array of file descriptors.
//
// in this example, we want to know when there's normal or out-of-band
// data ready to be recv()'d...

ufds[0].fd = s1;
ufds[0].events = POLLIN | POLLPRI; // check for normal or out-of-band

ufds[1] = s2;
ufds[1].events = POLLIN; // check for just normal data

// wait for events on the sockets, 3.5 second timeout
rv = poll(ufds, 2, 3500);

if (rv == -1) {
    perror("poll"); // error occurred in poll()
} else if (rv == 0) {
    printf("Timeout occurred!  No data after 3.5 seconds.\n");
} else {
    // check for events on s1:
    if (ufds[0].revents & POLLIN) {
        recv(s1, buf1, sizeof buf1, 0); // receive normal data
    }
    if (ufds[0].revents & POLLPRI) {
        recv(s1, buf1, sizeof buf1, MSG_OOB); // out-of-band data
    }

    // check for events on s2:
    if (ufds[1].revents & POLLIN) {
        recv(s1, buf2, sizeof buf2, 0);
    }
}
```

See Also

select()

9.18. `recv()`, `recvfrom()`

Receive data on a socket

Prototypes

```
#include <sys/types.h>
#include <sys/socket.h>

ssize_t recv(int s, void *buf, size_t len, int flags);
ssize_t recvfrom(int s, void *buf, size_t len, int flags,
                 struct sockaddr *from, socklen_t *fromlen);
```

Description

Once you have a socket up and connected, you can read incoming data from the remote side using the **recv()** for TCP SOCK_STREAM sockets and **recvfrom()** for UDP SOCK_DGRAM sockets .

Both functions take the socket descriptor *s*, a pointer to the buffer *buf*, the size in bytes of the buffer *len*, and a set of *flags* that control how the functions work.

Additionally, the **recvfrom()** takes a struct sockaddr*, *from* that will tell you where the data came from, and will fill in *fromlen* with the size of struct sockaddr.   ou must also initialize *fromlen* to be the size of *from* or struct sockaddr.

So what wondrous flags can you pass into this function Here are some of them, but you should check your local man pages for more information and what is actually supported on your system.   ou bitwise-or these together, or just set *flags* to 0 if you want it to be a regular vanilla **recv()**.

MSG_OOB	Receive Out of Band data. This is how to get data that has been sent to you with the MSG_OOB flag in **send()**. As the receiving side, you will have had signal SIGURG raised telling you there is urgent data. In your handler for that signal, you could call **recv()** with this MSG_OOB flag.
MSG_PEEK	If you want to call **recv()** "just for pretend", you can call it with this flag. This will tell you what s waiting in the buffer for when you call **recv()** "for real" i.e. *without* the MSG_PEEK flag. It s like a sneak preview into the next **recv()** call.
MSG_WAITALL	Tell **recv()** to not return until all the data you specified in the *len* parameter. It will ignore your wishes in extreme circumstances, however, like if a signal interrupts the call or if some error occurs or if the remote side closes the connection, etc. Don t be mad with it.

When you call **recv()**, it will block until there is some data to read. If you want to not block, set the socket to non-blocking or check with **select()** or **poll()** to see if there is incoming data before calling **recv()** or **recvfrom()**.

Return Value

Returns the number of bytes actually received which might be less than you re uested in the *len* parameter , or -1 on error and **errno** will be set accordingly.

If the remote side has closed the connection, **recv()** will return 0. This is the normal method for determining if the remote side has closed the connection. Normality is good, rebel

Example

```
// stream sockets and recv()

struct addrinfo hints, *res;
int sockfd;
char buf[512];
int byte_count;

// get host info, make socket, and connect it
memset(&hints, 0, sizeof hints);
```

```
hints.ai_family = AF_UNSPEC;  // use IPv4 or IPv6, whichever
hints.ai_socktype = SOCK_STREAM;
getaddrinfo("www.example.com", "3490", &hints, &res);
sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
connect(sockfd, res->ai_addr, res->ai_addrlen);

// all right!  now that we're connected, we can receive some data!
byte_count = recv(sockfd, buf, sizeof buf, 0);
printf("recv()'d %d bytes of data in buf\n", byte_count);
```

```
// datagram sockets and recvfrom()

struct addrinfo hints, *res;
int sockfd;
int byte_count;
socklen_t fromlen;
struct sockaddr_storage addr;
char buf[512];
char ipstr[INET6_ADDRSTRLEN];

// get host info, make socket, bind it to port 4950
memset(&hints, 0, sizeof hints);
hints.ai_family = AF_UNSPEC;  // use IPv4 or IPv6, whichever
hints.ai_socktype = SOCK_DGRAM;
hints.ai_flags = AI_PASSIVE;
getaddrinfo(NULL, "4950", &hints, &res);
sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
bind(sockfd, res->ai_addr, res->ai_addrlen);

// no need to accept(), just recvfrom():

fromlen = sizeof addr;
byte_count = recvfrom(sockfd, buf, sizeof buf, 0, &addr, &fromlen);

printf("recv()'d %d bytes of data in buf\n", byte_count);
printf("from IP address %s\n",
    inet_ntop(addr.ss_family,
        addr.ss_family == AF_INET?
            ((struct sockadd_in *)&addr)->sin_addr:
            ((struct sockadd_in6 *)&addr)->sin6_addr,
        ipstr, sizeof ipstr);
```

See Also
   send(), **sendto()**, **select()**, **poll()**, Blocking

9.19. `select()`

Check if sockets descriptors are ready to read/write

Prototypes

```
#include <sys/select.h>

int select(int n, fd_set *readfds, fd_set *writefds, fd_set *exceptfds,
           struct timeval *timeout);

FD_SET(int fd, fd_set *set);
FD_CLR(int fd, fd_set *set);
FD_ISSET(int fd, fd_set *set);
FD_ZERO(fd_set *set);
```

Description

The **select()** function gives you a way to simultaneously check multiple sockets to see if they have data waiting to be **recv()**d, or if you can **send()** data to them without blocking, or if some exception has occurred.

ou populate your sets of socket descriptors using the macros, like **FD_SET()**, above. Once you have the set, you pass it into the function as one of the following parameters: *readfds* if you want to know when any of the sockets in the set is ready to **recv()** data, *writefds* if any of the sockets is ready to **send()** data to, and/or *exceptfds* if you need to know when an exception error occurs on any of the sockets. Any or all of these parameters can be NULL if you re not interested in those types of events. After **select()** returns, the values in the sets will be changed to show which are ready for reading or writing, and which have exceptions.

The first parameter, *n* is the highest-numbered socket descriptor they re just ints, remember   plus one.

Lastly, the struct timeval, *timeout*, at the end   this lets you tell **select()** how long to check these sets for. It ll return after the timeout, or when an event occurs, whichever is first. The struct timeval has two fields: *tv_sec* is the number of seconds, to which is added *tv_usec*, the number of microseconds 1,000,000 microseconds in a second.

The helper macros do the following:

FD_SET(int fd, fd_set *set);	Add *fd* to the *set*.
FD_CLR(int fd, fd_set *set);	Remove *fd* from the *set*.
FD_ISSET(int fd, fd_set *set);	Return true if *fd* is in the *set*.
FD_ZERO(fd_set *set);	Clear all entries from the *set*.

Return Value

Returns the number of descriptors in the set on success, 0 if the timeout was reached, or -1 on error and **errno** will be set accordingly. Also, the sets are modified to show which sockets are ready.

Example

```
int s1, s2, n;
fd_set readfds;
struct timeval tv;
char buf1[256], buf2[256];

// pretend we've connected both to a server at this point
//s1 = socket(...);
//s2 = socket(...);
//connect(s1, ...)...
//connect(s2, ...)...

// clear the set ahead of time
FD_ZERO(&readfds);
```

```
// add our descriptors to the set
FD_SET(s1, &readfds);
FD_SET(s2, &readfds);

// since we got s2 second, it's the "greater", so we use that for
// the n param in select()
n = s2 + 1;

// wait until either socket has data ready to be recv()d (timeout 10.5 secs)
tv.tv_sec = 10;
tv.tv_usec = 500000;
rv = select(n, &readfds, NULL, NULL, &tv);

if (rv == -1) {
    perror("select"); // error occurred in select()
} else if (rv == 0) {
    printf("Timeout occurred!  No data after 10.5 seconds.\n");
} else {
    // one or both of the descriptors have data
    if (FD_ISSET(s1, &readfds)) {
        recv(s1, buf1, sizeof buf1, 0);
    }
    if (FD_ISSET(s2, &readfds)) {
        recv(s1, buf2, sizeof buf2, 0);
    }
}
```

See Also

> **poll()**

9.20. `setsockopt()`, `getsockopt()`

Set various options for a socket

Prototypes

```
#include <sys/types.h>
#include <sys/socket.h>

int getsockopt(int s, int level, int optname, void *optval,
               socklen_t *optlen);
int setsockopt(int s, int level, int optname, const void *optval,
               socklen_t optlen);
```

Description

Sockets are fairly configurable beasts. In fact, they are so configurable, I m not even going to cover it all here. It s probably system-dependent anyway. But I will talk about the basics.

Obviously, these functions get and set certain options on a socket. On a Linux box, all the socket information is in the man page for socket in section . Type: "**man 7 socket**" to get all these goodies.

As for parameters, `s` is the socket you re talking about, level should be set to SOL_SOCKET. Then you set the `optname` to the name you re interested in. Again, see your man page for all the options, but here are some of the most fun ones:

SO_BINDTODEVICE	Bind this socket to a symbolic device name like `eth0` instead of using **bind()** to bind it to an IP address. Type the command **ifconfig** under Unix to see the device names.
SO_REUSEADDR	Allows other sockets to **bind()** to this port, unless there is an active listening socket bound to the port already. This enables you to get around those "Address already in use" error messages when you try to restart your server after a crash.
SO_BROADCAST	Allows UDP datagram `SOCK_DGRAM` sockets to send and receive packets sent to and from the broadcast address. Does nothing *NOTHING!!* to TCP stream sockets Hahaha

As for the parameter `optval`, it s usually a pointer to an `int` indicating the value in uestion. For booleans, zero is false, and non-zero is true. And that s an absolute fact, unless it s different on your system. If there is no parameter to be passed, `optval` can be NULL.

The final parameter, `optlen`, is filled out for you by **getsockopt()** and you have to specify it for **setsockopt()**, where it will probably be sizeof(int).

Warning: on some systems notably Sun and Windows , the option can be a `char` instead of an `int`, and is set to, for example, a character value of `'1'` instead of an `int` value of `1`. Again, check your own man pages for more info with "**man setsockopt**" and "**man 7 socket**"

Return Value

Returns zero on success, or `-1` on error and **errno** will be set accordingly.

Example

```
int optval;
int optlen;
char *optval2;

// set SO_REUSEADDR on a socket to true (1):
optval = 1;
setsockopt(s1, SOL_SOCKET, SO_REUSEADDR, &optval, sizeof optval);

// bind a socket to a device name (might not work on all systems):
optval2 = "eth1"; // 4 bytes long, so 4, below:
setsockopt(s2, SOL_SOCKET, SO_BINDTODEVICE, optval2, 4);
```

```
// see if the SO_BROADCAST flag is set:
getsockopt(s3, SOL_SOCKET, SO_BROADCAST, &optval, &optlen);
if (optval != 0) {
    print("SO_BROADCAST enabled on s3!\n");
}
```

See Also

fcntl()

9.21. `send()`, `sendto()`

Send data out over a socket

Prototypes

```
#include <sys/types.h>
#include <sys/socket.h>

ssize_t send(int s, const void *buf, size_t len, int flags);
ssize_t sendto(int s, const void *buf, size_t len,
               int flags, const struct sockaddr *to,
               socklen_t tolen);
```

Description

These functions send data to a socket. Generally speaking, **send()** is used for TCP SOCK_STREAM connected sockets, and **sendto()** is used for UDP SOCK_DGRAM unconnected datagram sockets. With the unconnected sockets, you must specify the destination of a packet each time you send one, and that s why the last parameters of **sendto()** define where the packet is going.

With both **send()** and **sendto()**, the parameter *s* is the socket, *buf* is a pointer to the data you want to send, *len* is the number of bytes you want to send, and *flags* allows you to specify more information about how the data is to be sent. Set *flags* to zero if you want it to be "normal" data. Here are some of the commonly used flags, but check your local **send()** man pages for more details:

MSG_OOB	Send as "out of band" data. TCP supports this, and it s a way to tell the receiving system that this data has a higher priority than the normal data. The receiver will receive the signal SIGURG and it can then receive this data without first receiving all the rest of the normal data in the ueue.
MSG_DONTROUTE	Don t send this data over a router, just keep it local.
MSG_DONTWAIT	If **send()** would block because outbound traffic is clogged, have it return EAGAIN. This is like a "enable non-blocking just for this send." See the section on blocking for more details.
MSG_NOSIGNAL	If you **send()** to a remote host which is no longer **recv()**ing, you ll typically get the signal SIGPIPE. Adding this flag prevents that signal from being raised.

Return Value

Returns the number of bytes actually sent, or -1 on error and **errno** will be set accordingly. Note that the number of bytes actually sent might be less than the number you asked it to send See the section on handling partial **send()**s for a helper function to get around this.

Also, if the socket has been closed by either side, the process calling **send()** will get the signal SIGPIPE. Unless **send()** was called with the MSG_NOSIGNAL flag.

Example

```
int spatula_count = 3490;
char *secret_message = "The Cheese is in The Toaster";

int stream_socket, dgram_socket;
struct sockaddr_in dest;
int temp;

// first with TCP stream sockets:

// assume sockets are made and connected
//stream_socket = socket(...
//connect(stream_socket, ...
```

```
// convert to network byte order
temp = htonl(spatula_count);
// send data normally:
send(stream_socket, &temp, sizeof temp, 0);

// send secret message out of band:
send(stream_socket, secret_message, strlen(secret_message)+1, MSG_OOB);

// now with UDP datagram sockets:
//getaddrinfo(...
//dest = ...  // assume "dest" holds the address of the destination
//dgram_socket = socket(...

// send secret message normally:
sendto(dgram_socket, secret_message, strlen(secret_message)+1, 0,
       (struct sockaddr*)&dest, sizeof dest);
```

See Also

recv(), **recvfrom()**

9.22. `shutdown()`

Stop further sends and receives on a socket

Prototypes

```
#include <sys/socket.h>

int shutdown(int s, int how);
```

Description

That s it I ve had it No more **send()**s are allowed on this socket, but I still want to **recv()** data on it Or vice-versa How can I do this

When you **close()** a socket descriptor, it closes both sides of the socket for reading and writing, and frees the socket descriptor. If you just want to close one side or the other, you can use this **shutdown()** call.

As for parameters, *s* is obviously the socket you want to perform this action on, and what action that is can be specified with the *how* parameter. How can be SHUT_RD to prevent further **recv()**s, SHUT_WR to prohibit further **send()**s, or SHUT_RDWR to do both.

Note that **shutdown()** doesn t free up the socket descriptor, so you still have to eventually **close()** the socket even if it has been fully shut down.

This is a rarely used system call.

Return Value

Returns zero on success, or -1 on error and **errno** will be set accordingly.

Example

```
int s = socket(PF_INET, SOCK_STREAM, 0);

// ...do some send()s and stuff in here...

// and now that we're done, don't allow any more sends()s:
shutdown(s, SHUT_WR);
```

See Also

    close()

9.23. `socket()`

Allocate a socket descriptor

Prototypes

```
#include <sys/types.h>
#include <sys/socket.h>

int socket(int domain, int type, int protocol);
```

Description

Returns a new socket descriptor that you can use to do sockety things with. This is generally the first call in the whopping process of writing a socket program, and you can use the result for subse uent calls to **listen()**, bind(), accept(), or a variety of other functions.

In usual usage, you get the values for these parameters from a call to **getaddrinfo()**, as shown in the example below. But you can fill them in by hand if you really want to.

domain	*domain* describes what kind of socket you re interested in. This can, believe me, be a wide variety of things, but since this is a socket guide, it s going to be `PF_INET` for IPv4, and `PF_INET6` for IPv .
type	Also, the *type* parameter can be a number of things, but you ll probably be setting it to either `SOCK_STREAM` for reliable TCP sockets **send()**, **recv()** or `SOCK_DGRAM` for unreliable fast UDP sockets **sendto()**, **recvfrom()**. Another interesting socket type is `SOCK_RAW` which can be used to construct packets by hand. It s pretty cool.
protocol	Finally, the *protocol* parameter tells which protocol to use with a certain socket type. Like I ve already said, for instance, `SOCK_STREAM` uses TCP. Fortunately for you, when using `SOCK_STREAM` or `SOCK_DGRAM`, you can just set the protocol to 0, and it ll use the proper protocol automatically. Otherwise, you can use **getprotobyname()** to look up the proper protocol number.

Return Value

The new socket descriptor to be used in subse uent calls, or `-1` on error and **errno** will be set accordingly.

Example

```
struct addrinfo hints, *res;
int sockfd;

// first, load up address structs with getaddrinfo():

memset(&hints, 0, sizeof hints);
hints.ai_family = AF_UNSPEC;     // AF_INET, AF_INET6, or AF_UNSPEC
hints.ai_socktype = SOCK_STREAM; // SOCK_STREAM or SOCK_DGRAM

getaddrinfo("www.example.com", "3490", &hints, &res);

// make a socket using the information gleaned from getaddrinfo():
sockfd = socket(res->ai_family, res->ai_socktype, res->ai_protocol);
```

See Also

accept(), **bind()**, **getaddrinfo()**, **listen()**

9.24. `struct sockaddr` and pals

Structures for handling internet addresses

Prototypes

```
include <netinet/in.h>

// All pointers to socket address structures are often cast to pointers
// to this type before use in various functions and system calls:

struct sockaddr {
    unsigned short    sa_family;    // address family, AF_xxx
    char              sa_data[14];  // 14 bytes of protocol address
};


// IPv4 AF_INET sockets:

struct sockaddr_in {
    short             sin_family;   // e.g. AF_INET, AF_INET6
    unsigned short    sin_port;     // e.g. htons(3490)
    struct in_addr    sin_addr;     // see struct in_addr, below
    char              sin_zero[8];  // zero this if you want to
};

struct in_addr {
    unsigned long s_addr;           // load with inet_pton()
};


// IPv6 AF_INET6 sockets:

struct sockaddr_in6 {
    u_int16_t        sin6_family;   // address family, AF_INET6
    u_int16_t        sin6_port;     // port number, Network Byte Order
    u_int32_t        sin6_flowinfo; // IPv6 flow information
    struct in6_addr sin6_addr;      // IPv6 address
    u_int32_t        sin6_scope_id; // Scope ID
};

struct in6_addr {
    unsigned char   s6_addr[16];    // load with inet_pton()
};


// General socket address holding structure, big enough to hold either
// struct sockaddr_in or struct sockaddr_in6 data:

struct sockaddr_storage {
    sa_family_t  ss_family;      // address family

    // all this is padding, implementation specific, ignore it:
    char      __ss_pad1[_SS_PAD1SIZE];
    int64_t   __ss_align;
    char      __ss_pad2[_SS_PAD2SIZE];
};
```

Description

These are the basic structures for all syscalls and functions that deal with internet addresses. Often you ll use **getaddinfo()** to fill these structures out, and then will read them when you have to.

In memory, the struct sockaddr_in and struct sockaddr_in6 share the same beginning structure as struct sockaddr, and you can freely cast the pointer of one type to the other without any harm, except the possible end of the universe.

Just kidding on that end-of-the-universe thing...if the universe does end when you cast a `struct sockaddr_in*` to a `struct sockaddr*`, I promise you it s pure coincidence and you shouldn t even worry about it.

So, with that in mind, remember that whenever a function says it takes a `struct sockaddr*` you can cast your `struct sockaddr_in*`, `struct sockaddr_in6*`, or `struct sockadd_storage*` to that type with ease and safety.

`struct sockaddr_in` is the structure used with IPv4 addresses e.g. "192.0.2.10" . It holds an address family `AF_INET` , a port in *sin_port*, and an IPv4 address in *sin_addr*.

There s also this `sin_zero` field in `struct sockaddr_in` which some people claim must be set to zero. Other people don t claim anything about it the Linux documentation doesn t even mention it at all , and setting it to zero doesn t seem to be actually necessary. So, if you feel like it, set it to zero using **memset()**.

Now, that `struct in_addr` is a weird beast on different systems. Sometimes it s a crazy `union` with all kinds of `#defines` and other nonsense. But what you should do is only use the *s_addr* field in this structure, because many systems only implement that one.

`struct sockadd_in6` and `struct in6_addr` are very similar, except they re used for IPv .

`struct sockaddr_storage` is a struct you can pass to **accept()** or **recvfrom()** when you re trying to write IP version-agnostic code and you don t know if the new address is going to be IPv4 or IPv . The `struct sockaddr_storage` structure is large enough to hold both types, unlike the original small `struct sockaddr`.

Example

```
// IPv4:

struct sockaddr_in ip4addr;
int s;

ip4addr.sin_family = AF_INET;
ip4addr.sin_port = htons(3490);
inet_pton(AF_INET, "10.0.0.1", &ip4addr.sin_addr);

s = socket(PF_INET, SOCK_STREAM, 0);
bind(s, (struct sockaddr*)&ip4addr, sizeof ip4addr);
```

```
// IPv6:

struct sockaddr_in6 ip6addr;
int s;

ip6addr.sin6_family = AF_INET6;
ip6addr.sin6_port = htons(4950);
inet_pton(AF_INET6, "2001:db8:8714:3a90::12", &ip6addr.sin6_addr);

s = socket(PF_INET6, SOCK_STREAM, 0);
bind(s, (struct sockaddr*)&ip6addr, sizeof ip6addr);
```

See Also

accept(), **bind()**, **connect()**, **inet_aton()**, **inet_ntoa()**

10. More References

ou ve come this far, and now you re screaming for more Where else can you go to learn more about all this stuff

10.1. Books

For old-school actual hold-it-in-your-hand pulp paper books, try some of the following excellent books. I used to be an affiliate with a very popular internet bookseller, but their new customer tracking system is incompatible with a print document. As such, I get no more kickbacks. If you feel compassion for my plight, paypal a donation to beej@beej.us. :-)

Unix Network Programming, volumes 1-2 by W. Richard Stevens. Published by Prentice Hall. ISBNs for volumes 1-2: 0131411551[43], 0130 10 19[44].

Internetworking with TCP/IP, volumes I-III by Douglas . Comer and David L. Stevens. Published by Prentice Hall. ISBNs for volumes I, II, and III: 0131   1 [45], 01303199 1[4] , 0130320 14[4] .

TCP/IP Illustrated, volumes 1-3 by W. Richard Stevens and Gary R. Wright. Published by Addison Wesley. ISBNs for volumes 1, 2, and 3 and a 3-volume set : 0201 334 9[4] , 0201 3354X[49], 0201 34953[50], 0201   31 [51] .

TCP/IP Network Administration by Craig Hunt. Published by O Reilly   Associates, Inc. ISBN 059 0029 1[52].

Advanced Programming in the UNIX Environment by W. Richard Stevens. Published by Addison Wesley. ISBN 02014330 9[53].

10.2. Web References

On the web

BSD Sockets: A Quick And Dirty Primer[54] Unix system programming info, too

The Unix Socket FAQ[55]

Intro to TCP/IP[5]

TCP/IP FAQ[5]

The Winsock FAQ[5]

And here are some relevant Wikipedia pages:

Berkeley Sockets[59]

Internet Protocol (IP) [0]

---

43. http://beej.us/guide/url/unixnet1
44. http://beej.us/guide/url/unixnet2
45. http://beej.us/guide/url/intertcp1
4 . http://beej.us/guide/url/intertcp2
4 . http://beej.us/guide/url/intertcp3
4 . http://beej.us/guide/url/tcpi1
49. http://beej.us/guide/url/tcpi2
50. http://beej.us/guide/url/tcpi3
51. http://beej.us/guide/url/tcpi123
52. http://beej.us/guide/url/tcpna
53. http://beej.us/guide/url/advunix
54. http://www.frostbytes.com/~jimf/papers/sockets/sockets.html
55. http://www.developerweb.net/forum/forumdisplay.php?f=70
5 . http://pclt.cis.yale.edu/pclt/COMM/TCPIP.HTM
5 . http://www.faqs.org/faqs/internet/tcp-ip/tcp-ip-faq/part1/
5 . http://tangentsoft.net/wskfaq/
59. http://en.wikipedia.org/wiki/Berkeley_sockets
 0. http://en.wikipedia.org/wiki/Internet_Protocol

Transmission Control Protocol (TCP) [1]

User Datagram Protocol (UDP) [2]

Client-Server [3]

Serialization [4] packing and unpacking data

10.3. RFCs

RFCs [5]   the real dirt These are documents that describe assigned numbers, programming APIs, and protocols that are used on the Internet. I ve included links to a few of them here for your enjoyment, so grab a bucket of popcorn and put on your thinking cap:

RFC 1   The First RFC this gives you an idea of what the "Internet" was like just as it was coming to life, and an insight into how it was being designed from the ground up. This RFC is completely obsolete, obviously

RFC 768   The User Datagram Protocol UDP

RFC 791   The Internet Protocol IP

RFC 793 [9]   The Transmission Control Protocol TCP

RFC 854 [0]   The Telnet Protocol

RFC 959 [1]   File Transfer Protocol FTP

RFC 1350 [2]   The Trivial File Transfer Protocol TFTP

RFC 1459 [3]   Internet Relay Chat Protocol IRC

RFC 1918 [4]   Address Allocation for Private Internets

RFC 2131 [5]   Dynamic Host Configuration Protocol DHCP

RFC 2616   Hypertext Transfer Protocol HTTP

RFC 2821   Simple Mail Transfer Protocol SMTP

RFC 3330   Special-Use IPv4 Addresses

RFC 3493 [9]   Basic Socket Interface   xtensions for IPv

RFC 3542 [0]   Advanced Sockets Application Program Interface API for IPv

RFC 3849 [1]   IPv Address Prefix Reserved for Documentation

RFC 3920 [2]   xtensible Messaging and Presence Protocol XMPP

---

1. http://en.wikipedia.org/wiki/Transmission_Control_Protocol
2. http://en.wikipedia.org/wiki/User_Datagram_Protocol
3. http://en.wikipedia.org/wiki/Client-server
4. http://en.wikipedia.org/wiki/Serialization
5. http://www.rfc-editor.org/
 . http://tools.ietf.org/html/rfc1
 . http://tools.ietf.org/html/rfc768
 . http://tools.ietf.org/html/rfc791
9. http://tools.ietf.org/html/rfc793
0. http://tools.ietf.org/html/rfc854
1. http://tools.ietf.org/html/rfc959
2. http://tools.ietf.org/html/rfc1350
3. http://tools.ietf.org/html/rfc1459
4. http://tools.ietf.org/html/rfc1918
5. http://tools.ietf.org/html/rfc2131
 . http://tools.ietf.org/html/rfc2616
 . http://tools.ietf.org/html/rfc2821
 . http://tools.ietf.org/html/rfc3330
9. http://tools.ietf.org/html/rfc3493
0. http://tools.ietf.org/html/rfc3542
1. http://tools.ietf.org/html/rfc3849
2. http://tools.ietf.org/html/rfc3920

RFC 3977 [3]   Network News Transfer Protocol NNTP

RFC 4193 [4]   Uni ue Local IPv Unicast Addresses

RFC 4506 [5]   xternal Data Representation Standard XDR

The I TF has a nice online tool for searching and browsing RFCs .

3. http://tools.ietf.org/html/rfc3977
4. http://tools.ietf.org/html/rfc4193
5. http://tools.ietf.org/html/rfc4506
 .http://tools.ietf.org/rfc/

Index

103