

KR 4 R600-3



Technical data

Maximum reach	600 mm
Maximum payload	5.2 kg
Pose repeatability (ISO 9283)	± 0.015 mm
Number of axes	6
Mounting position	Floor; Ceiling; Desired angle
Footprint	160 mm x 160 mm
Weight	approx. 23 kg

Axis data

Motion range	
A1	±170 °
A2	-195 ° / 40 °
A3	-115 ° / 150 °
A4	±185 °
A5	±120 °
A6	±350 °

Operating conditions

Ambient temperature during operation	0 °C to 45 °C (273 K to 318 K)
--------------------------------------	--------------------------------

Protection rating


Protection rating (IEC 60529)	IP54
Protection rating, robot wrist (IEC 60529)	IP54

Controller


Controller	KR C5 micro
------------	-------------

Cycle time


158 cycles per minute (25 mm / 305 mm / 25 mm, 1 kg)

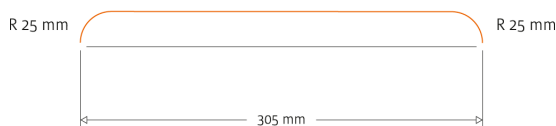

Workspace graphic

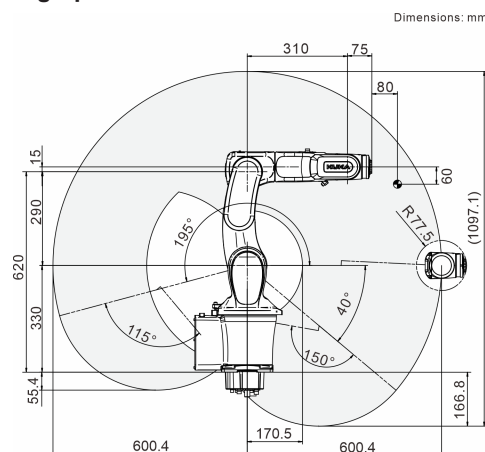

Payload diagram

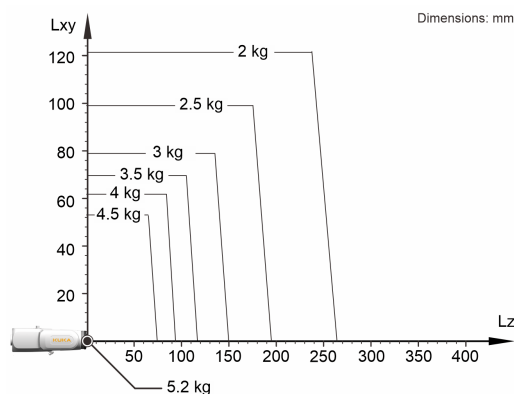

The KR 4 R600-3 is designed for a rated payload of 4 kg in order to optimize the dynamic performance of the robot. With reduced load center distances and favorable supplementary loads, a maximum payload of up to 5.2 kg can be mounted. The specific KUKA Load case must be verified using KUKA. For further consultation, please contact KUKA Service.

Mounting flange

