


(a) $N=256$; common bistatic receiver excluded



(b) Where the two-stage RIS draws less power (PIN R-RIS)

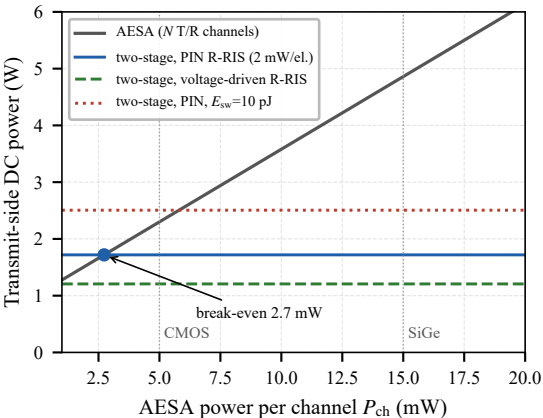