APPLICATIONS AND SIZE OPTIONS

5 RAIL SINGLE GLASS SLIDING 5 PANELS

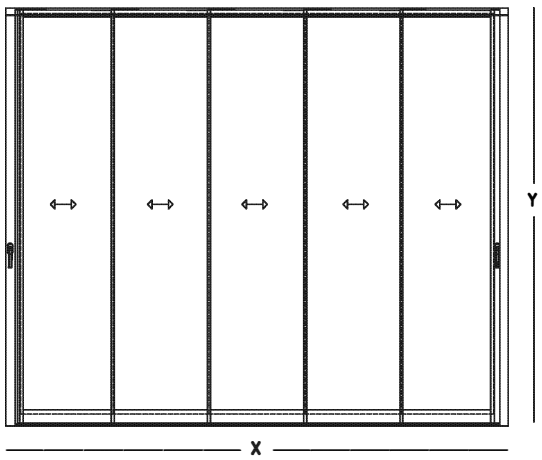

	WIDTH MIN	WIDTH MAX	MAX M²
x	2500 mm	6000 mm	18m²
y	1000 mm	3000 mm	
z	max. panel width is 1200 mm		

- System dimensions must remain between the minimum and maximum dimensions given above.
- On the edge version, up to 12 meters width can be produced and max. square meter will be 48.

3 RAIL SINGLE GLASS SLIDING 3 PANELS

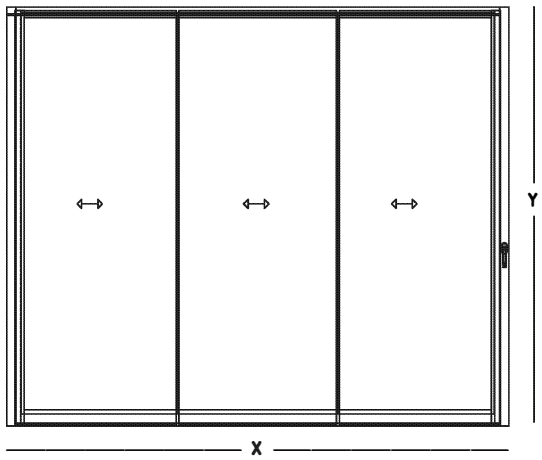

	WIDTH MIN	WIDTH MAX	MAX M²
x	1500 mm	3750 mm	11 m²
y	1000 mm	3000 mm	
z	max. panel width is 1200 mm		

- System dimensions must remain between the minimum and maximum dimensions given above.
- On the edge version, up to 7,5 meters width can be produced and max. square meter will be 22,5.

THERMAL SLIDING 4 PANELS

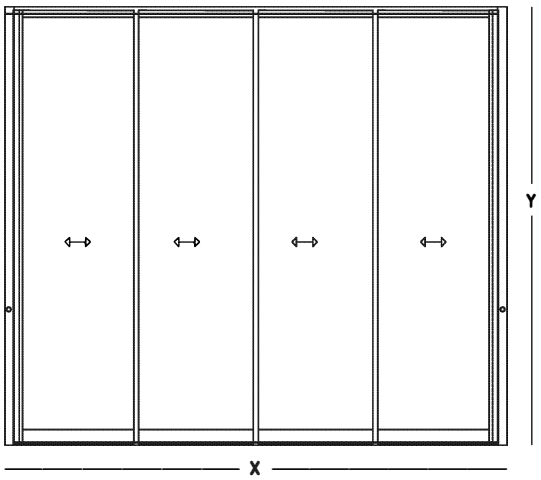

	WIDTH MIN	WIDTH MAX	MAX M²
x	2000 mm	5000 mm	15 m²
y	1000 mm	3000 mm	
z	max. panel width is 1200 mm		

- System dimensions must remain between the minimum and maximum dimensions given above.
- On the edge version, up to 10 meters width can be produced and max. square meter will be 30.

HUUN®
ALUMINIUM TECHNOLOGY

APPLICATIONS AND SIZE OPTIONS

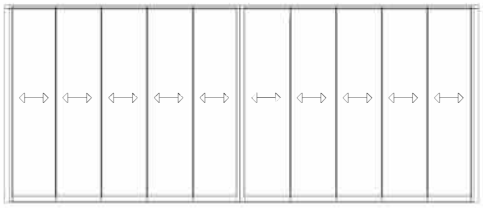

5 RAIL SINGLE GLASS SLIDING
5+5 PANELS

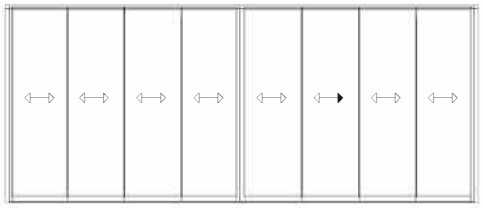

5 RAIL SINGLE GLASS SLIDING
4+4 PANELS

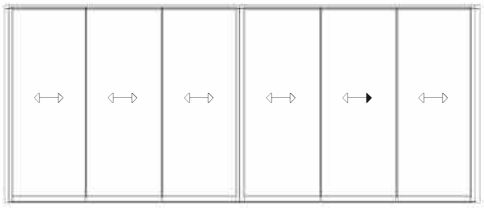

5 RAIL SINGLE GLASS SLIDING
3+3 PANELS

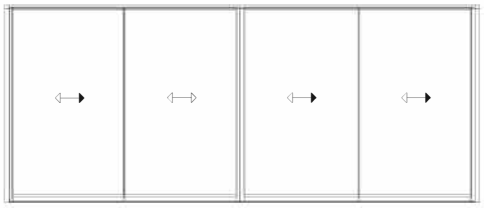

5 RAIL SINGLE GLASS SLIDING
2+2 PANELS



5 RAIL SINGLE GLASS
SLIDING 5 PANELS



5 RAIL SINGLE
GLASS SLIDING
4 PANELS



5 RAIL SINGLE GLASS
SLIDING 3 PANELS



5 RAIL SINGLE GLASS
SLIDING 2 PANELS



3 RAIL SINGLE GLASS
SLIDING 3 PANELS



3 RAIL SINGLE GLASS
SLIDING 2 PANELS

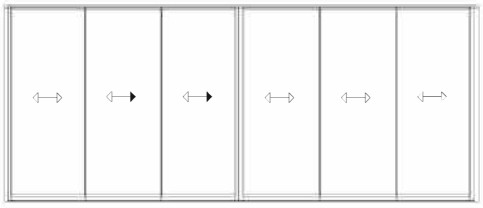

3 RAIL SINGLE GLASS SLIDING
3+3 PANELS

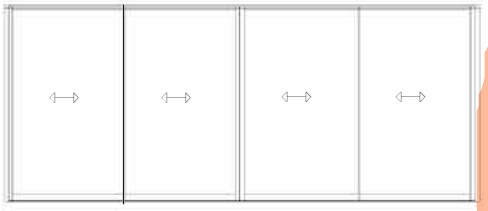

3 RAIL SINGLE GLASS SLIDING
2+2 PANELS

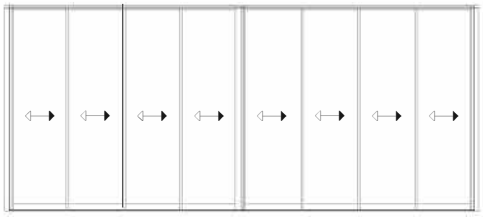

THERMAL SLIDING 4+4 PANELS

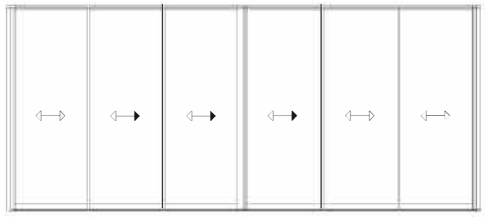

THERMAL SLIDING 3+3 PANELS



THERMAL SLIDING
4 PANELS



THERMAL SLIDING
3 PANELS



THERMAL SLIDING
2 PANELS

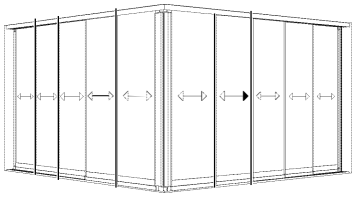

SINGLE GLASS 5+5
EDGE SLIDING

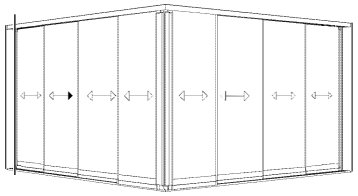

SINGLE GLASS 4+4
EDGE SLIDING

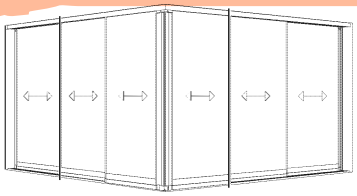

SINGLE GLASS 3+3
EDGE SLIDING

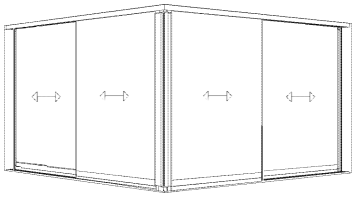

SINGLE GLASS 2+2
EDGE SLIDING



THERMAL GLASS 4+4
EDGE SLIDING



THERMAL GLASS 3+3
EDGE SLIDING



THERMAL GLASS 2+2
EDGE SLIDING

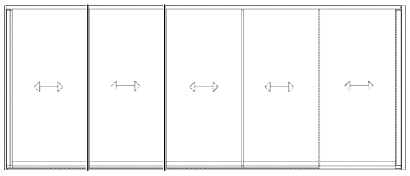

SINGLE GLASS SLIDING MYSTIC
5 PANELS

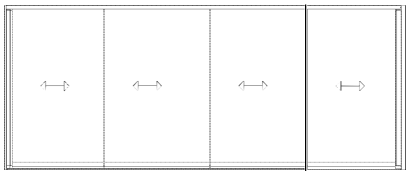

SINGLE GLASS SLIDING MYSTIC
4 PANELS

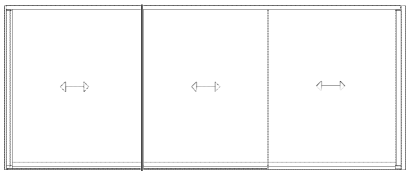

SINGLE GLASS SLIDING MYSTIC
3 PANELS

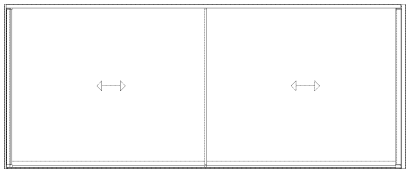

SINGLE GLASS SLIDING MYSTIC
2 PANELS

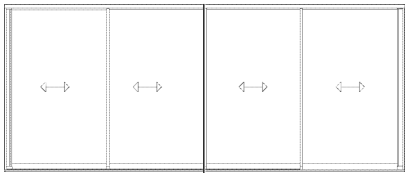

THERMAL GLASS SLIDING MYSTIC
4 PANELS

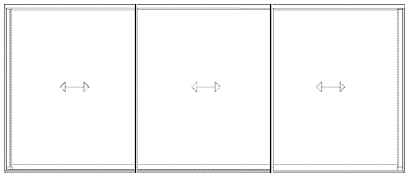

THERMAL GLASS SLIDING MYSTIC
3 PANELS

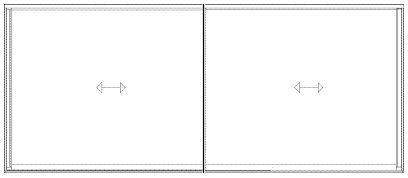

THERMAL GLASS SLIDING MYSTIC
2 PANELS

SINGLE GLASS SLIDING - 3 RAILS PROFILES



M6334

WEIGHT (gr/m) **1530**

M6333

WEIGHT (gr/m) **1064**



M6332

WEIGHT (gr/m) **1553**



M6544

WEIGHT (gr/m) **944**



M6305

WEIGHT (gr/m) **929**



11579

WEIGHT (gr/m) **1056**



11574

WEIGHT (gr/m) **215**



11646

WEIGHT (gr/m) **292**



M6819

WEIGHT (gr/m) **1231**



M6313

WEIGHT (gr/m) **1404**



M6822

WEIGHT (gr/m) **716**



12039

WEIGHT (gr/m) **431**



M6377

WEIGHT (gr/m) **127**

12061

WEIGHT (gr/m) **175**

SINGLE GLASS SLIDING-3 RAIL SECTION DETAILS

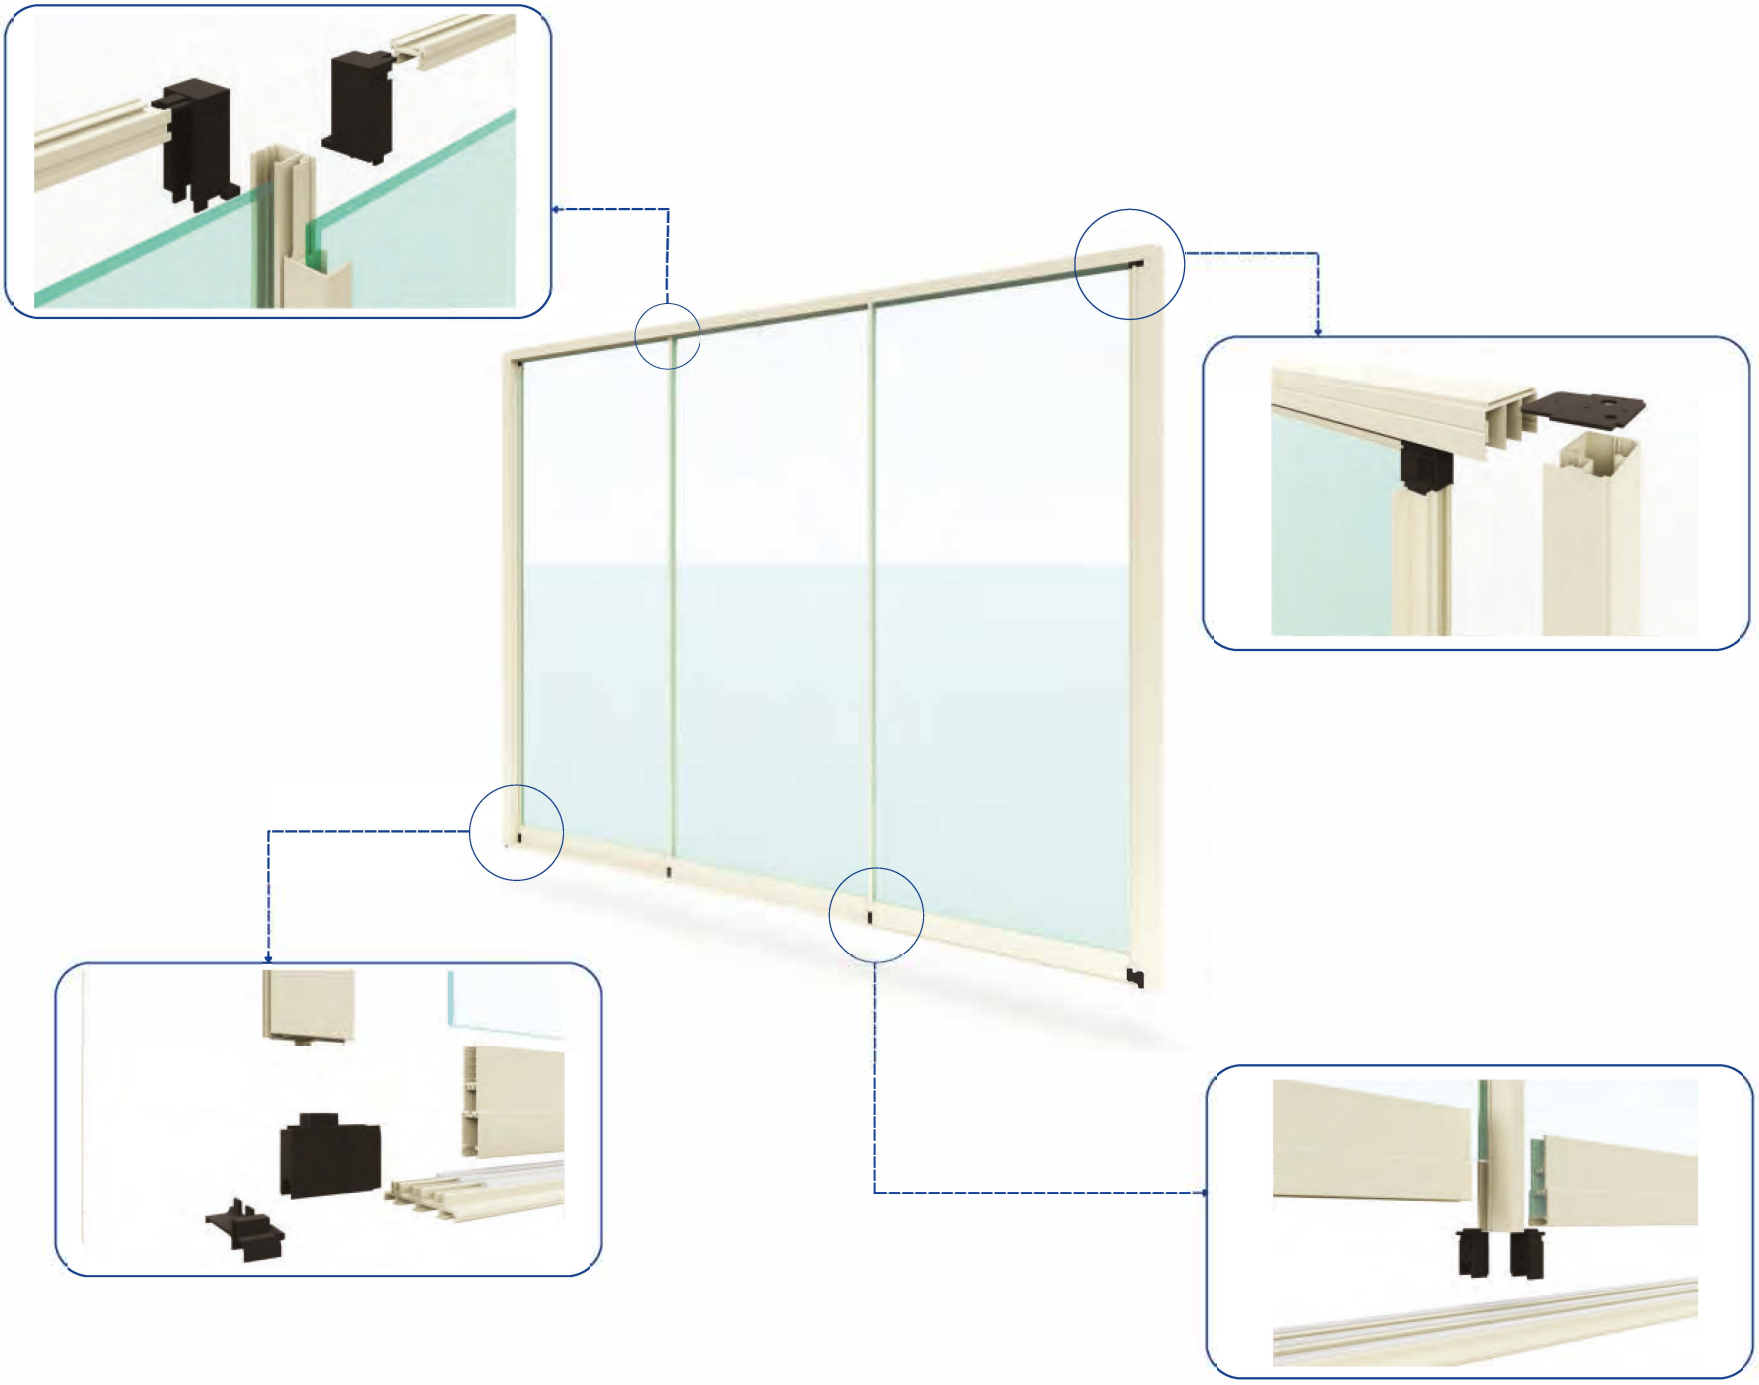

TECHNICAL DETAILS

ALUMINUM: The materials used by EmreAluminyum – aluminum and glass – meet the highest quality and standards. All of the aluminum we use in our systems are made of the first quality T6 6063 alloys at our extrusion facility. Thus, we can control aluminum parameters from raw material to the final product to ensure if the intended rate is achieved or not. Aluminum is not only corrosion-proof and light, but it is also intensively durable, and with these features, it is the best material for Sliding systems.

GLASS: Offers a great deal of light and maximum transparency; it meets the demands of increased energy consciousness and represents an open room design. The choice of single (10 mm) or double glazing (5+12+5 mm) and the type of glass could be laminated or tempered.

WHEEL: Carrier wheels placed at the lower part of panels from two sides. Bearing used inside wheel produced by caster mid and is very suitable for long term usage. Easy to adjust the correct position of wheels on the rail during the installation process thanks to configurable screw heads up to 4.5 mm. There are two options, single and double carrier wheels, which are determined according to the panels' weight level. On top of panels, guide wheels take a position, providing smooth sliding and reducing vibration against wind and impacts.

CHOICE OF COLORS: Various high-quality coating options (QUALICOAT Certified), anodized or wood cover surfaces for aluminum, let customers customize their HUUN Sliding. Besides all, it helps to provide robust durability to aluminum. As an option, it is possible to choose different color options for glasses like OPAC, tinted green, blue, bronze, clear, and reflected.

STAINLESS STEEL RAIL: The top of the lower rail is covered with steel to increase durability against friction and provides a smooth slide while opening and closing panels. The weight of the panels on the ground avoids stress on the upper load-bearing beam while keeping maximum structural stability.

HARDWARE: The painted aluminum handle is placed on a lateral profile located on the abutment on the side of the door. Turning the handle downwards, the counter-thrust lateral profile exercises pressure on the panel, compacting them from the opposite side and improving system resistance and stability apart from impermeability. Standard glass is placed on the first panel.

SEALING: To improve complete protection against wind and rain, there is a standard assembly of sealing gaskets at connection parts of panels.