

## Custom Subnet Masks

### Problem 1

Number of needed subnets **14**  
 Number of needed usable hosts **14**  
 Network Address **192.10.10.0**

Address class C

Default subnet mask 255 . 255 . 255 . 0

Custom subnet mask 255 . 255 . 255 . 240

Total number of subnets 16

Total number of host addresses 16

Number of usable addresses 14

Number of bits borrowed 4

**Show your work for Problem 1 in the space below.**

	256	128	64	32	16	8	4	2	1	Number of Hosts
Number of Subnets	-	2	4	8	16	32	64	128	256	
	128	64	32	16	8	4	2	1	-	Binary values
<b>192 . 10 . 10 . 0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	

Add the binary value numbers to the left of the line to create the custom subnet mask.

128
64
32
+16
240

16
-2
14

Observe the total number of hosts.  
 Subtract 2 for the number of usable hosts.

## Custom Subnet Masks

### Problem 2

Number of needed subnets **1000**  
 Number of needed usable hosts **60**  
 Network Address **165.100.0.0**

Address class B

Default subnet mask 255 . 255 . 0 . 0

Custom subnet mask 255 . 255 . 255 . 192

Total number of subnets 1,024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

**Show your work for Problem 2 in the space below.**

	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2
Number of Hosts																
Number of Subnets	2	4	8	16	32	64	128	256	512	1024	2048	4096	8192	16384	32768	65536
Binary values	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1
	<b>165 . 100 . 0 0 0 0 0 0 0 0 . 0 0 0 0 0 0</b>															

Add the binary value numbers to the left of the line to create the custom subnet mask.

128	128
64	+64
32	192
16	
8	
4	
2	
+1	
255	

64	Observe the total number of hosts.
-2	
62	Subtract 2 for the number of usable hosts.

## Custom Subnet Masks

### Problem 3

/26 indicates the total number of bits used for the network and subnetwork portion of the address. All bits remaining belong to the host portion of the address.

Network Address **148.75.0.0 /26**

Address class B

Default subnet mask 255 . 255 . 0 . 0

Custom subnet mask 255 . 255 . 255 . 192

Total number of subnets 1,024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

Show your work for **Problem 3** in the space below.

	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2
Number of Hosts -																
Number of Subnets -	2	4	8	16	32	64	128	256	512	1024	2048	4096	8192	16384	32768	65536
Binary values -	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1
	148	75	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Add the binary value numbers to the left of the line to create the custom subnet mask.

128	128
64	+64
32	192
16	
8	
4	
2	
+1	
255	

64	Observe the total number of hosts.
-2	
62	Subtract 2 for the number of usable hosts.

1024	
-2	Subtract 2 for the total number of subnets to get the usable number of subnets.
1,022	

## Custom Subnet Masks

### Problem 7

Number of needed subnets **2000**  
 Number of needed usable hosts **15**  
 Network Address **178.100.0.0**

Address class B

Default subnet mask 255.255.0.0

Custom subnet mask 255.255.255.224

Total number of subnets 2048

Total number of host addresses 32

Number of usable addresses 30

Number of bits borrowed 3

Show your work for Problem 7 in the space below.

Number of Hosts	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2
Number of Subnets	2	4	8	16	32	64	128	256	512	1024	2048	4096	8192	16384	32768	65536
Binary values	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1
178 . 100 . 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
128+64+32 = 224																

## Custom Subnet Masks

### **Problem 15**

Number of needed usable hosts **50**

Network Address **172.59.0.0**

Address class     **B**    

Default subnet mask     **255.255.0.0**    

Custom subnet mask     **255.255.255.192**    

Total number of subnets     **1,024**    

Total number of host addresses     **64**    

Number of usable addresses     **62**    

Number of bits borrowed     **10**    

**Show your work for Problem 15 in the space below.**

65,536 32,768 16,384 8,192 4,048 2,048 1,024 512 256 128 64 32 16 8 4 2  
 2 4 8 16 32 64 128 256 512 1,024 2,048 4,048 8,192 16,384 32,768 65,536  
 128 64 32 16 8 4 2 1 . 128 64 32 16 8 4 2 1

$$128 + 64 = 192$$

# Subnetting

## Problem 1

Number of needed subnets **14**

Number of needed usable hosts **14**

Network Address **192.10.10.0**

Address class C

Default subnet mask 255 . 255 . 255 . 0

Custom subnet mask 255 . 255 . 255 . 240

Total number of subnets 16

Total number of host addresses 16

Number of usable addresses 14

Number of bits borrowed 4

What is the 4th subnet range? 192.10.10.48 to 192.10.10.63

What is the subnet number for the 8th subnet? 192 . 10 . 10 . 112

What is the subnet broadcast address for the 13th subnet? 192 . 10 . 10 . 207

What are the assignable addresses for the 9th subnet? 192.10.10.129 to 192.10.10.142

Show your work for Problem 1 in the space below.

Number of Subnets	256	128	64	32	16	8	4	2	-	Number of Hosts
	2	4	8	16	32	64	128	256		
	128	64	32	16	8	4	2	1	-	Binary values
192. 10 . 10 . 0	0	0	0	0	0	0	0	0	0	
(0)	0	0	0	0	192.10.10.0	to	192.10.10.15			
(1)	0	0	0	1	192.10.10.16	to	192.10.10.31			
(2)	0	0	1	0	192.10.10.32	to	192.10.10.47			
(3)	0	0	1	1	192.10.10.48	to	192.10.10.63			
(4)	0	1	0	0	192.10.10.64	to	192.10.10.79			
(5)	0	1	0	1	192.10.10.80	to	192.10.10.95			
(6)	0	1	1	0	192.10.10.96	to	192.10.10.111			
(7)	0	1	1	1	192.10.10.112	to	192.10.10.127			
(8)	1	0	0	0	192.10.10.128	to	192.10.10.143			
(9)	1	0	0	1	192.10.10.144	to	192.10.10.159			
(10)	1	0	1	0	192.10.10.160	to	192.10.10.175			
(11)	1	0	1	1	192.10.10.176	to	192.10.10.191			
(12)	1	1	0	0	192.10.10.192	to	192.10.10.207			
(13)	1	1	0	1	192.10.10.208	to	192.10.10.223			
(14)	1	1	1	0	192.10.10.224	to	192.10.10.239			
(15)	1	1	1	1	192.10.10.240	to	192.10.10.255			

$$\begin{array}{r}
 128 \\
 64 \\
 32 \\
 +16 \\
 \hline
 \text{Custom subnet mask } 240
 \end{array}$$

$$\begin{array}{r}
 16 \\
 -2 \\
 \hline
 \text{Usable subnets } 14
 \end{array}$$

$$\begin{array}{r}
 16 \\
 -2 \\
 \hline
 \text{Usable hosts } 14
 \end{array}$$

The binary value of the last bit borrowed is the range. In this problem the range is 16.

The first address in each subnet range is the subnet number.

The last address in each subnet range is the subnet broadcast address.

## Subnetting

### Problem 2

Number of needed subnets **1000**

Number of needed usable hosts **60**

Network Address **165.100.0.0**

Address class B

Default subnet mask 255 . 255 . 0 . 0

Custom subnet mask 255 . 255 . 255 . 192

Total number of subnets 1,024

Total number of host addresses 64

Number of usable addresses 62

Number of bits borrowed 10

What is the 15th subnet range? 165.100.3.128 to 165.100.3.191

What is the subnet number for the 6th subnet? 165 . 100 . 1 . 64

What is the subnet broadcast address for the 6th subnet? 165 . 100 . 1 . 127

What are the assignable addresses for the 9th subnet? 165.100.2.1 to 165.100.0.62



Show your work for Problem 2 in the space below.

Number of Hosts	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2
Number of Subnets	2	4	8	16	32	64	128	256	512	1024	2048	4096	8192	16384	32768	65536
Binary values	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1
	165	100	0	0	0	0	0	0	0	0	0	0	0	0	0	0

							(0)	0	165.100.0.0	to	165.100.0.63
							(1)	1	165.100.0.64	to	165.100.0.127
	64	128					(2)	1 0	165.100.0.128	to	165.100.0.191
Usable	-2	64					(3)	1 1	165.100.0.192	to	165.100.0.255
hosts	62	32					(4)	1 0 0	165.100.1.0	to	165.100.1.63
		16					(5)	1 0 1	165.100.1.64	to	165.100.1.127
		8					(6)	1 1 0	165.100.1.128	to	165.100.1.191
Custom	128	4					(7)	1 1 1	165.100.1.192	to	165.100.1.255
subnet mask	+64	2					(8)	1 0 0 0	165.100.2.0	to	165.100.2.63
	192	+1					(9)	1 0 0 1	165.100.2.64	to	165.100.2.127
		255					(10)	1 0 1 0	165.100.2.128	to	165.100.2.191
							(11)	1 0 1 1	165.100.2.192	to	165.100.2.255
							(12)	1 1 0 0	165.100.3.0	to	165.100.3.63
							(13)	1 1 0 1	165.100.3.64	to	165.100.3.127
							(14)	1 1 1 0	165.100.3.128	to	165.100.3.191
							(15)	1 1 1 1	165.100.3.192	to	165.100.3.255

The binary value of the last bit borrowed is the range. In this problem the range is 64.

The first address in each subnet range is the subnet number.

The last address in each subnet range is the subnet broadcast address.

Down to

(1022)	1	1	1	1	1	1	1	1	1	0	165.100.255.128	to	165.100.255.191
(1023)	1	1	1	1	1	1	1	1	1	1	165.100.255.192	to	165.100.255.255

## Subnetting

### **Problem 11**

Number of needed usable hosts **8,000**

Network Address **135.70.0.0**

Address class \_\_\_\_\_

Default subnet mask \_\_\_\_\_

Custom subnet mask \_\_\_\_\_

Total number of subnets \_\_\_\_\_

Total number of host addresses \_\_\_\_\_

Number of usable addresses \_\_\_\_\_

Number of bits borrowed \_\_\_\_\_

What is the 6th  
subnet range? \_\_\_\_\_

What is the subnet number  
for the 7th subnet? \_\_\_\_\_

What is the subnet  
broadcast address for  
the 3rd subnet? \_\_\_\_\_

What are the assignable  
addresses for the 5th  
subnet? \_\_\_\_\_

Show your work for Problem 11 in the space below.

## Subnetting

### **Problem 12**

Number of needed usable hosts **45**

Network Address **198.125.50.0**

Address class \_\_\_\_\_

Default subnet mask \_\_\_\_\_

Custom subnet mask \_\_\_\_\_

Total number of subnets \_\_\_\_\_

Total number of host addresses \_\_\_\_\_

Number of usable addresses \_\_\_\_\_

Number of bits borrowed \_\_\_\_\_

What is the 2nd  
subnet range? \_\_\_\_\_

What is the subnet number  
for the 2nd subnet? \_\_\_\_\_


What is the subnet  
broadcast address for  
the 4th subnet? \_\_\_\_\_

What are the assignable  
addresses for the 3rd  
subnet? \_\_\_\_\_

Show your work for Problem 12 in the space below.

# Practical Subnetting 1

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 100% growth in both areas. Circle each subnet on the graphic and answer the questions below.

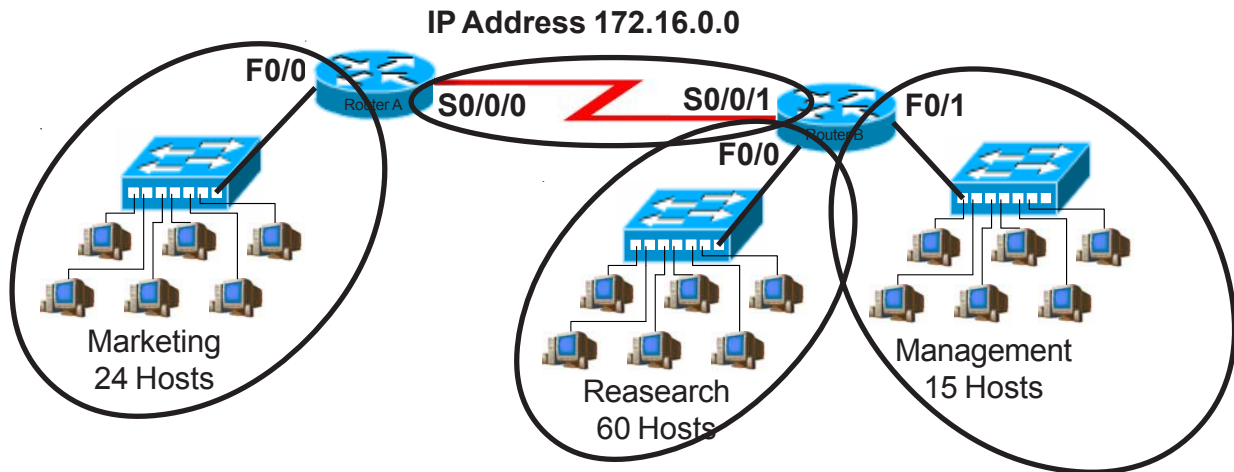

Address class	<u>B</u>
Custom subnet mask	<u>255.255.224.0</u>
Minimum number of subnets needed	<u>4</u>
Extra subnets required for 100% growth (Round up to the next whole number)	<u>+ 4</u>
Total number of subnets needed	<u>= 8</u>
Number of host addresses in the largest subnet group	<u>60</u>
Number of addresses needed for 100% growth in the largest subnet (Round up to the next whole number)	<u>+ 60</u>
Total number of address needed for the largest subnet	<u>= 120</u>

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Research	<u>172.16.0.0 to 172.31.255</u>
IP address range for Marketing	<u>172.16.32.0 to 172.63.255</u>
IP address range for Management	<u>172.16.64.0 to 172.95.255</u>
IP address range for Router A to Router B serial connection	<u>172.16.96.0 to 172.127.255</u>

**Show your work for Practical Subnetting 1 in the space below.**

	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2
Number of Hosts	65,536	32,768	16,384	8,192	4,096	2,048	1,024	512	256	128	64	32	16	8	4	2
Number of Subnets	2	4	8	16	32	64	128	256	512	1024	2048	4096	8192	16384	32768	65536
Binary values	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1
	172	16	0	0	0	0	0	0	0	0	0	0	0	0	0	0

(0)	0	172.16.0.0	to	172.16.31.255
(1)	1	172.16.32.0	to	172.16.63.255
(2)	1 0	172.16.64.0	to	172.16.95.255
(3)	1 1	172.16.96.0	to	172.16.127.255
(4)	1 0 0	172.16.128.0	to	172.16.159.255
(5)	1 0 1	172.16.160.0	to	172.16.191.255
(6)	1 1 0	172.16.192.0	to	172.16.223.255
(7)	1 1 1	172.16.224.0	to	172.16.255.255

4

x 1.0

4


60

x 1.0

60

## Practical Subnetting 2

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of hosts per subnet**, and allow enough extra subnets and hosts for 30% growth in all areas. Circle each subnet on the graphic and answer the questions below.

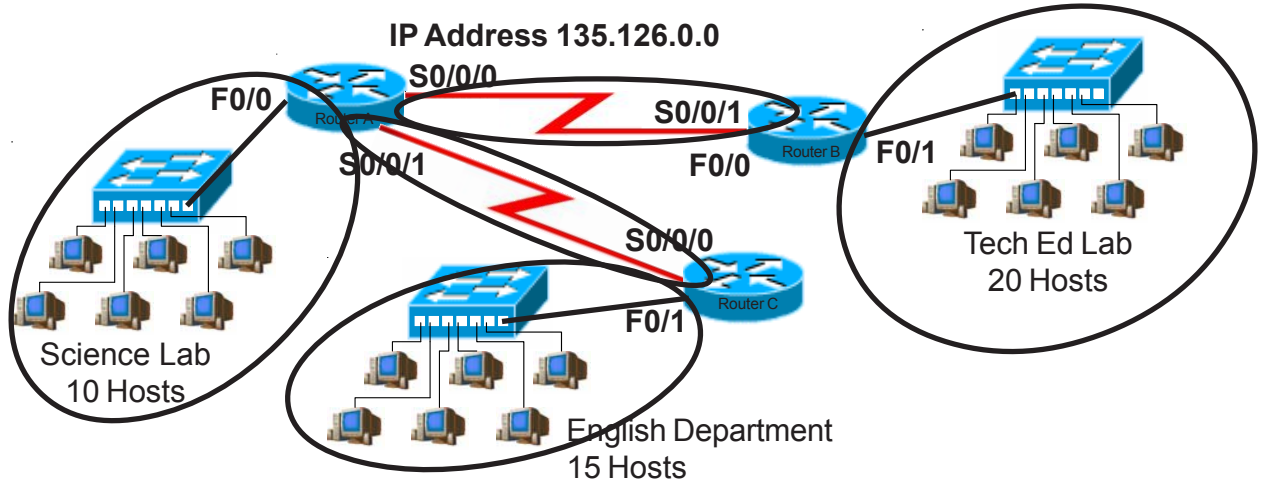

Address class	<u>B</u>
Custom subnet mask	<u>255.255.255.224</u>
Minimum number of subnets needed	<u>5</u>
Extra subnets required for 30% growth (Round up to the next whole number)	<u>+ 2</u>
Total number of subnets needed	<u>= 7</u>
Number of host addresses in the largest subnet group	<u>20</u>
Number of addresses needed for 30% growth in the largest subnet (Round up to the next whole number)	<u>+ 6</u>
Total number of address needed for the largest subnet	<u>= 26</u>

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Tech Ed	<u>135.126.0.0 to 135.126.0.31</u>
IP address range for English	<u>135.126.0.32 to 135.126.0.63</u>
IP address range for Science	<u>135.126.0.64 to 135.126.0.95</u>
IP address range for Router A to Router B serial connection	<u>135.126.0.96 to 135.126.0.127</u>
IP address range for Router A to Router C serial connection	<u>135.126.0.128 to 135.126.0.159</u>



Show your work for Problem 2 in the space below.

Number of Hosts	1	2	4	8	16	32	64	128	256	512	1024	2048	4096	8192	16384	32768	65536
Number of Subnets	1	2	4	8	16	32	64	128	256	512	1024	2048	4096	8192	16384	32768	65536
Binary values	128	64	32	16	8	4	2	1	128	64	32	16	8	4	2	1	1
	135	126	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

$$\begin{array}{r} 5 \\ \times 3 \\ \hline 15 \end{array}$$


(Round up to 2)

$$\begin{array}{r} 20 \\ \times 3 \\ \hline 6 \end{array}$$

(0)	.	0	135.126.0.0	to	135.126.0.31
(1)		1	135.126.0.32	to	135.126.0.63
(2)		1 0	135.126.0.64	to	135.126.0.95
(3)		1 1	135.126.0.96	to	135.126.0.127
(4)		1 0 0	135.126.0.128	to	135.126.0.159
(5)		1 0 1	135.126.0.160	to	135.126.0.191
(6)		1 1 0	135.126.0.192	to	135.126.0.223
(7)		1 1 1	135.126.0.224	to	135.126.0.255
(8)	1	0 0 0	135.126.1.0	to	135.126.1.31
(9)	1 .	0 0 1	135.126.1.32	to	135.126.1.63
(10)	1 .	0 1 0	135.126.1.64	to	135.126.1.95
(11)	1 .	0 1 1	135.126.1.96	to	135.126.1.127
(12)	1 .	1 0 0	135.126.1.128	to	135.126.1.159
(13)	1 .	1 0 1	135.126.1.160	to	135.126.1.191
(14)	1 .	1 1 0	135.126.1.192	to	135.126.1.223
(15)	1 .	1 1 1	135.126.1.224	to	135.126.1.255

## Practical Subnetting 4

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 70% growth in all areas. Circle each subnet on the graphic and answer the questions below.

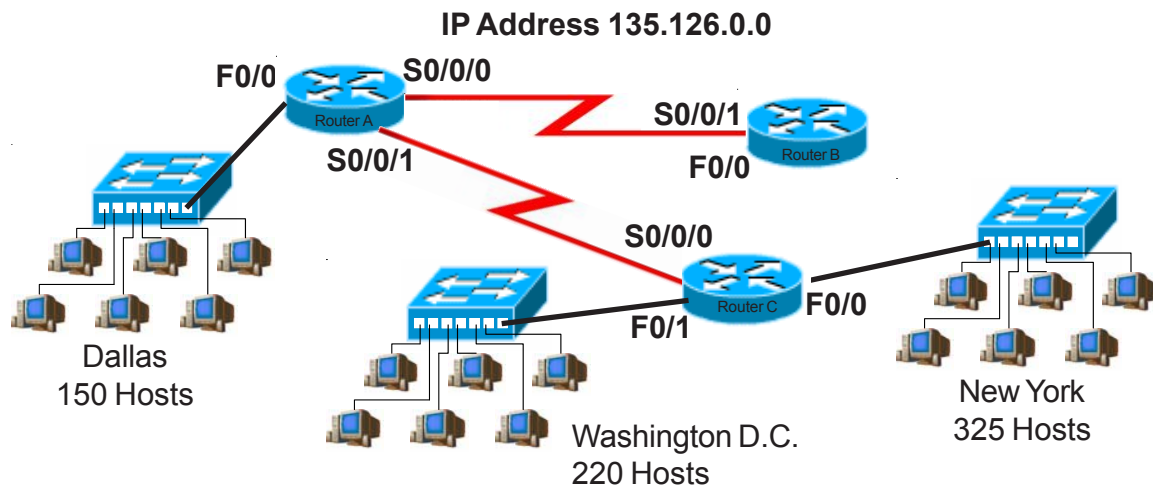

Address class \_\_\_\_\_

Custom subnet mask \_\_\_\_\_

Minimum number of subnets needed \_\_\_\_\_

Extra subnets required for 70% growth  $+$  \_\_\_\_\_  
(Round up to the next whole number)

Total number of subnets needed  $=$  \_\_\_\_\_

Number of host addresses  
in the largest subnet group \_\_\_\_\_

Number of addresses needed for  
70% growth in the largest subnet  $+$  \_\_\_\_\_  
(Round up to the next whole number)

Total number of address  
needed for the largest subnet  $=$  \_\_\_\_\_

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for New York \_\_\_\_\_

IP address range for Washington D. C. \_\_\_\_\_

IP address range for Dallas \_\_\_\_\_


IP address range for Router A  
to Router B serial connection \_\_\_\_\_

IP address range for Router A  
to Router C serial connection \_\_\_\_\_

Show your work for Problem 4 in the space below.

## Practical Subnetting 6

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 20% growth in all areas. Circle each subnet on the graphic and answer the questions below.

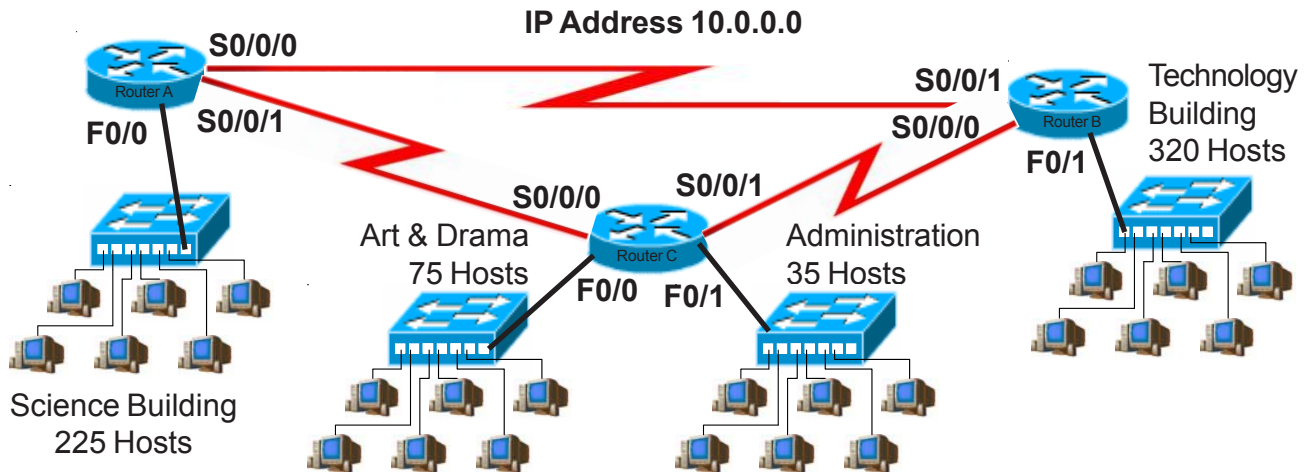

Address class \_\_\_\_\_

Custom subnet mask \_\_\_\_\_

Minimum number of subnets needed \_\_\_\_\_

Extra subnets required for 20% growth  $+$  \_\_\_\_\_  
(Round up to the next whole number)

Total number of subnets needed  $=$  \_\_\_\_\_

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Technology \_\_\_\_\_

IP address range for Science \_\_\_\_\_

IP address range for Arts & Drama \_\_\_\_\_

IP Address range Administration \_\_\_\_\_

IP address range for Router A  
to Router B serial connection \_\_\_\_\_

IP address range for Router A  
to Router C serial connection \_\_\_\_\_

IP address range for Router B  
to Router C serial connection \_\_\_\_\_

Show your work for Problem 6 in the space below.