


DIN Rail / KDK / KDK2.5

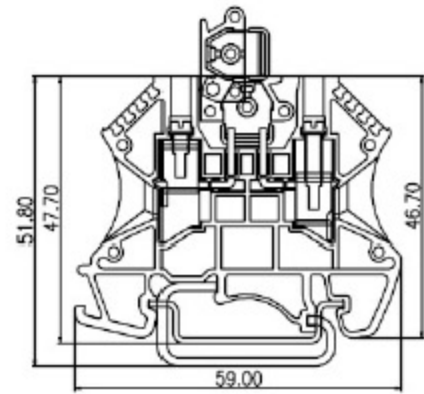

Specification/Accessory explanation

T x H x W (+02mm) 5.1 x 46.7 x 59

Approval		
Technical Data	UL	IEC
Rated voltage	300V	800V
Rated current	10A	16A
Wire range		2.5mm ²
Solid wire (AWG)	26~14	
Stranded wire (AWG)	26~14	
Insulation withstand voltage		6KV
Torque (Lb-in)		7
Screw		M3
Wire strip length		7~10mm

Accessory name	Accessory type	Accessory name	Accessory type
End cover	DK2.5C	Partition	DKSPS-002
Cross jumper-cageinserting type	CSC-2.5 02P	Cross jumper-cageinserting type	CSC-2.5 03P
Cross jumper-cageinserting type	CSC-2.5 10P	Marking label	TM08
Suitable rail	TS-35	Suitable rail	TS-32
Tool	SDM3.0		