




DIN Rail / GK / GK50

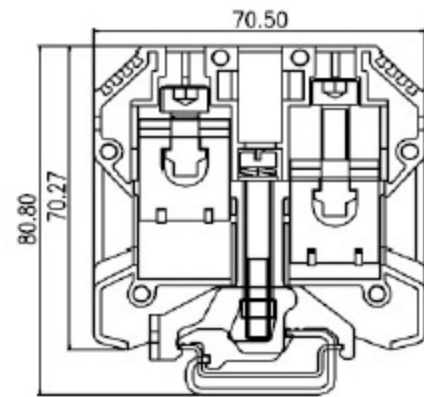

Specification/Accessory explanation

T x H x W (+ 02mm) 20 X 70.27 X 70.5

Approval	 	
Technical Data	UL	IEC
Rated voltage		
Rated current	150A	
Wire range	50mm ²	
Solid wire (AWG)	6~1/10	
Stranded wire (AWG)	6~1/10	
Insulation withstand voltage	8KV	
Torque (Lb-in)	49.5	
Screw	M6	
Wire strip length	20~25mm	

Accessory name	Accessory type	Accessory name	Accessory type
Cross jumper-cageinserting type	CSC-50 02P	Cross jumper-cageinserting type	CSC-50 03P
Cross jumper-cageinserting type	CSC-50 10P	Marking label	TM12
Suitable rail	TS-35	Suitable rail	TS-32
Tool	SDM6.5		