





# DIN Rail / UDK / UDK1.5

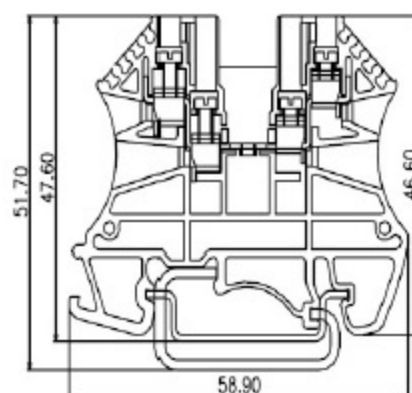

## Specification/Accessory explanation

T x H x W ( + 02mm ) 5.1 x 46.6 x 58.9

Approval	  	
Technical Data	UL	IEC
Rated voltage	600V	630V
Rated current	10A	17.5A
Wire range		1.5mm <sup>2</sup>
Solid wire (AWG)	22~14	
Stranded wire (AWG)	22~14	
Insulation withstand voltage		6KV
Torque (Lb-in)		3.5
Screw		M2.5
Wire strip length		6~7mm
Optional Color	Cat. No.	



UDK1.5-RD



UDK1.5-BL



UDK1.5-BK



UDK1.5-OR

Accessory name	Accessory type	Accessory name	Accessory type
End cover	UDK1.5C	Cross jumper-central type	DS2.5 02P
Cross jumper-central type	DS2.5 03P	Cross jumper-central type	DS2.5 10P
Cross jumper-cageinserting type	CSC-2.5 02P	Cross jumper-cageinserting type	CSC-2.5 03P
Cross jumper-cageinserting type	CSC-2.5 10P	Marking label	TM08
Suitable rail	TS-35	Suitable rail	TS-32
Tool	SDM3.0		