



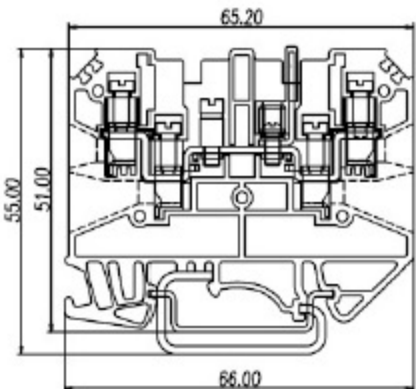


DIN Rail / UDK / UDK4

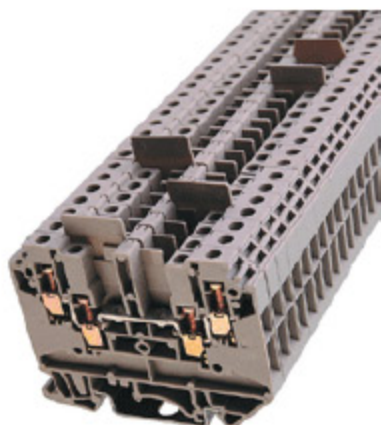

Specification/Accessory explanation

T x H x W ( + 02mm ) 7.6 x 55 x 66

Approval	  	
Technical Data	UL	IEC
Rated voltage	300V	630
Rated current	16A	26A
Wire range		4mm <sup>2</sup>
Solid wire (AWG)	24~12	
Stranded wire (AWG)	24~12	
Insulation withstand voltage		6KV
Torque (Lb-in)		
Screw		
Wire strip length		6~7mm
Optional Color	Cat. No.	



UDK4-RD



UDK4-BL



UDK4-BK



UDK4-OR

Accessory name	Accessory type	Accessory name	Accessory type
End cover	UDK4C	Small partition	DKSPS-007
Cross jumper-central type	DS4 02P	Cross jumper-central type	DS4 03P
Cross jumper-central type	DS4 10P	Cross jumper-cageinserting type	CSC-4 02P
Cross jumper-cageinserting type	CSC-4 03P	Cross jumper-cageinserting type	CSC-4 10P
Marking label	TM09	Suitable rail	TS-35
Suitable rail	TS-32	Tool	SDM3.0