



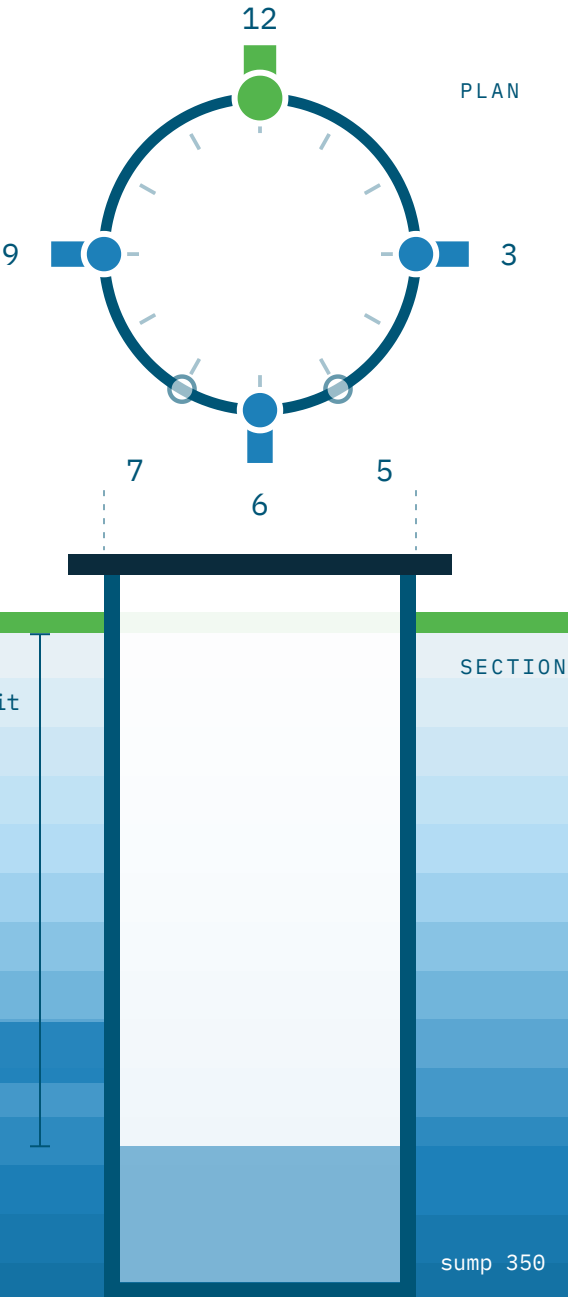


EVERY DROP,
ACCOUNTED FOR.

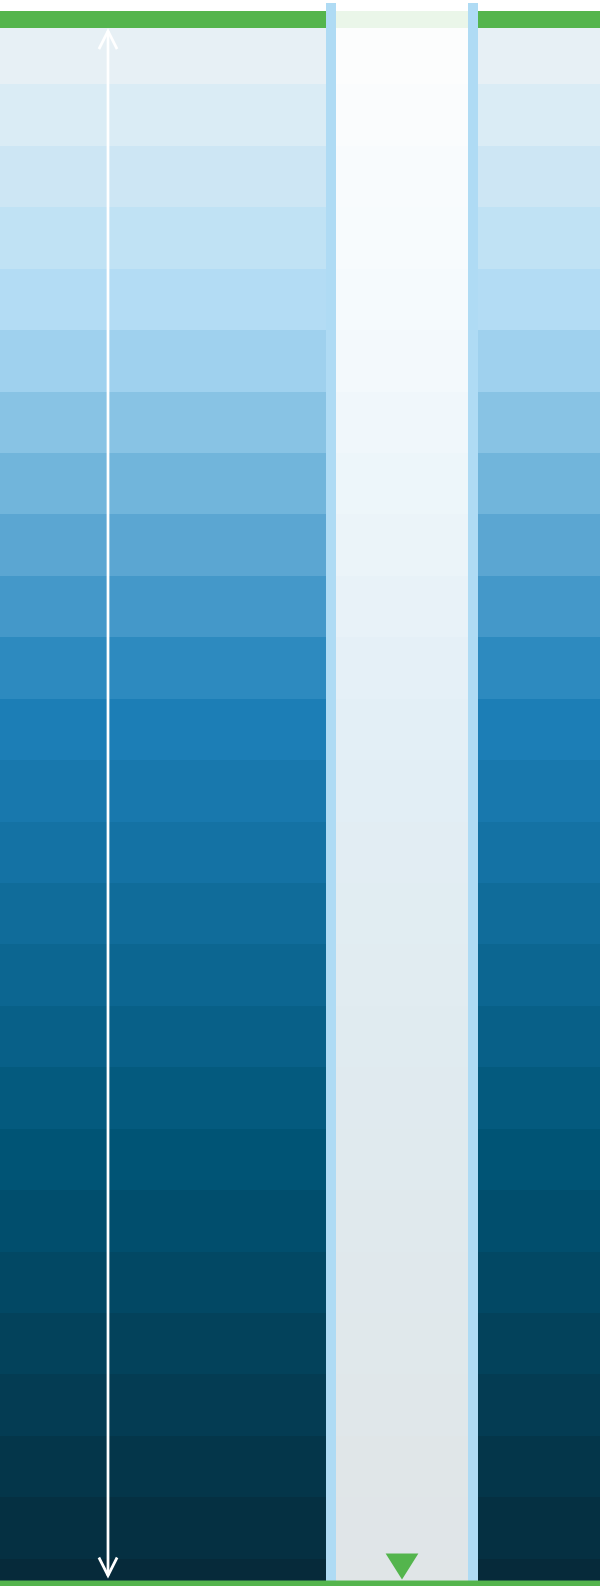


READ IT TOP TO BOTTOM

Chapters sit at depths, not page numbers. The gauge on the right edge of every page shows how far down you are, from ground level to the sump.

0	GROUND LEVEL	01
500	THE LOGO	05
1000	COLOUR	10
1500	TYPE	15
2000	VOICE	19
2500	GRAPHIC DEVICES	22
3000	PHOTOGRAPHY	25
3500	THE RHINO RANGE	30
4000	ON SCREEN	32
4500	IN PRINT	36
5000	MADE THINGS	39
5500	MOTION	41
6000	THE FILES	42
+350	THE SUMP	43




THE DROP IS ALREADY A SECTION

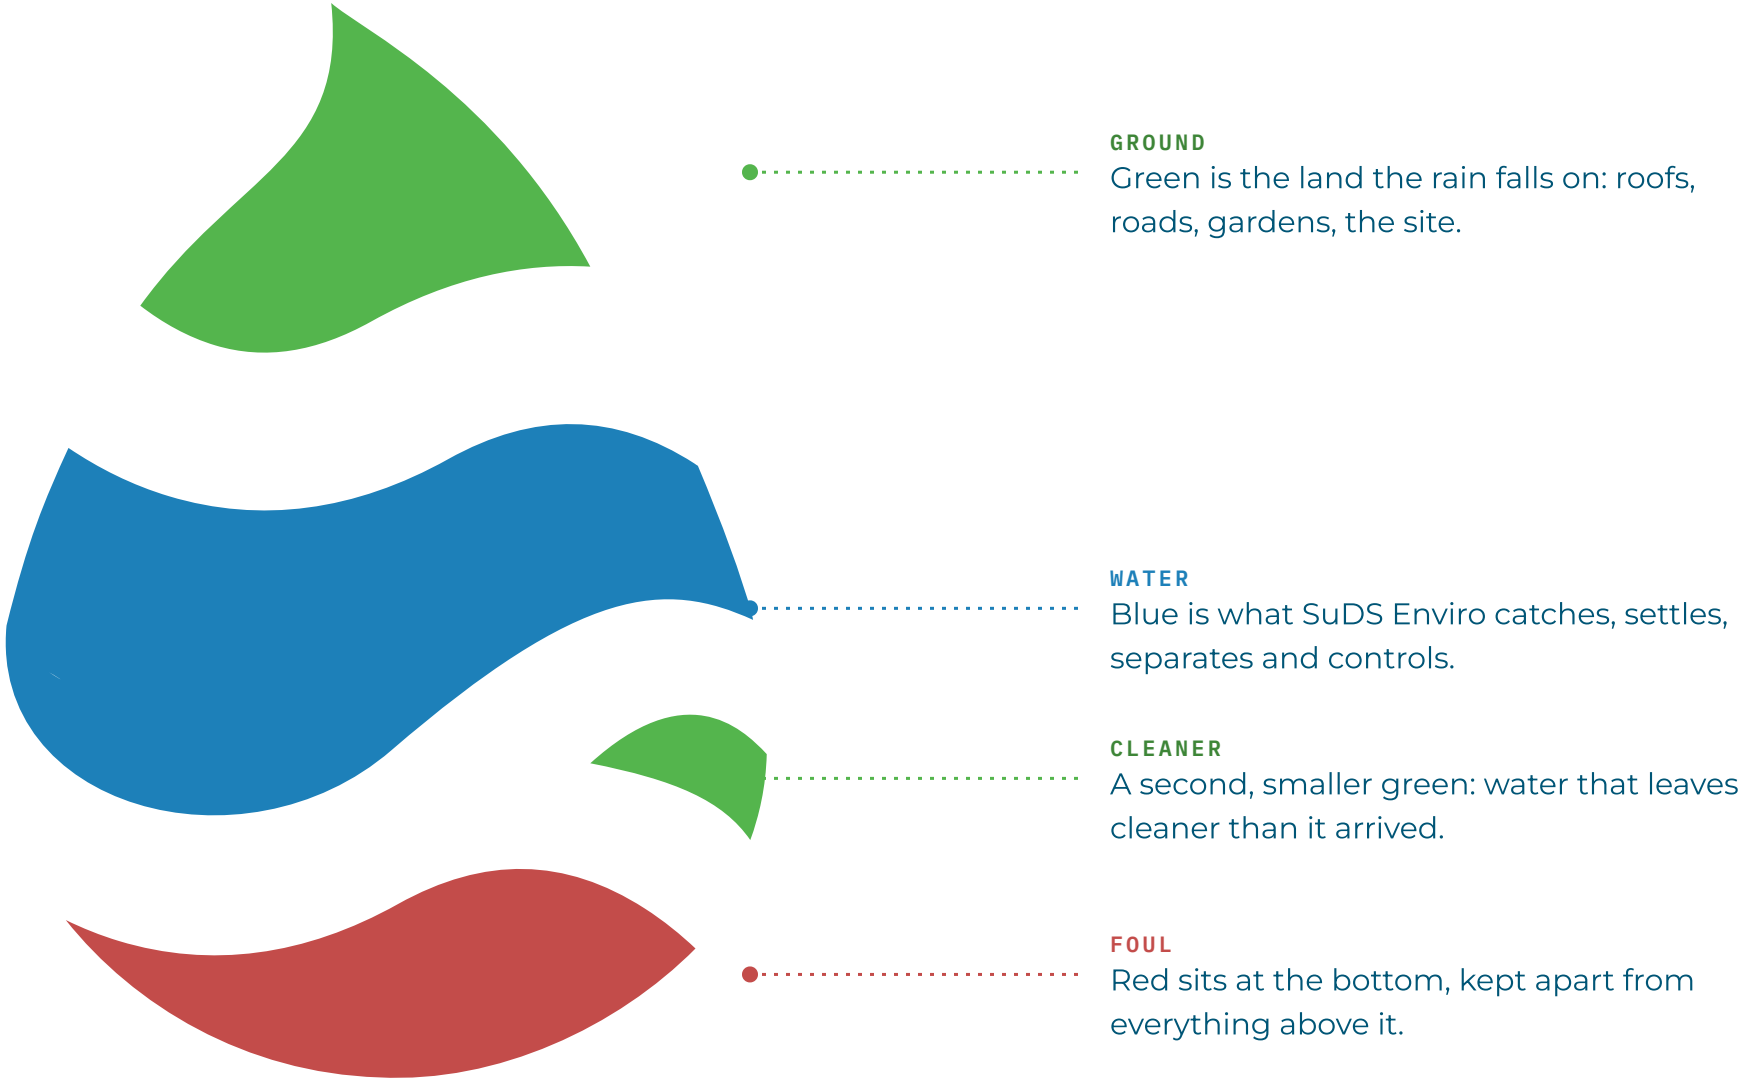


Cut through any SuDS Enviro product and you get the same picture as the drop: ground on top, water in the middle, foul kept below. Everything the company makes lives under the turf line, and it is specified by depth, diameter and clock position.

So the identity is drawn the way the products are drawn: **in section**. This is our reading of the mark, not its origin story. The mark itself does not change.



ONE IDEA, **FOUR JOBS**


An idea only earns its place if it can do all four of these at once. The section does.

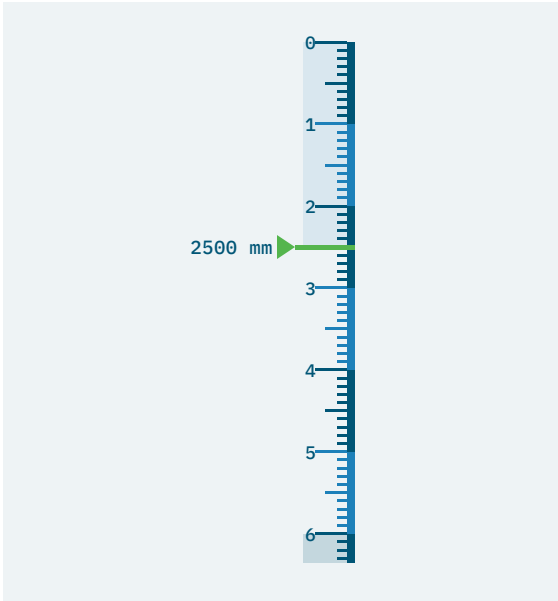

01 / Device

A GAUGE AND A CUT

A river staff gauge on every page, and a cut through the ground on every chapter opener. Both are measured, never decorative.

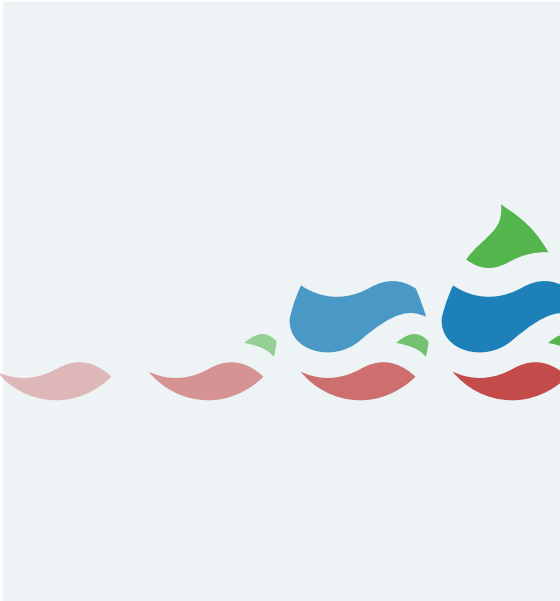

02 / Motion

SETTLE, THEN RISE

The drop builds the way silt settles: bottom band first, top band last. Then the wordmark rises into place. Nothing spins.



03 / Structure

CHAPTERS AT DEPTH


The book runs from ground level to the sump. Each chapter sits 500 mm below the last, on the same scale the configurator uses.



04 / A line

SOMETHING PEOPLE SAY

Every drop, accounted for. Said by an engineer it means the maths works. Said by a site manager it means nothing gets missed.





500 mm

THE LOGO


SuDS Enviro already has a strong family of marks. This chapter sets the rules for using them. It does not redraw them.

MARK	USE IT FOR
Stacked, with slogan	Covers, the website hero, the first page of anything.
Horizontal	Headers, footers, email signatures, vans, title blocks.
SuDS RHINO lockup	Anything about the product range rather than the company.
The drop	App icons, avatars, favicons, the seal, small spaces.


All four are SuDS Enviro's own artwork, taken from the master files on the live site. Vector masters exist for the horizontal and RHINO lockups; the stacked lockup is held as a PNG only.



The drop, lifted from the horizontal master. Use it where the name is already said.

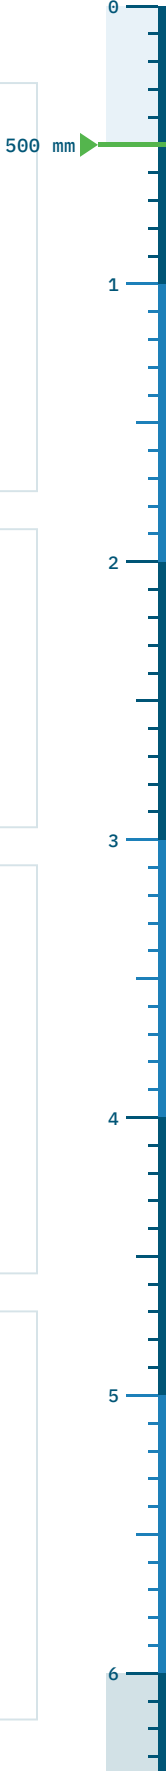

HALF A DROP OF CLEAR SPACE

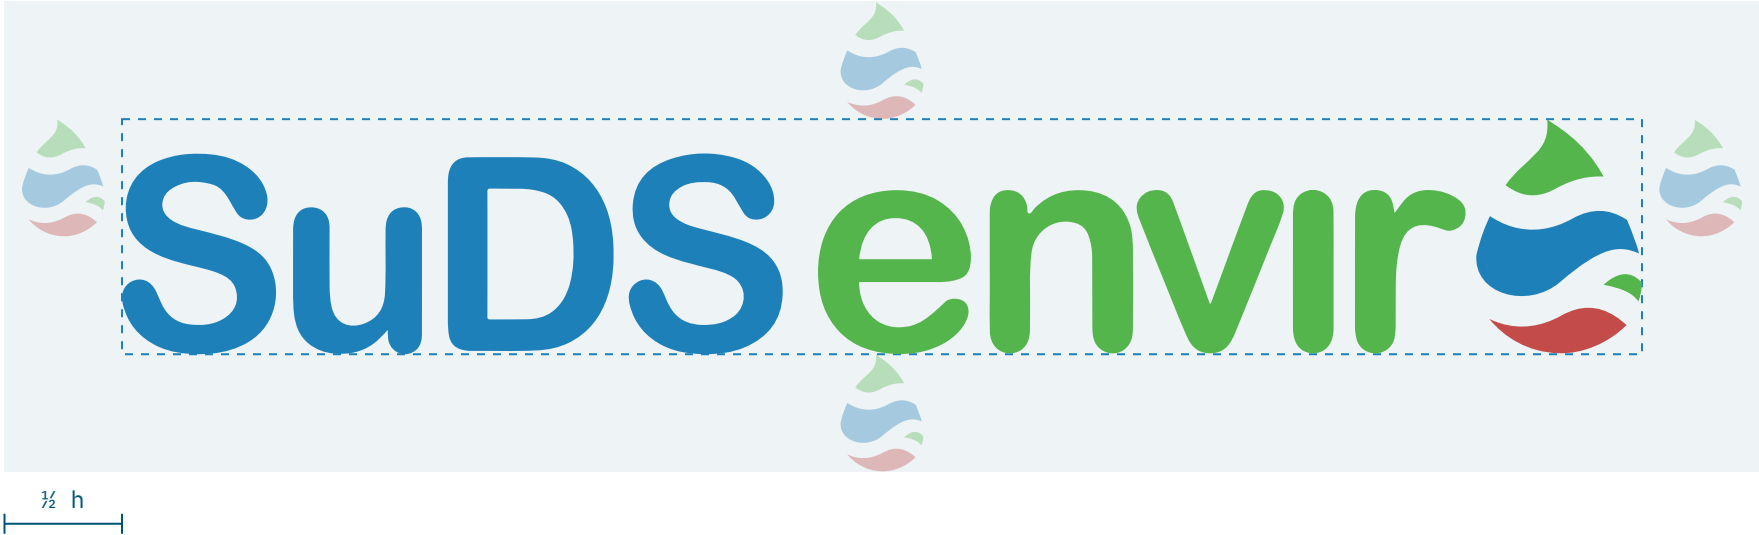


Clear space is half the height of the drop, on every side. In the horizontal lockup the drop is the full height of the logo, so the rule is simply half the logo's height. Nothing else, not even a page edge, comes inside it.

Measure from the master artwork, not from a screenshot with padding.

MARK	PRINT, MIN WIDTH	SCREEN, MIN WIDTH
Horizontal	35 mm	140 px
Stacked, with slogan	30 mm	120 px
SuDS RHINO lockup	30 mm	120 px
The drop	6 mm tall	24 px tall
Clockwork seal	20 mm	80 px


Below the stacked minimum the slogan stops being readable. Switch to the horizontal lockup instead of shrinking further.

SIX WAYS TO SET IT

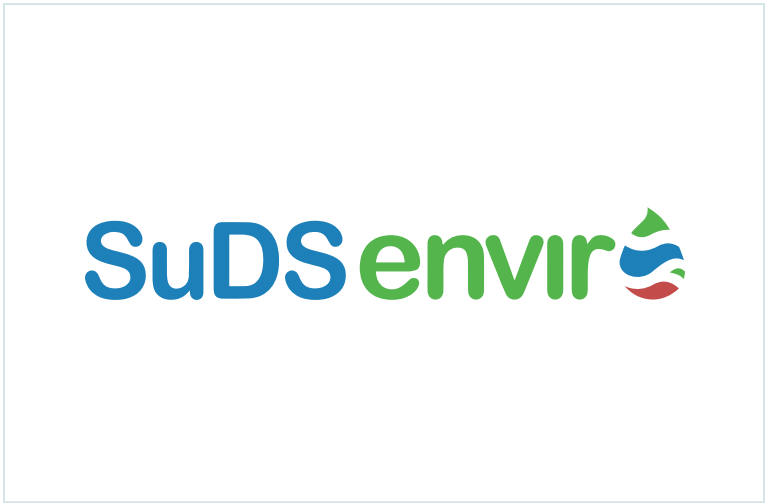


FULL COLOUR ON PAPER

The default. Use it whenever the ground allows.

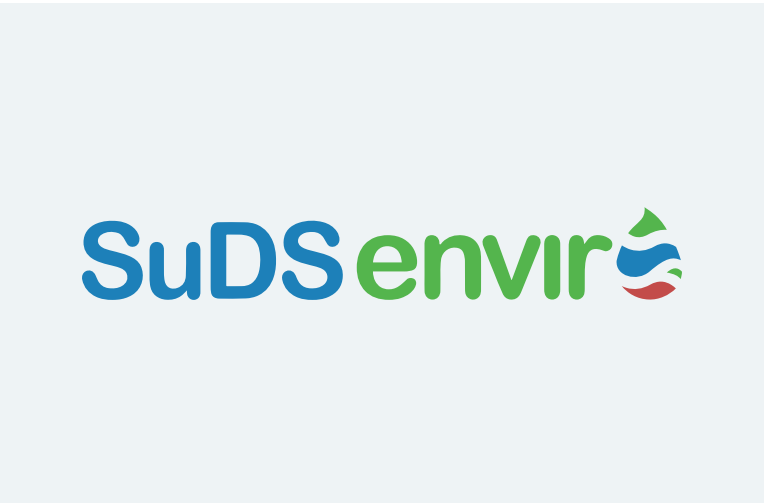


FULL COLOUR ON SURFACE

Data sheets, the website, catalogue pages.

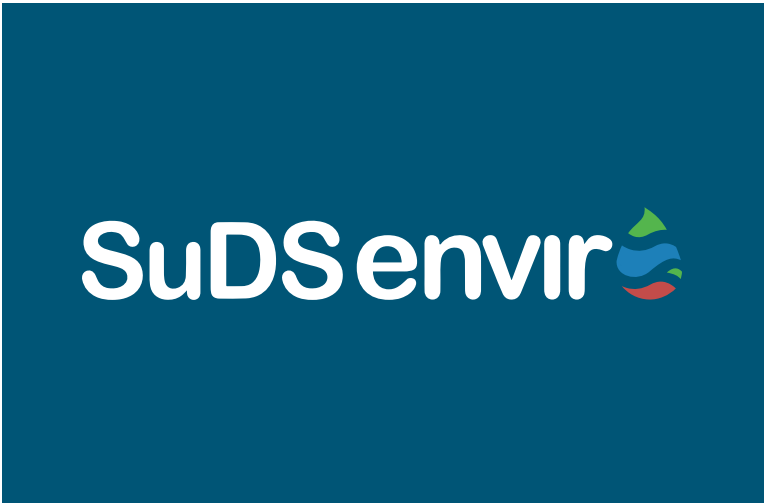

REVERSED ON DEEP


Navigation bars, van sides, hoardings.

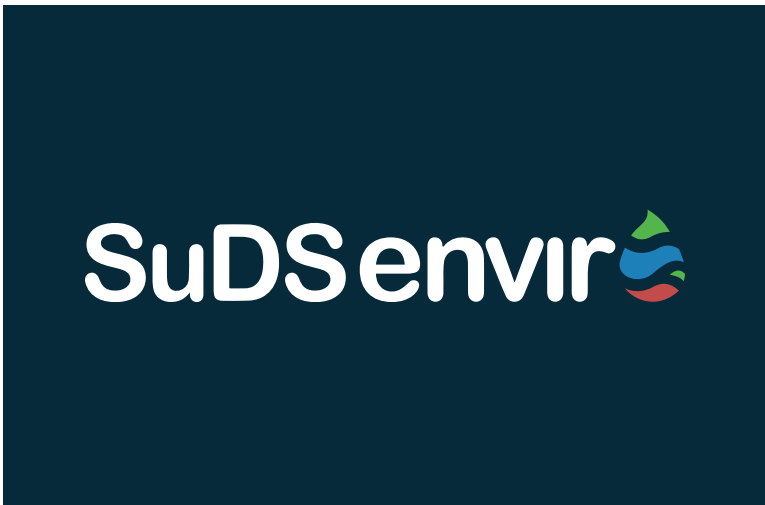

REVERSED ON INVERT

Foul water material and night-time pieces.

Reversed keeps the drop in full colour and turns the letters white, as the live site does. Black, one colour, is kept for engraving and laser marking only (see Made things).

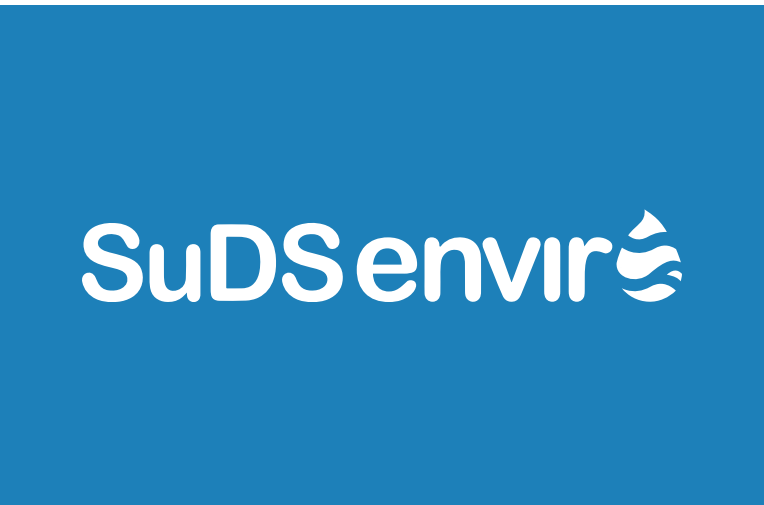


WHITE ON BLUE

Buttons and banners in the brand blue.



DEEP, ONE COLOUR

One-colour print, stamps, tape.

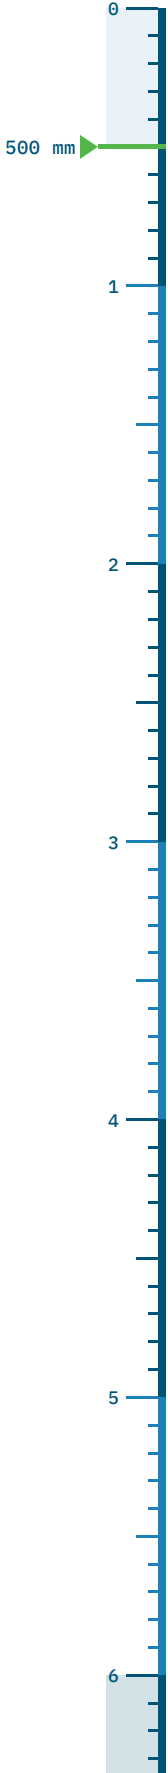

IT SETTLES. IT NEVER SPINS.



WHAT MOVES

- The bands arrive from above and settle bottom first, red then the small green, blue, and the top green last. The way silt settles in a sump.
- The wordmark rises 8 px into place once the drop is complete.
- Ease out on every move. 220 ms between bands.



WHAT NEVER MOVES

- The drop never rotates, tilts, wobbles or splashes.
- The bands never change order or colour. Red is always at the bottom.
- The letters never animate one by one.

Use the drop alone only where the name is already said
nearby: app icon, avatar, favicon, the centre of the seal.

500 MM / PLEASE DON'T


EIGHT THINGS WE HAVE SEEN HAPPEN

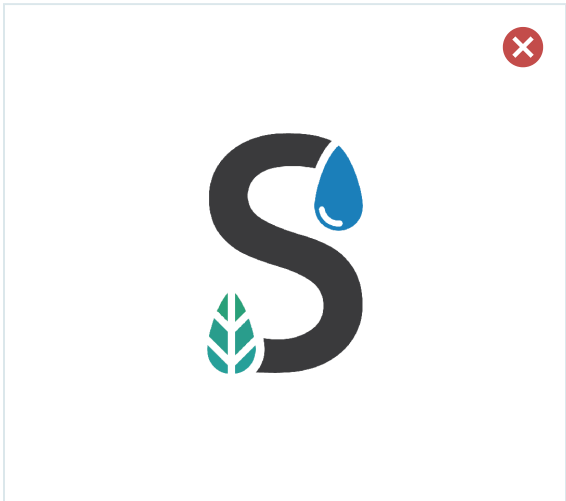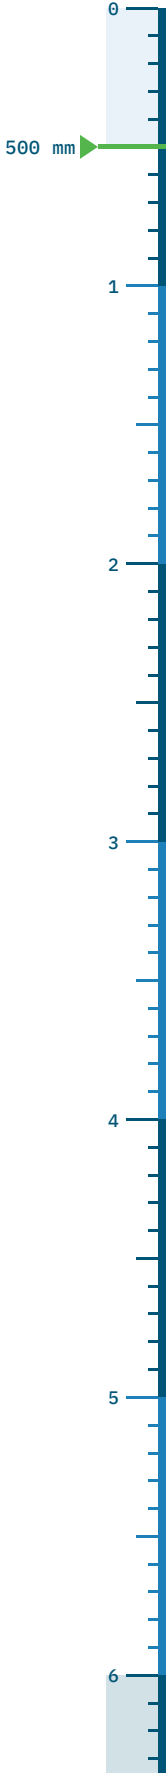


Retire the earlier S-and-leaf mark. It still sits in the website asset library.




Retire the earlier thin wordmark, also still in the asset library.

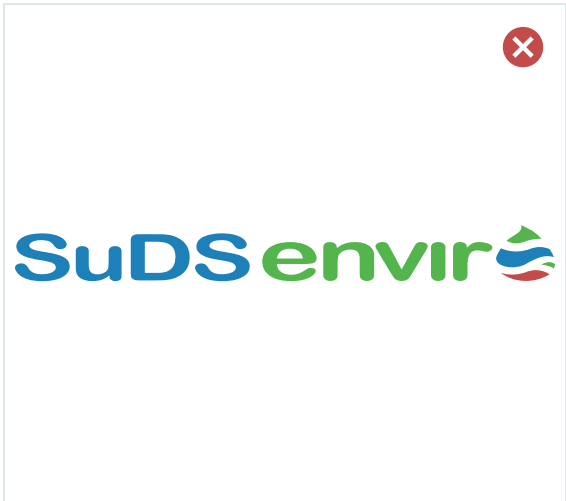

Do not stretch or squash it.

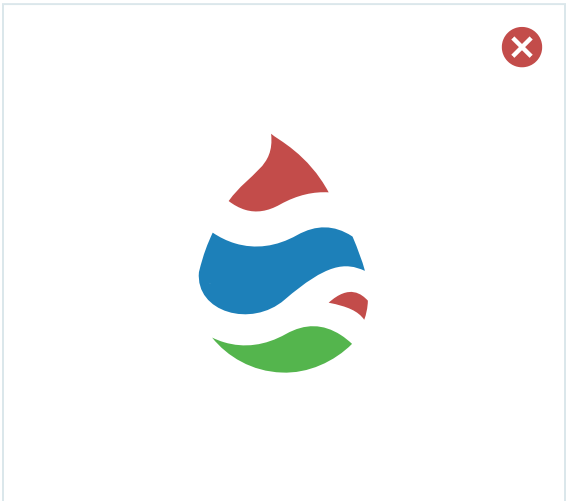

Do not reorder or recolour the bands.

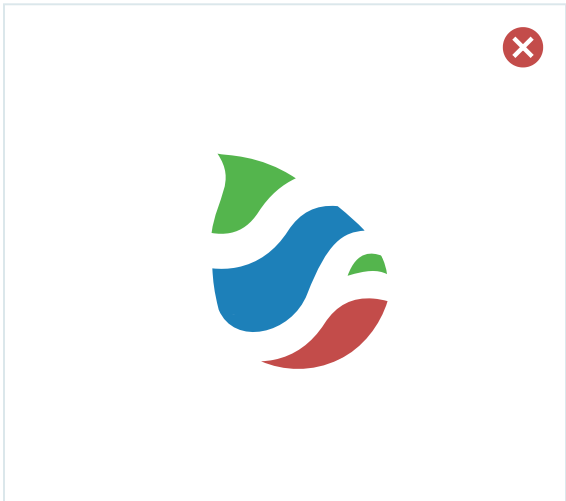


Do not rotate the drop.



Do not set it straight onto a busy photo.



Do not retype the name in Montserrat as a logo.

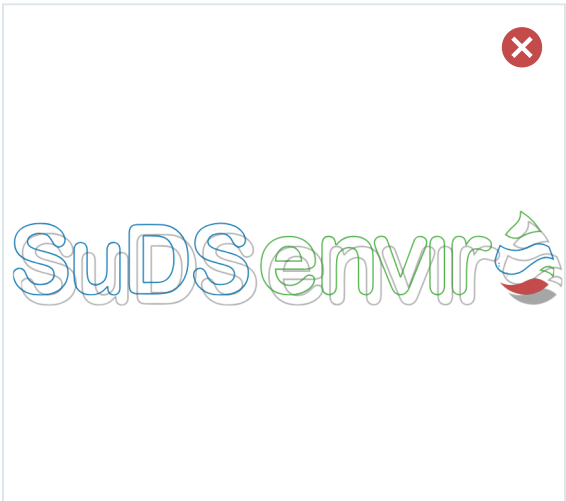

Do not outline it or add effects.



1000 mm


COLOUR

Keep the four colours SuDS Enviro already uses. Add only what was missing: a reading ground, a dark ground, and a green that can carry text.


1000 mm. The shallowest RHINO inspection chamber we make.




BLUE
The bold voice. Headings, buttons, water.
Live site variable

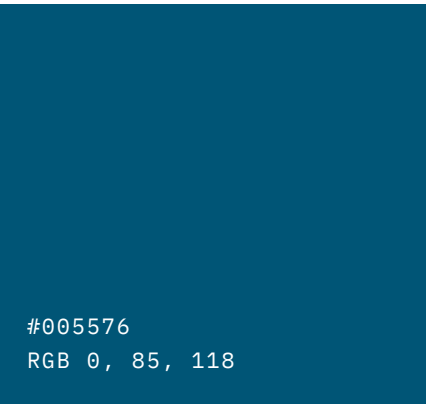


DEEP
Body copy, navigation, the reversed ground.
Live site variable

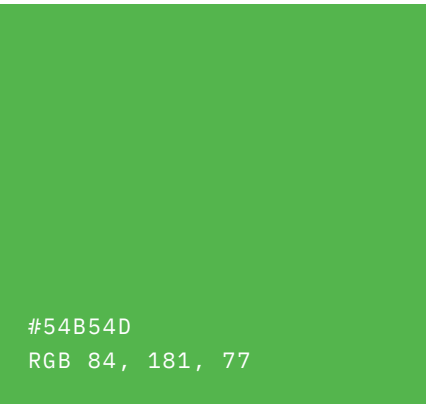


GREEN
The light voice, the land, the outlet node.
Live site variable

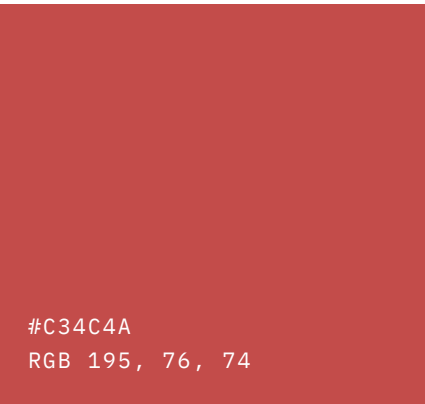

RED
Foul water. Used sparingly, always low down.
In the drop

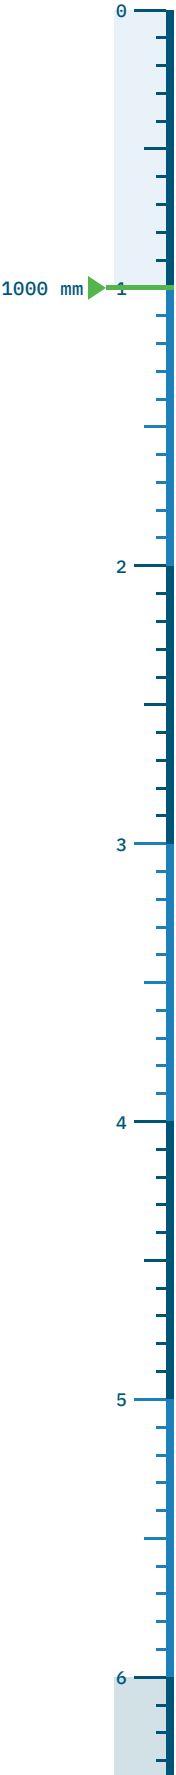

EVERY COLOUR IS A LAYER OF THE GROUND

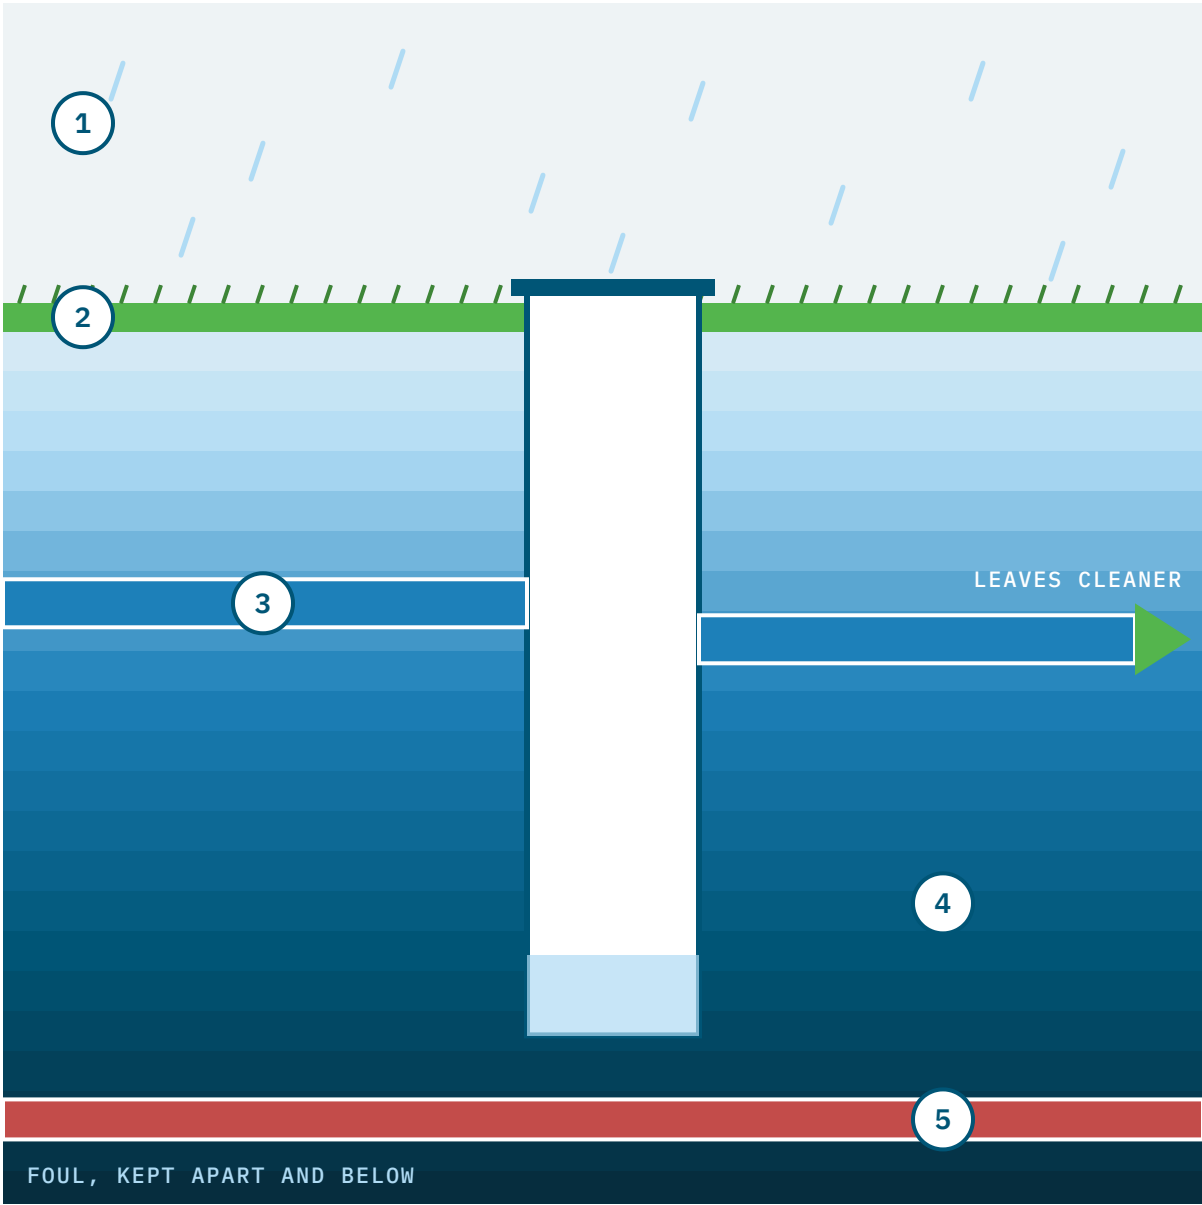


- 1** **SKY RAIN**
The sky and the rain before it lands.
Lines, rules and text on dark grounds.
- 2** **GREEN** THE GROUND, AND CLEANER WATER
The land the rain falls on: roofs, roads, gardens, the site. The small green in the drop is water leaving cleaner than it arrived.
The light voice, the outlet node, the turf line.
- 3** **BLUE** SURFACE WATER
Rain and runoff: the water SuDS Enviro catches, settles, separates and controls.
The bold voice, buttons, clean-water products.
- 4** **DEEP** BELOW GROUND
Depth, structure and the engineering. Water darkens the further down it goes.
Body copy, navigation, the reversed ground.
- 5** **RED** FOUL WATER
Sewage, grease and off-mains treatment, kept at the bottom and apart from everything above it.
The one accent on foul material. Used sparingly, always low down.

The order never changes. Green over blue over red, as in the ground and in the drop: clean water above, foul water below.

Surface, Invert and Field are grounds and a text green, chosen to carry these five. They have no meaning of their own.

1000 MM / WHAT WE ADDED

FOUR ADDITIONS, EACH WITH A JOB



SURFACE

#EEF3F5 RGB 238, 243, 245
Reading ground and catalogue ground.




INVERT

#062A3A RGB 6, 42, 58
Dark ground for foul water and night.



FIELD


#3D8537 RGB 61, 133, 55
Green that can carry text on Paper.



SKY


#AFDBF4 RGB 175, 219, 244
Already on the site. Lines and text on dark.

HOW MUCH OF EACH, ACROSS A TYPICAL DOCUMENT

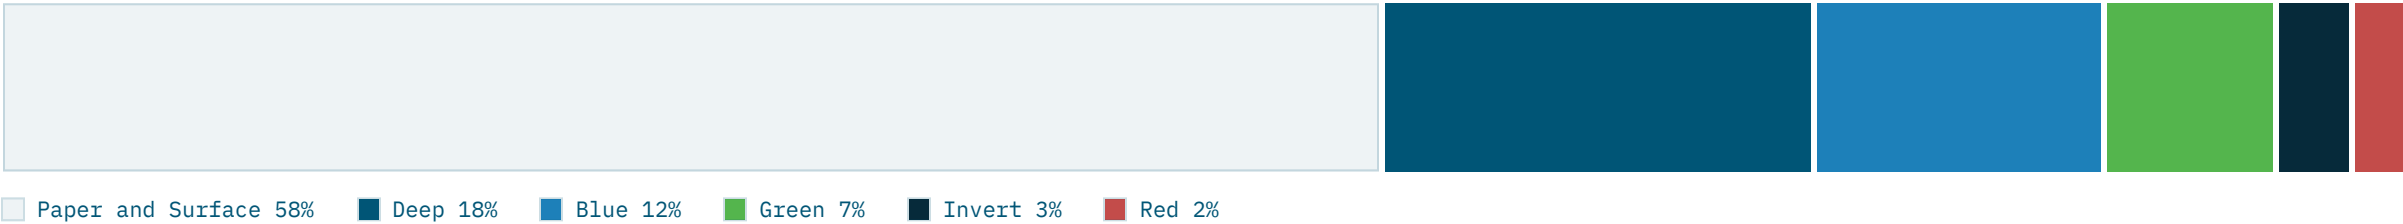

Autoflo yellow #FFE313 stays where the live site uses it: the Rhino autoFlo sub-brand, and nowhere else. It is a product accent, not a brand colour.

These are screen values in hex and RGB. Print colours are not specified here: match them to these values on a press proof before any run, and keep the proof as the reference for that printer.

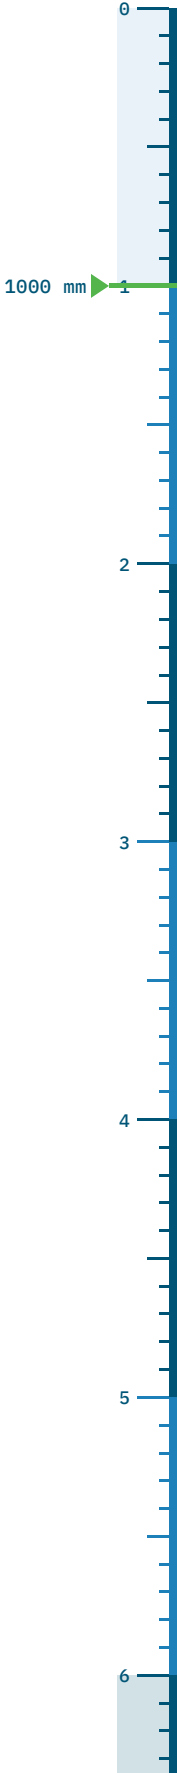


1000 MM / THE AXIS

CLEAN WATER

Surface water, rainwater and silt. Material for these products sits on Paper or Surface, in Blue and Green.

- RHINO SERSIC inspection chambers
- Catchpits and silt traps (SERS, SERDS)
- SudSceptor hydrodynamic separators
- RhinoPod filters
- RhinoRoFlo and RhinoRoTex flow control
- Rainwater harvesting

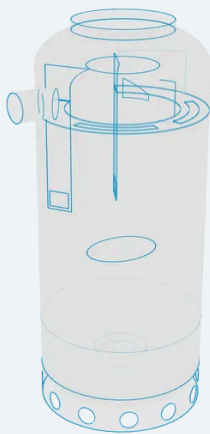


This is how the customer meets the products: the site splits every range into foul and surface water solutions, and so does the drop, with red kept at the bottom. The two grounds make the split visible from across a room.


FOUL WATER

Foul drainage, grease and off-mains treatment. Material for these sits on Invert, with Sky for lines and Red as the one accent.

- RHINO SERFIC inspection chambers
- RhinoLift pumping stations
- Grease traps (RHINO GT)
- Grease separators
- Septic tanks

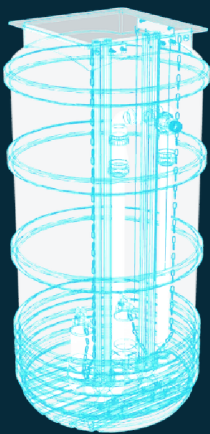

Products used on both sides, like the chambers and pumping stations, follow the job they are doing in that piece.

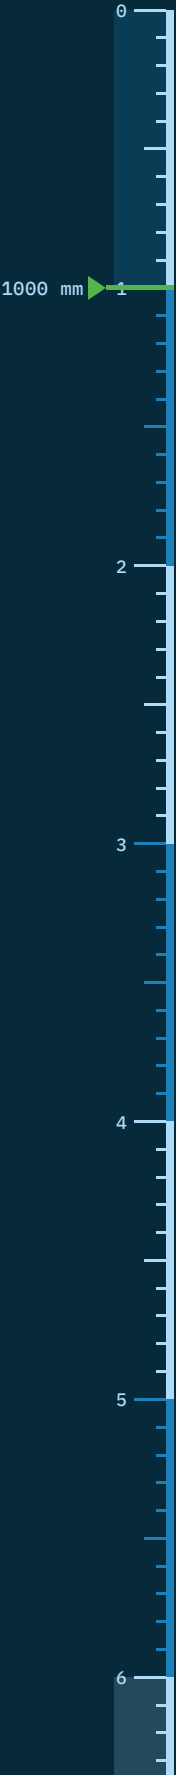

1000 MM / CONTRAST, MEASURED

EVERY PAIRING, WITH ITS RATIO


TEXT ON	PAPER	SURFACE	SKY	BLUE	DEEP	INVERT
Ink #0B2B3C	14.74 AA	13.17 AA	10.01 AA	3.40 LARGE	1.80 FAIL	 FAIL
Deep #005576	8.20 AA	7.33 AA	5.57 AA	1.89 FAIL		1.83 FAIL
Blue #1D80B9	4.34 LARGE	3.88 LARGE	2.95 FAIL		1.89 FAIL	3.46 LARGE
Field #3D8537	4.56 AA	4.07 LARGE	3.09 LARGE	1.05 FAIL	1.80 FAIL	3.29 LARGE
Green #54B54D	2.59 FAIL	2.32 FAIL	1.76 FAIL	1.67 FAIL	3.16 LARGE	5.78 AA
Red #C34C4A	4.72 AA	4.22 LARGE	3.20 LARGE	1.09 FAIL	1.74 FAIL	3.18 LARGE
Sky #AFDBF4	1.47 FAIL	1.32 FAIL		2.95 FAIL	5.57 AA	10.19 AA
White #FFFFFF		1.12 FAIL	1.47 FAIL	4.34 LARGE	8.20 AA	15.00 AA

AA means 4.5 : 1 or better, fine for body text.
Large means 3 : 1 or better, fine for text at 24 px and up, or 19 px bold. **Fail** means not for text at any size.

The site's light green heading voice measures 2.59 : 1 on white. It fails for text at every size.

So the light voice moves to **Field** on light grounds, 4.56 : 1, the same hue made darker. Green keeps every non-text job: the land, the outlet node, the light voice on Deep and Invert.

Blue reads at 4.34 : 1 on white: headings and buttons yes, body copy no. Body copy is Deep.

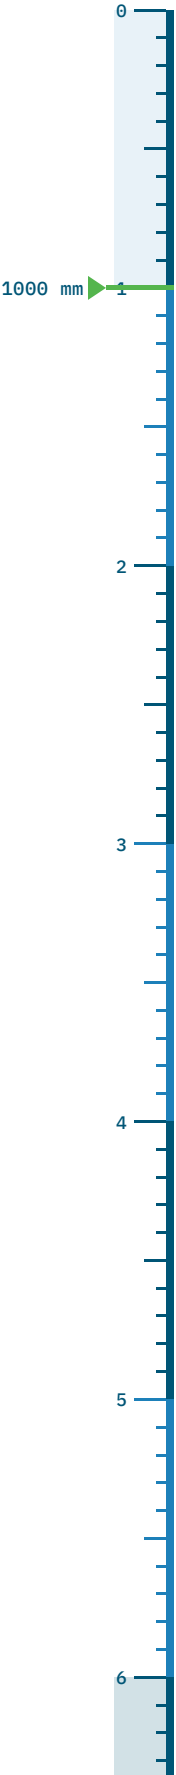



1500 mm

TYPE

Montserrat, the face the live site already uses, in two voices. IBM Plex Mono for anything that is a measurement.

Aa
Aa
Ø225

DISPLAY

MONTSERRAT 800
MONTSERRAT 300

Headings, uppercase, two weights in one line.

TEXT

Montserrat 400 and 600 for reading. Sentence case, never centred in long runs.


Body, captions, forms.

MEASUREMENT

IBM Plex Mono 400 / 500
SERSIC600 · 3000 mm · 9
o'clock

Codes, sizes, depths, eyebrows.

Both families are open licence (SIL OFL) from Google Fonts, so any printer, sign maker or web developer can use them without a licence.

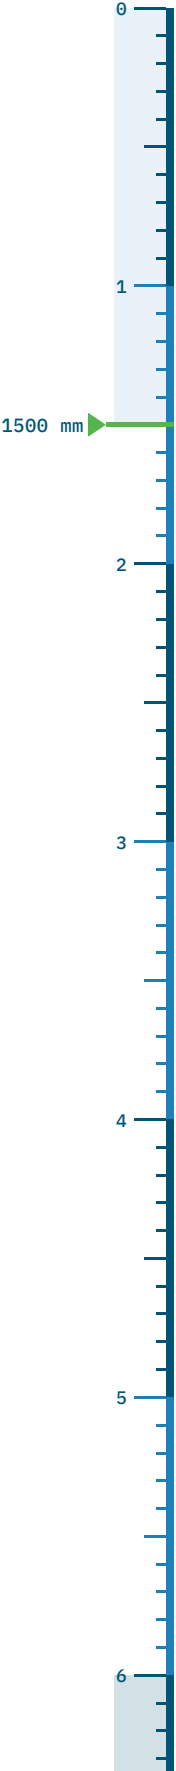

1500 MM / TWO VOICES

LIGHT SAYS WHAT IT IS. **BOLD SAYS WHICH ONE.**

THE **RHINO RANGE**

The live site's own pattern: the generic word light, the name bold.

INSPECTION **CHAMBERS**

Light for the family, bold for the thing.


Rhino ***RoFlo***

Sub-brands: Rhino upright, the product name in bold italic, as on the site.

THE RULES

1. Headings are uppercase, Montserrat 300 then 800 in the same line. Never more than two weights in one heading.
2. The light voice comes first and is the general word. The bold voice is the specific one.
3. On Paper and Surface the light voice is Field and the bold voice is Blue. On Deep and Invert they are Green and White.
4. Body copy is sentence case, Montserrat 400, Deep. Highlight a phrase in Field 600 at most once a paragraph.
5. Every measurement is set in Plex Mono with a space before the unit: 600 mm, Ø225 mm, 5 l/s.
6. Long passages are left aligned. The site's right-aligned blocks stay as feature moments only.

SERSIC600 Ø600 mm
Inlets 3 / 5 / 6 / 7 / 9 o'clock
Outlet 12 o'clock Ø225 mm Twinwall
Depth 1500 mm to soffit Sump 350 mm

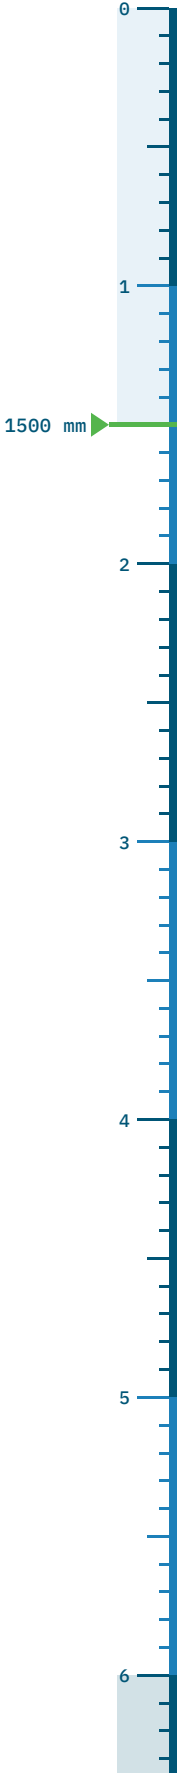

1500 MM / SCALE

NINE SIZES, SCREEN AND PRINT

ROLE	SCREEN PX	WEIGHT	PRINT	SAMPLE
Display	72 / 72	800 + 300 caps	60 pt	THE TWO VOICES ONE SOLUTION FLOW CONTROL Choose your inlets One-piece HDPE chambers, six diameters. Outlet fixed at 12 o'clock on every chamber.
Heading 1	48 / 50	800 + 300 caps	36 pt	
Heading 2	32 / 36	800 caps	22 pt	
Heading 3	22 / 28	700	14 pt	
Lede	20 / 29	500	12 pt	
Body	17 / 26	400	9.5 / 14 pt	3000 MM / PHOTOGRAPHY SEHDS1800 Ø1800 mm Re-shot from the 3D file.
Eyebrow	12 / 16 +0.16em	Mono 500 caps	7 pt	
Data	14 / 20	Mono 400	8 pt	
Caption	12 / 17	Mono 400	7 pt	


Screen sizes are for desktop; on phones, Display and Heading 1 drop to 44 and 34 px. Line lengths stay near 65 characters.

IN USE

INSPECTION CHAMBERS

One-piece HDPE, benched and channelled. Six diameters from 450 to 1200 mm.

SERSIC600 Ø600 mm
Inlets 3 / 5 / 6 / 7 / 9
Outlet 12 o'clock
Depth to 6000 mm

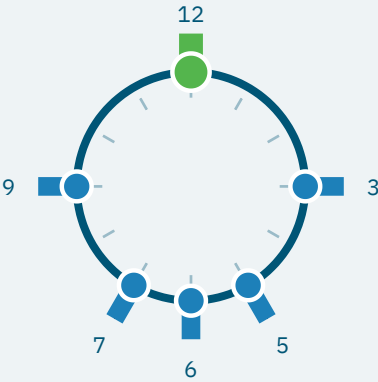

SUDS ENVIRO, EVERY TIME

WRITE	NOT
SuDS Enviro in running text	Suds Enviro, SUDS Enviro, SuDS-Enviro, Suds
SuDS Enviro Ltd on legal lines and invoices	SuDS Enviro Limited (unless the registered name says so)
SuDS for sustainable drainage systems	SUDS, Suds, suds
the RHINO range for the family	the Rhino Range, the rhino range
SERSIC600 : sales codes in capitals, no spaces, set in Plex Mono	Sersic 600, SERSIC-600

In all-capital settings, such as the seal and the eyebrows, SUDS ENVIRO is acceptable. Everywhere else the small u stays.


THE RANGE AS IT IS WRITTEN TODAY, WITH SALES CODES


PRODUCT	CODES	SIZES	PRODUCT	CODES	SIZES
RHINO inspection chamber	SERSIC, SERFIC	450 to 1200 mm	RhinoLift	PS50, Mini, Maxi, Aqua	600 to 1200 mm
Catchpit / silt trap	SERS, SERDS	300 to 1200 mm	RHINO GT grease trap	Jumbo Micro	under sink, floor
RhinoRoFlo orifice	SERF300, 450, 600	300 to 600 mm	RhinoPod	SERP0D1850	floating cartridge
RhinoRoTex vortex	ROTEX600 to 1200	600 to 1200 mm	RhinoDuct drawpit	SERD	150 mm sections
SudSceptor separator	SEHDS750 to 3000	750 to 3000 mm	RhinoPit	SERPT600	600 mm

FOR SUDS ENVIRO TO DECIDE

Product names are written several ways across the site, the data sheets and the 3D files. We have not picked silently. These need one answer each:

- RHINO or Rhino.** "RHINO SERSIC" on chambers, "Rhino RoFlo" and "RhinoRoFlo" on flow control, "RhinoLift" on pumps. We suggest RHINO for the range and Rhino + name, one word, for named products (RhinoLift, RhinoPod, RhinoRoFlo).
- SudSceptor.** The separator's name breaks the SuDS capitals. Keep it as a product name, or make it SuDSceptor?
- Sales and drawing codes.** The 3D library carries both (SERCIC and SERSIC appear for chambers). One list should map them.
- The three greens.** The logo masters hold #5BB44F, the site holds #54B54D, the RHINO lockup #54B54D. This book uses the site value; the masters should be re-saved to match.

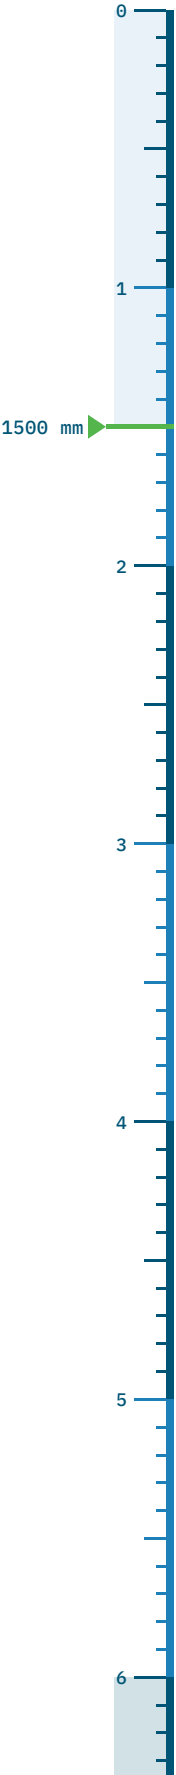



2000 mm

VOICE

SuDS Enviro should sound like the best person on its sales line: someone who knows the product range by heart and gives you the number before you ask.

2000 mm. The deepest adoptable catchpit.

01

SAY THE SIZE.

Ø225 mm outlet at 12 o'clock, not a large outlet. Numbers are what engineers trust.

02

ANSWER FIRST.

The reply to a question goes in the first sentence. The reasons follow.

03

SITE ENGLISH.


Write the way a good contracts manager talks on the phone: plain, specific, calm.

04

ONE JOB PER SENTENCE.

If a sentence needs a second comma, it is usually two sentences.

British English. No exclamation marks. No em dashes. Numbers as figures, with units.

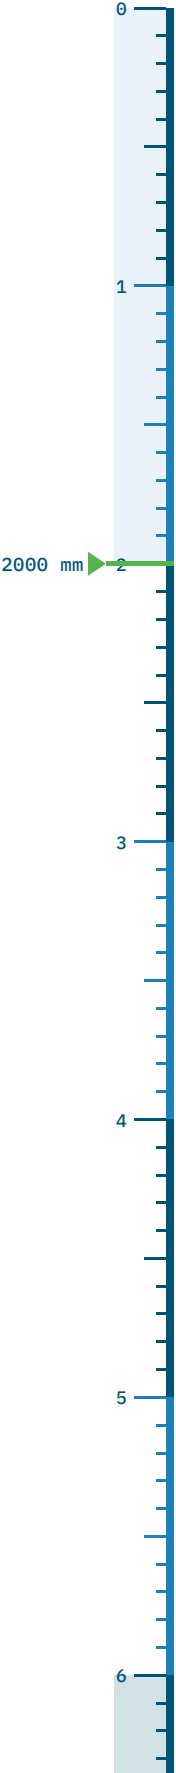

2000 MM / LINE BANK

LINES THAT CAN BE USED AS THEY ARE

EVERY DROP,
ACCOUNTED FOR.

The working line for the identity.

BESPOKE,
STANDARDISED.

SuDS Enviro's own slogan. Unchanged.

FIVE WAYS IN.
ONE WAY OUT.

The Clockwork chambers: inlets at 3, 5, 6, 7 and 9, outlet at 12.

FROM ROOF
TO RIVER.

Already on the site's Water Journey page.

DOWN TO
SIX METRES.

Non-adoptable chambers go to 6000 mm.

NO MOVING
 PARTS.
NO POWER.


True of RhinoRoFlo and RhinoRoTex flow control.

THE HOME OF
SUDS RHINO.

From the drawing title block.

BUILT FOR
 THE BIT
NOBODY SEES.

For recruitment and the about page.

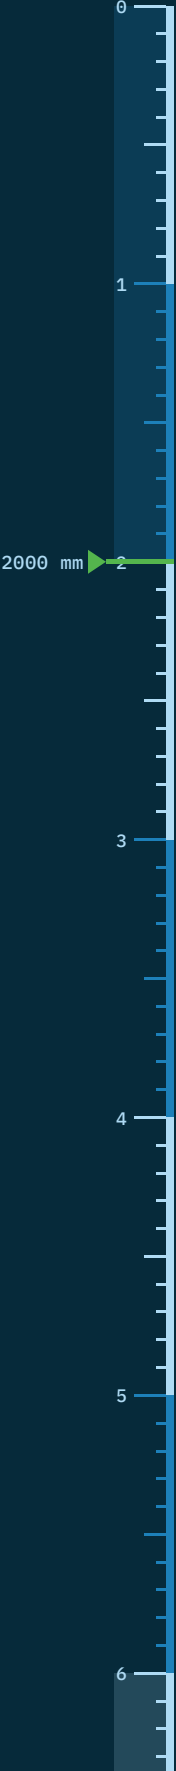

2000 MM / WE SAY, WE DON'T SAY

ON THE PHONE, IN THE INBOX, ON THE SITE


WHEN	WE SAY	WE DON'T SAY
Lead time	We will confirm a delivery date once we have checked your drawing.	Super fast turnaround on all orders!
A spec question	A 600 mm chamber takes up to four inlets, at 3, 5, 6, 7 or 9 o'clock. The outlet is at 12.	Our revolutionary multi-inlet solution offers unmatched flexibility.
Something we don't make	We don't make that combination. The nearest is a 750 mm chamber with the same inlets.	Unfortunately we are unable to accommodate your request at this time.
Adoption	Adoptable chambers go to 3000 mm to soffit under DCG. Deeper than that, we can talk you through a non-adoptable option.	Fully compliant with all regulations.
A problem on site	Send us a photo and the chamber code from the label. We will call you back.	We apologise for any inconvenience caused.
Web copy	Catchpits that hold the silt until you lift it out.	Cutting-edge silt management solutions for a sustainable future.
Performance	Removes over 50% of fine suspended solids, 0 to 200 microns, at design flow.	Industry-leading performance you can trust.

BEFORE, FROM THE LIVE SITE

Improper surface water management can lead to flooding, erosion, and pollution. Effective management involves drainage basins, conveyance systems, and retention basins. At SuDS Enviro, we use advanced techniques to control runoff, reduce erosion, and improve water quality.

AFTER



Rain that can't soak away has to go somewhere. Our chambers, catchpits and flow controls catch it, take the silt and oil out, and let it go at the rate your sewer or river can take. Tell us the site and we will tell you which ones.

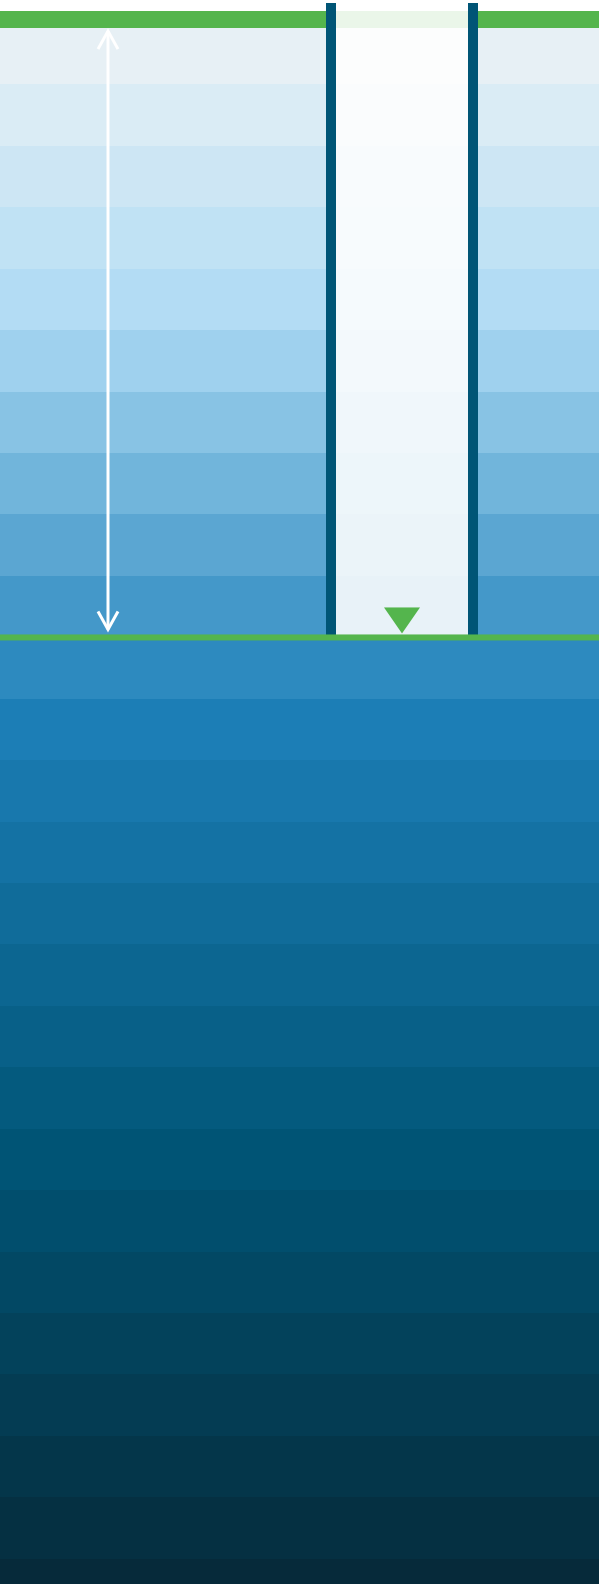

2500 mm


GRAPHIC
DEVICES

Six devices, all harvested from work SuDS Enviro already has: the drop, the configurator, the website and the drawings. Use one or two at a time. They are seasoning.

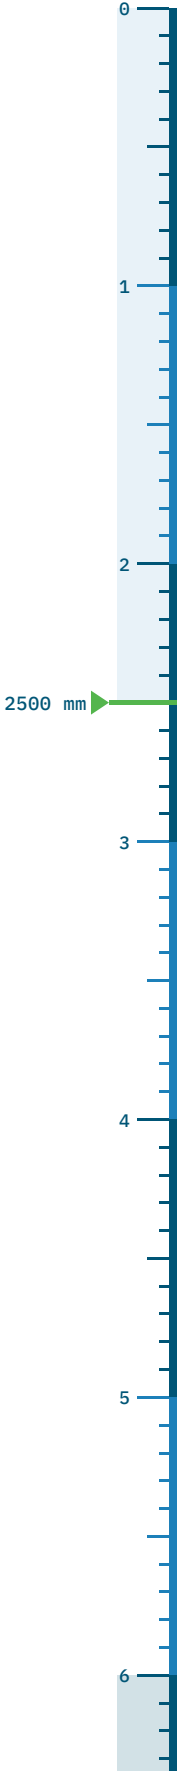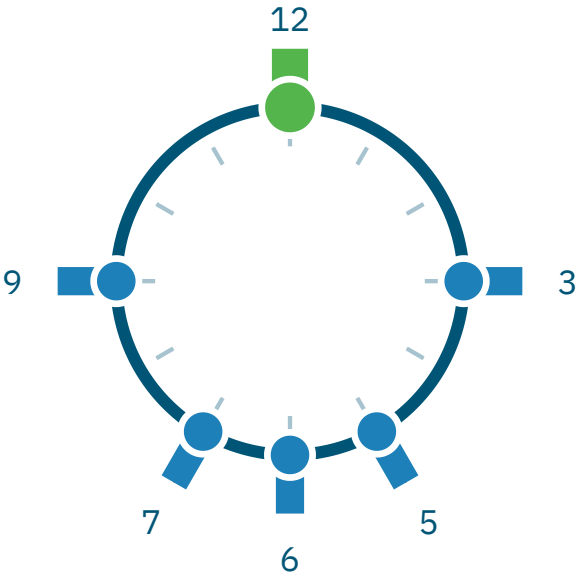

DEVICE	HARVESTED FROM	USE IT FOR
The cut	The site's Site Explorer, where the ground cuts away	Covers, chapter openers, footers
The gauge	River staff gauges; the 500 mm depth steps in the configurator	Progress: page edges, scroll, configurator steps
The Clockwork plan	The configurator's clock face and the Clockwork inlet system	Anything about inlets and outlets
The bands	The drop's four layers and the site's wave borders	One divider per spread, the edge of a page
The x-ray	The ghosted product drawings on the live site	Showing what is inside a product
The ring	The diameter picker on the site	Sizes, in pairs with the plan

ONE OR TWO AT A TIME

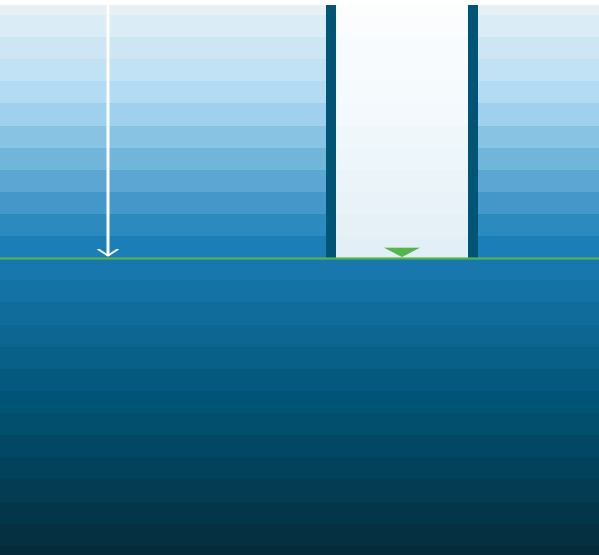


01 THE CUT

Ground on top, strata tinted by depth, a shaft cut to the level that matters. Always measured.



04 THE BANDS

The drop laid flat: green, blue, green, red, in that order, never re-ordered.

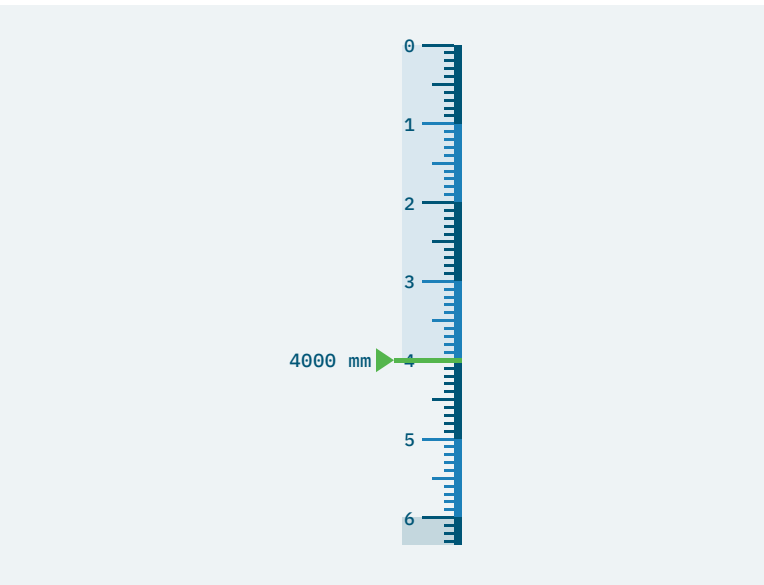


02 THE GAUGE

Alternates colour every metre like a river staff gauge. The green marker is where you are.




05 THE X-RAY

A ghosted product drawn in Blue lines, Green on the parts that move water.

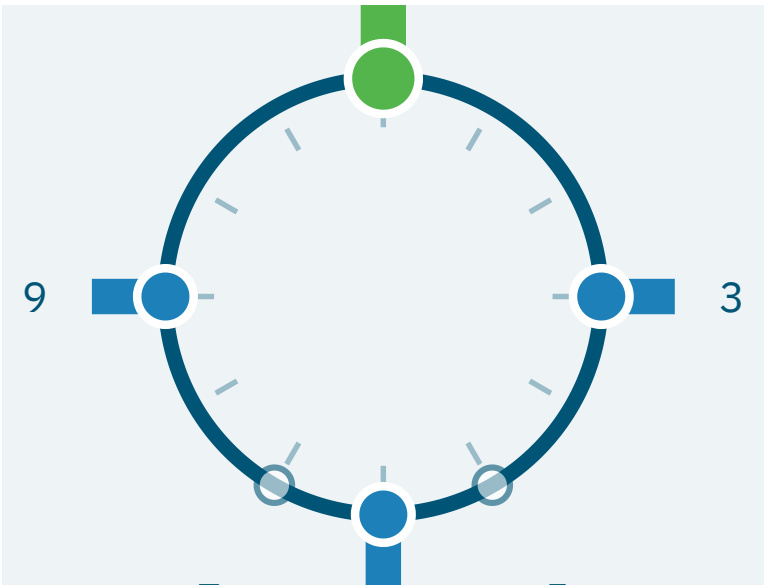


03 THE CLOCKWORK PLAN

Outlet green at 12, inlets blue at the positions used. Unused positions stay as faint rings.

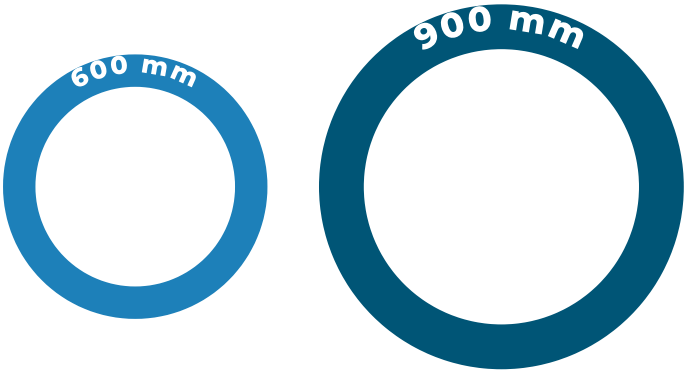

06 THE RING

A diameter with its size set along the arc, white on the band. Darker blue for larger sizes.

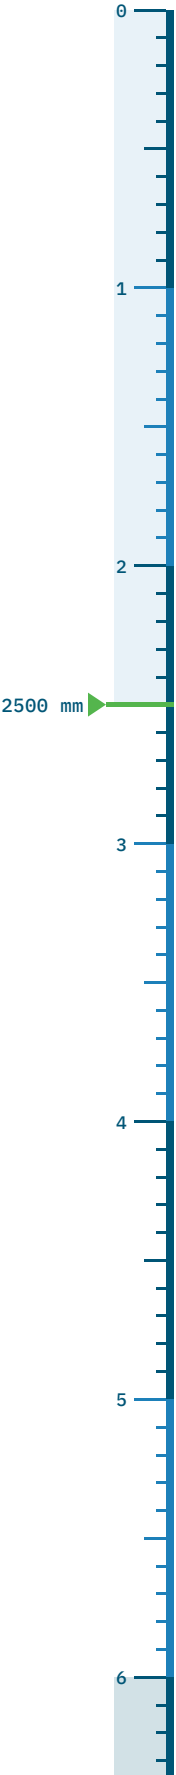

2500 MM / THE CLOCKWORK SYSTEM

FIVE WAYS IN. ONE WAY OUT.

Inlets are manufactured at 3, 5, 6, 7 and 9 o'clock, the outlet is fixed at 12. That gives exactly 31 inlet layouts, drawn here. Bespoke for the site, standardised in the factory: the slogan, as a diagram.


1 INLET

5 layouts · 450 mm and up



2 INLETS

10 layouts · 450 mm and up

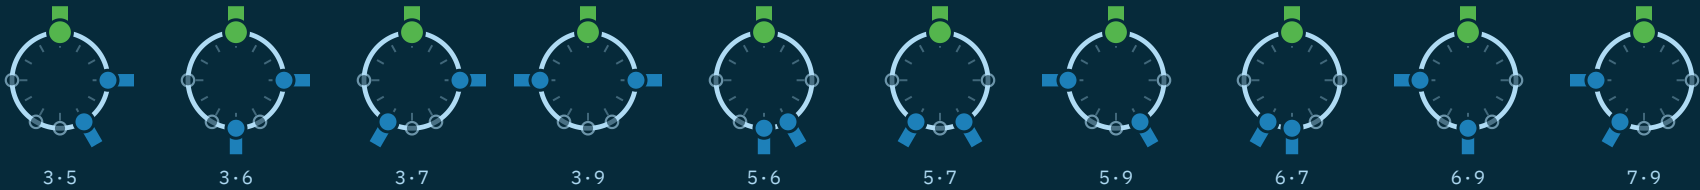

3 INLETS

10 layouts · 600 mm and up



4 INLETS

5 layouts · 600 mm and up




5 INLETS

1 layout · 750 mm and up



How many inlets a chamber takes depends on its diameter (450 mm: two, 600 mm: four, 750 mm and up: five), from the SERSIC and SERFIC data sheets and the configurator's rule R1.

2500 mm

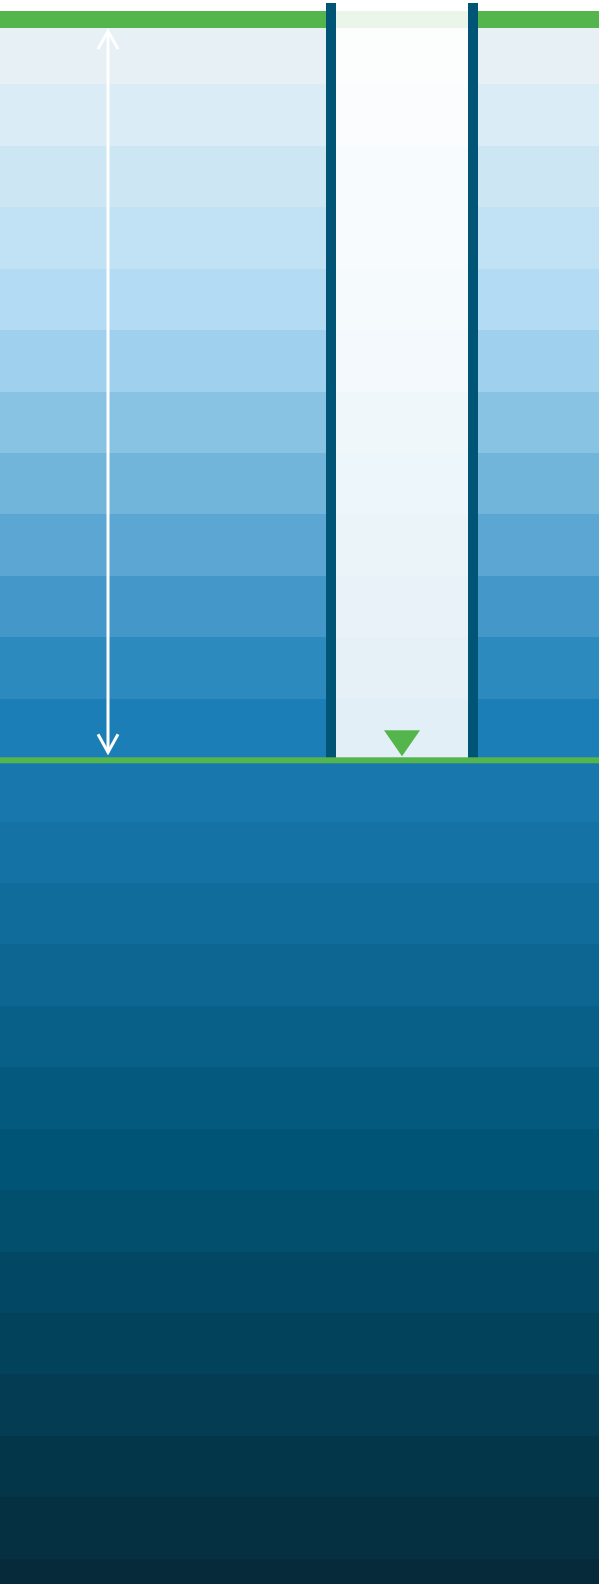

3000 mm

PHOTOGRAPHY

Two jobs, kept strictly apart. Catalogue images show the product and nothing else, all in one format. Hero images show it in the ground, the yard, the rain.

3000 mm. The deepest adoptable inspection chamber, to pipe soffit, under DCG and SfA7.

CATALOGUE

Data sheets, the configurator, the product pages, quotes. One fixed format, so forty products read as one set.

HERO

Covers, the home page, social, hoardings. Shot the way a site photographer would, never in the catalogue format.



3000 mm



3000 MM / CATALOGUE FORMAT

ONE CAMERA,
EVERY
PRODUCT

Frame	Square, product centred, filling 78%
Camera	22° above level, 35° round from front left
Ground	Surface #EEF3F5, seamless
Light	Key top left, soft fill, soft contact shadow
Lens	Long: 22° field of view, no distortion
Product	As made. Lid on, no props, no pipes

This set was rendered from SuDS Enviro's own 3D product files, so it is complete today and every new product can join it the day its file exists. A studio reshoot should copy the same numbers.

Body colour follows the 3D library's defaults until real material samples are matched.



RHINO SERSIC 600



RHINO SERSIC 600, five inlet



RHINO chamber base SEB1050



RhinoPit SERPT600



SudSceptor SEHDS1800



RhinoPod SERPOD1850



RhinoRoFlo POC600



RhinoRoTex C1200



RhinoLift PS50



RhinoLift Mini 2000D




RhinoLift Maxi 1600D




RhinoLift Aqua 190S



RHINO GT Jumbo Micro



RhinoDuct SERD



Rhino FloLock

3000 mm



3000 mm / HERO

SHOT WHERE **IT LIVES**

Three-quarter or low angles, real light: an overcast morning, low sun, work lights.
The product exactly as it is made.

3000 MM / HERO SET



Lowering a RHINO SERSIC chamber, housing site, morning



SudSceptor SEHDS1800 arriving on site, low sun



RhinoLift PS50 bedded in, under work lights



Where the water starts: rain on a new street



Where it ends: a clean outfall to the beck

These were re-photographed from the 3D product files with an image model, with the brief to keep each product exactly as it is. They show the direction, not finished photography: check every one against the real product before use, and replace them with the shoot on the next page.

3000 mm



SHOT LIST, ONE DAY ON SITE, ONE IN THE YARD

SHOT	WHERE AND WHEN	FOR
01 A chamber lowered into a trench	Housing site, overcast morning, low from the trench edge	Hero, covers
02 Stock yard after rain	Chambers on pallets, puddles, low sun from the left	Hero, website
03 A separator delivered	Flatbed and crane hook, late afternoon	Hero, social
04 A pumping station at dusk	Excavation, pea gravel, work lights	Foul water material
05 Rain on a new street	Kerb-level, gully grate, silver light	Openers, the cut
06 The outfall	Headwall into a beck after rain	Endings, back covers
07 In the factory	Extrusion, thermoforming, a weld being made	About, recruitment
08 Details	An inlet stub with pipe fitted; a cover flush in paving	Data sheets, social
09 The team	Real staff in the yard, with their consent	About, LinkedIn
10 Studio catalogue	Every product, to the catalogue numbers	Everywhere


THE RULES

- Every image starts from SuDS Enviro's own product, site or people. No stock people.
- Retouch light and dust, never the product. No added inlets, no changed colours.
- Heroes never appear in the catalogue format, and catalogue images never get a background.
- Deliver at least 6000 px on the long side. The site's current photos are too small for hoardings and A1 print.

Replace first. The photographs on the live site today are general water scenes. None of them shows a SuDS Enviro product, site or person.




3000 mm

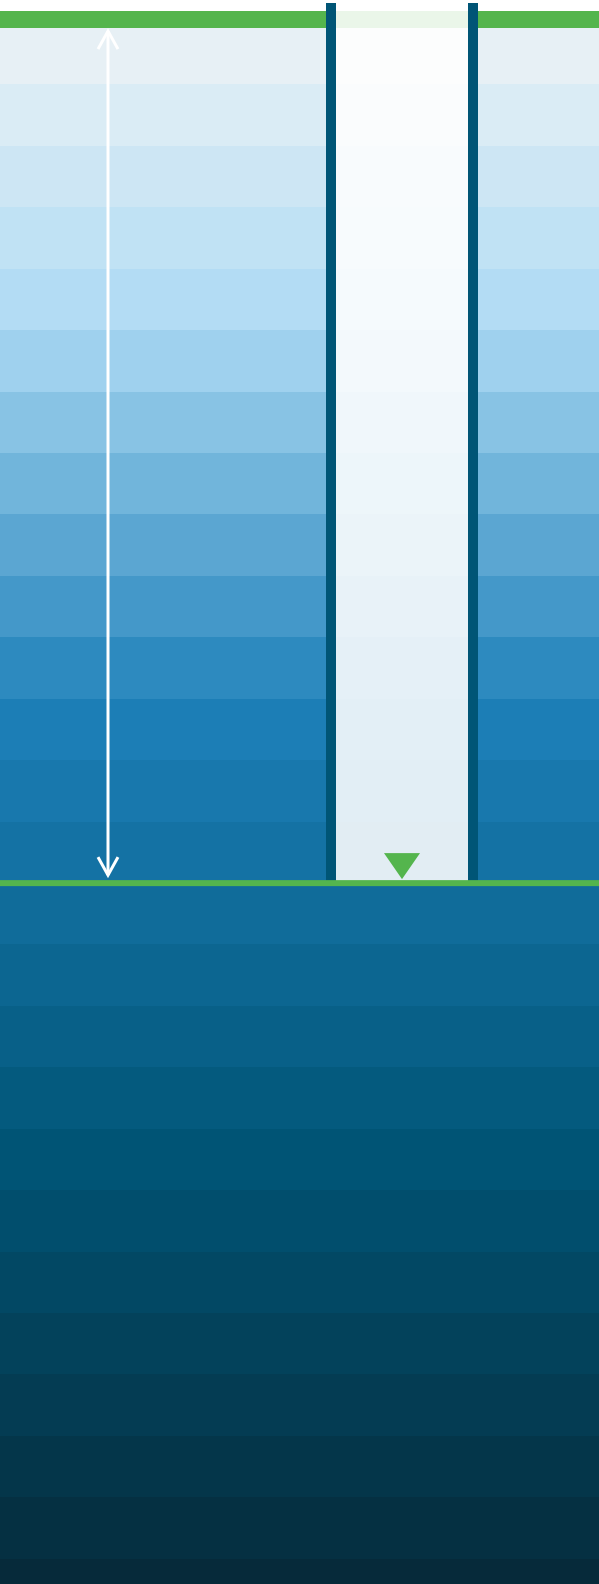

3500 mm

THE RHINO RANGE

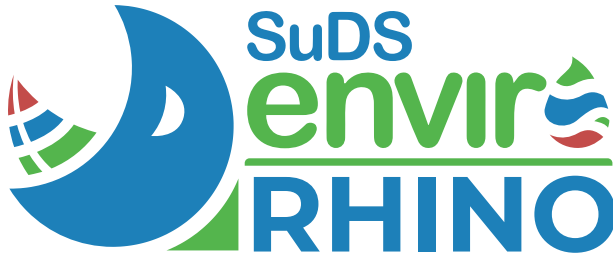

SuDS Enviro is the company. RHINO is the range. Each product is Rhino plus its own name, with the SuDS Enviro drop always somewhere on the page.

Rhino
RoFlo

Innovating hydrology. Orifice flow control.

Rhino
multiFlo

Versatile system entry. The Clockwork inlets.

Rhino
autoFlo


Sensible contingencies. The auto-siphon, in its own yellow.

The three sub-brand lockups and their straplines are from the live site. The rule: Rhino upright in white, the name in bold italic in Green, except autoFlo, which keeps its yellow.

3500 mm

3500 MM / THE RANGE, IN ORDER

FROM ROOF TO RIVER

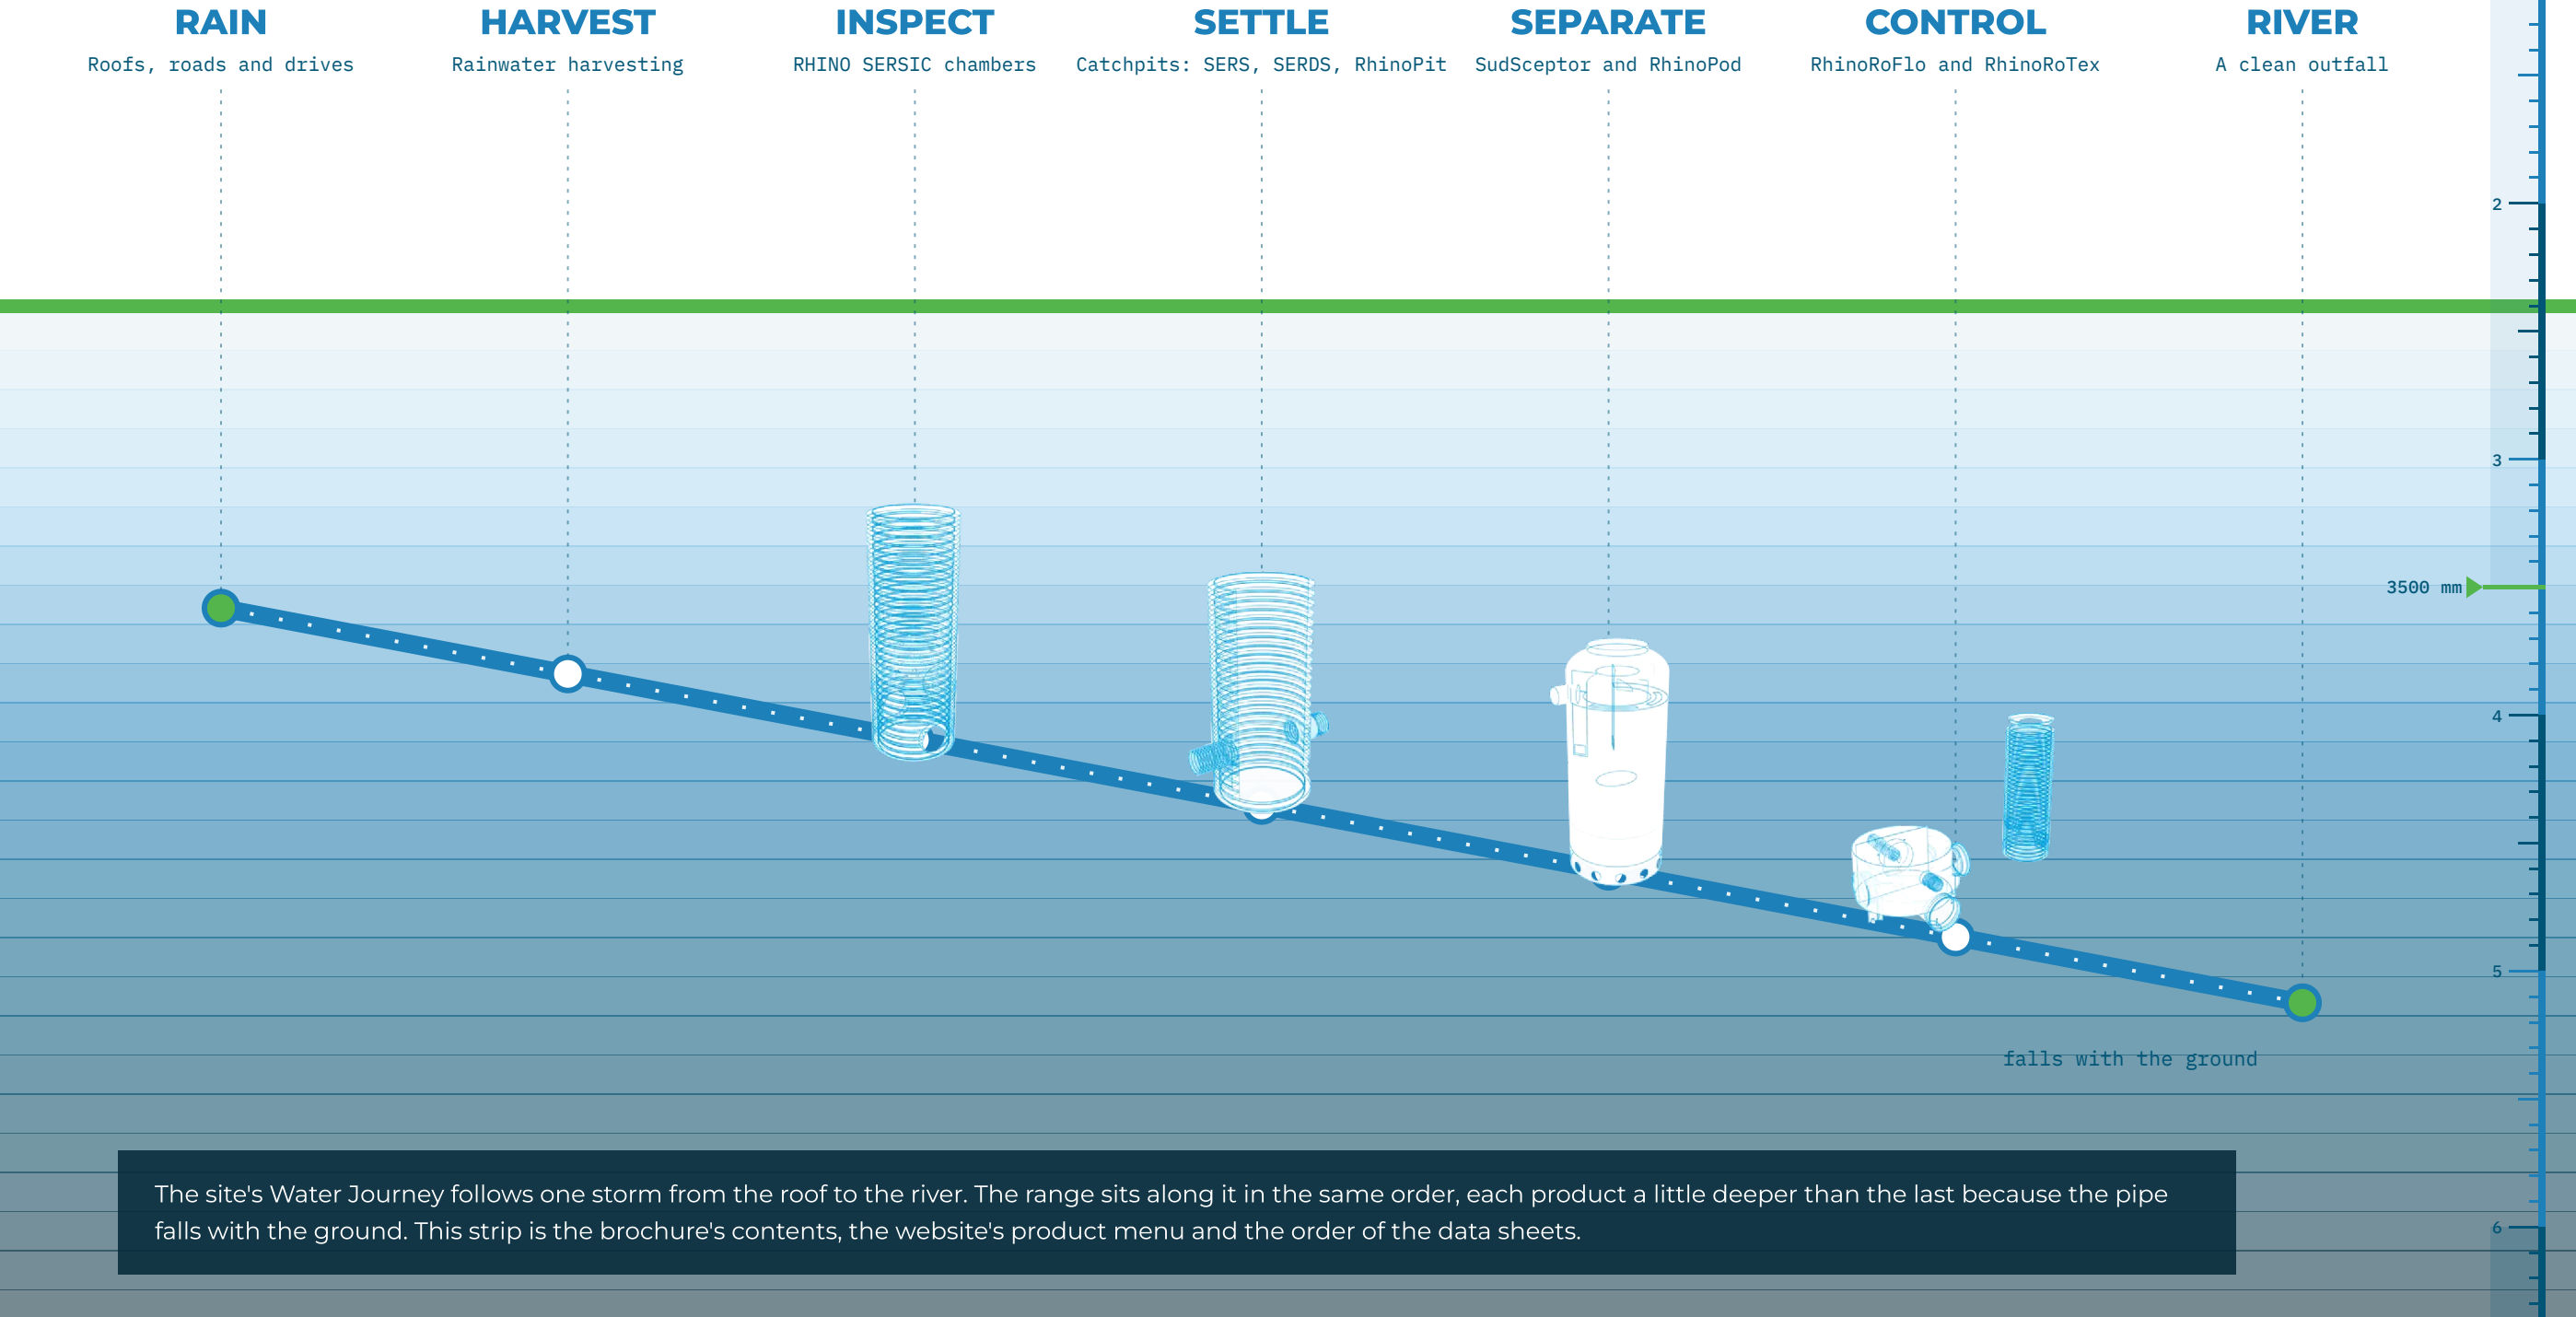


4000 mm

ON SCREEN


The rebuilt website already speaks most of this language. The book adds three things: the cut, the gauge and real photography.




4000 MM / THE WEBSITE, RUN LOCALLY FROM THE REPO

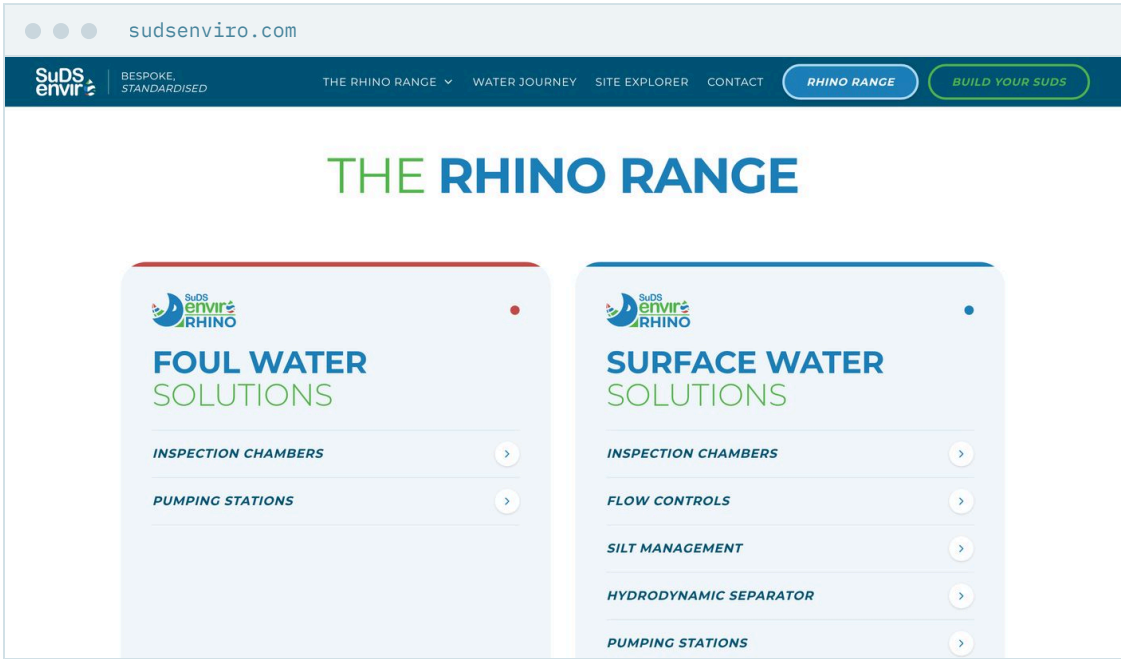

The RHINO range

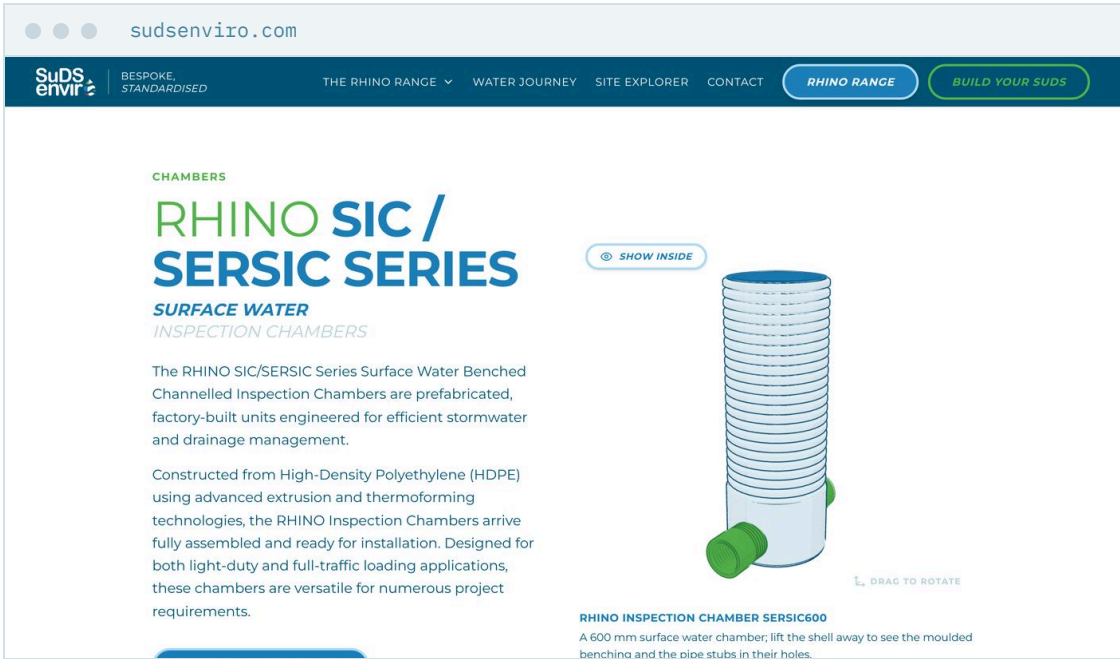

A product page

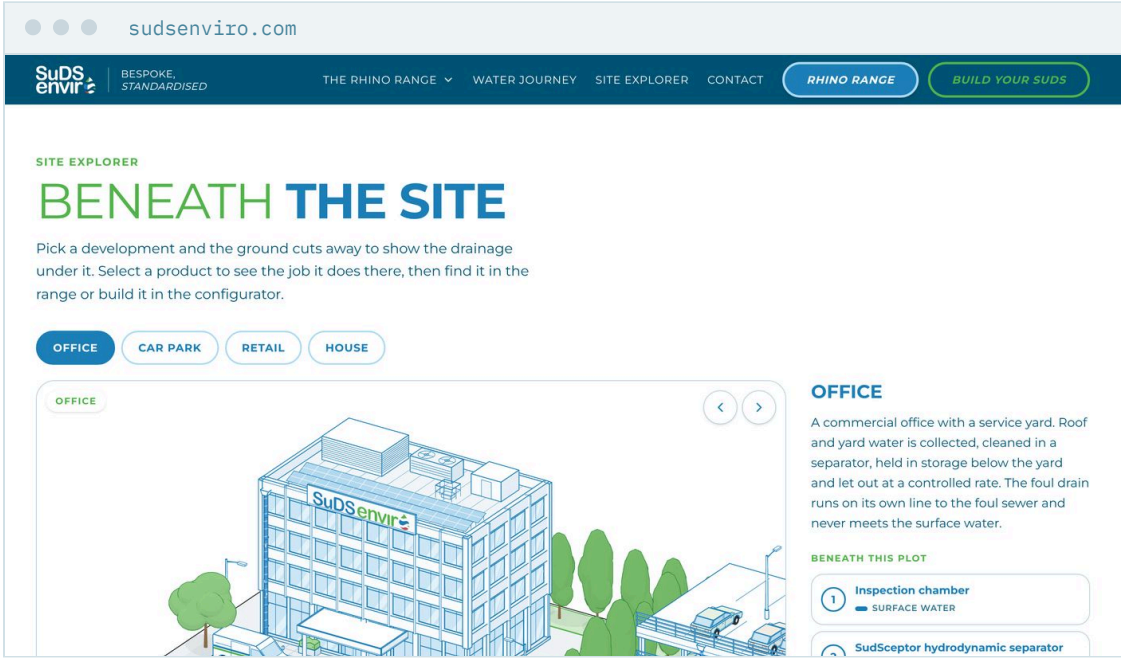

Site Explorer: the cut, already live



Water Journey: roof to river

01 / Field for the light voice. Swap the light green heading words to Field on white grounds. Same look, readable at every size.

02 / The gauge as scroll progress. A thin staff gauge down the right edge of long pages, green marker at your depth.


03 / Real photography. Replace the generic water stock with the shot list. Heroes on the home page, catalogue images on product pages.

4000 MM / ON THE PHONE, WHERE SITE TEAMS ARE


BUILT FOR A MUDDY THUMB

The configurator was built mobile first, for people on a site or in a van. The phone screens keep the bottom nav bar, big targets and the Clockwork clock face.


The configurator's own navy and greens already sit close to this palette. Moving it onto the same tokens as the website (Deep, Blue, Green, Field) makes them one product.

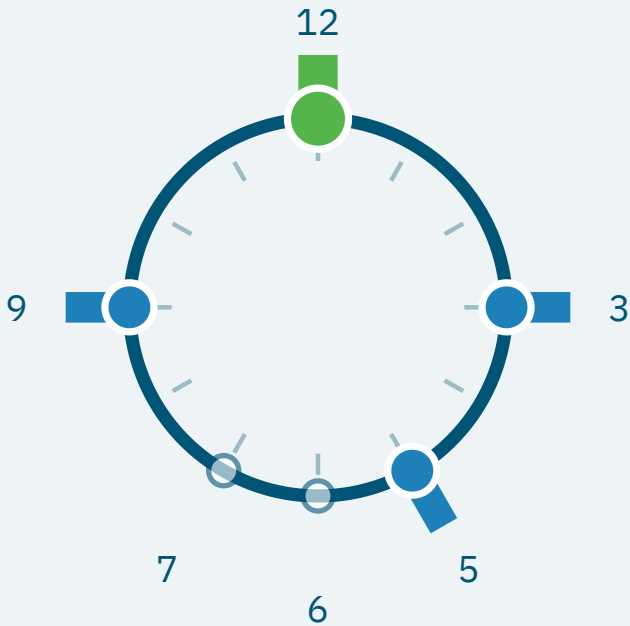

Home. The stacked lockup and the two-voice line, already live.

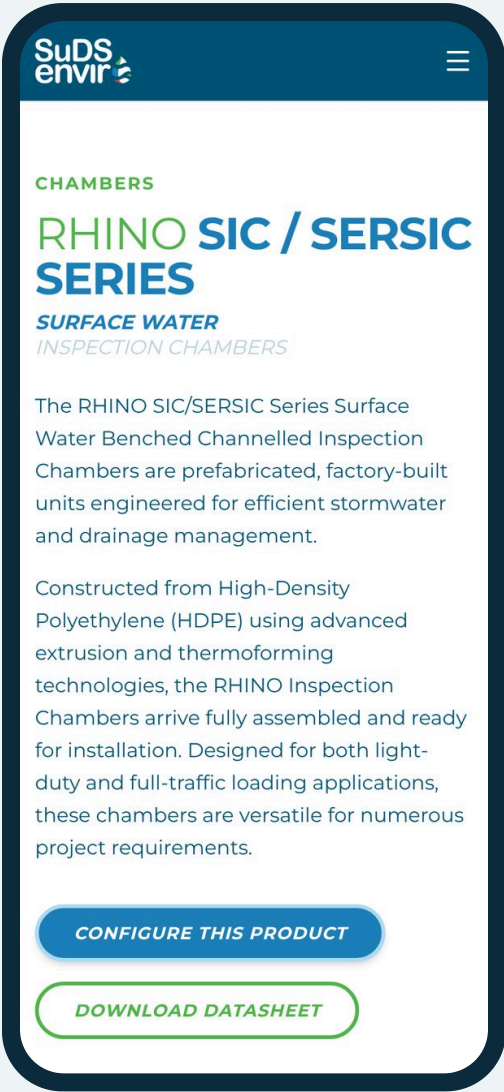

Product page. Catalogue image goes here, x-ray on tap.

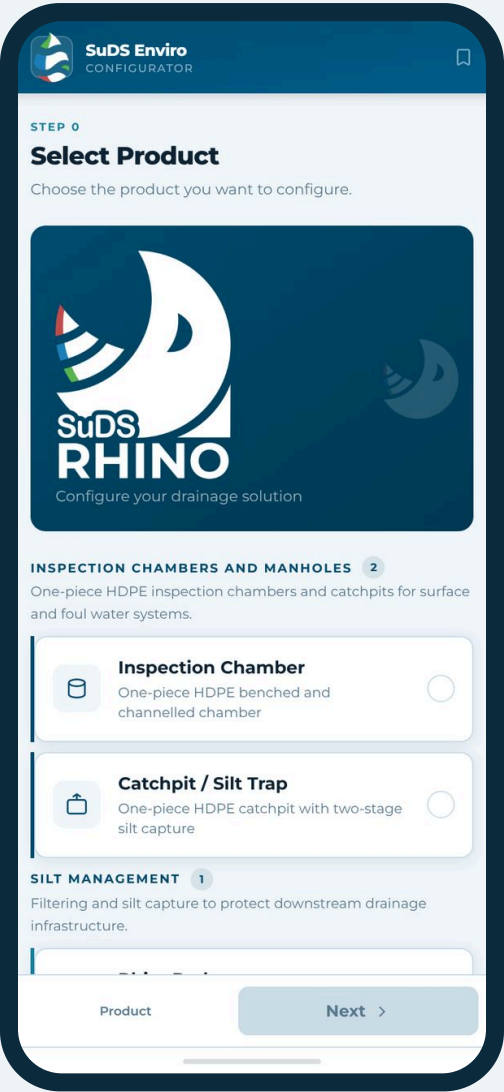

Configurator, step 0. Moves onto the website tokens.

4000 MM / SOCIAL, 9:16

ONE FACT PER FRAME

Every post carries one true number: a depth, a clock position, a percentage. The device does the talking, the logo signs off at the bottom.

Text stays inside the middle 70% so platform buttons never cover it. Frames are laid out for portrait, never cropped from landscape.

SuDSenvir

12

9

3

7

6

5

FIVE WAYS IN.
ONE WAY OUT.

RHINO SERSIC · 3 / 5 / 6 / 7 / 9 · 12

DOWN TO
SIX METRES.

SuDSenvir

6000 mm

SUDSCEPTOR SEHDS1800



>50%
of fine suspended solids, 0 to 200
microns, removed at design flow.

SuDSenvir

4000 mm

SuDSenvir

EVERY DROP, **ACCOUNTED FOR.**

LinkedIn cover, 1584 x 396. The left quarter stays clear for the profile avatar (the drop).

4500mm

IN PRINT

Print is where an engineer meets the brand at a desk: the data sheet, the quote, the card left on site.

The data sheet. Deep header with the reversed lockup, the two-voice title, the catalogue image beside the Clockwork plan, then the numbers in Plex Mono. Every figure on it comes from the SERSIC data sheet.

SuDSenviro


DATA SHEET · SERSIC

CHAMBERS / SURFACE WATER

RHINO SERSIC

One-piece HDPE benched and channelled inspection chambers, six diameters from 450 to 1200 mm.



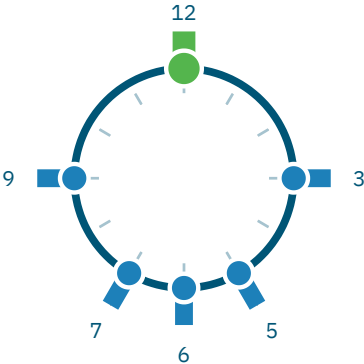

Material	HDPE, extruded and thermoformed
Diameters	450, 600, 750, 900, 1050, 1200 mm
Depth, adoptable	To 3000 mm to soffit (DCG / SfA7)
Depth, non-adoptable	To 6000 mm
Sump	350 mm integral
Pipe sizes	110 / 160 / 225 / 300 mm
Inlets	Up to 5, at 3, 5, 6, 7, 9 o'clock
Outlet	Fixed at 12 o'clock



BS EN 13598-2 · SfA7 · DCG · Building Regulations Part H1

SuDS Enviro Ltd · 9 Ambleside Court, Chester-le-Street
DH3 2EB

01224 057 700 ·
sales@sudsenviron.com

4500 MM / DESK PIECES

CARDS, QUOTES AND THE INBOX

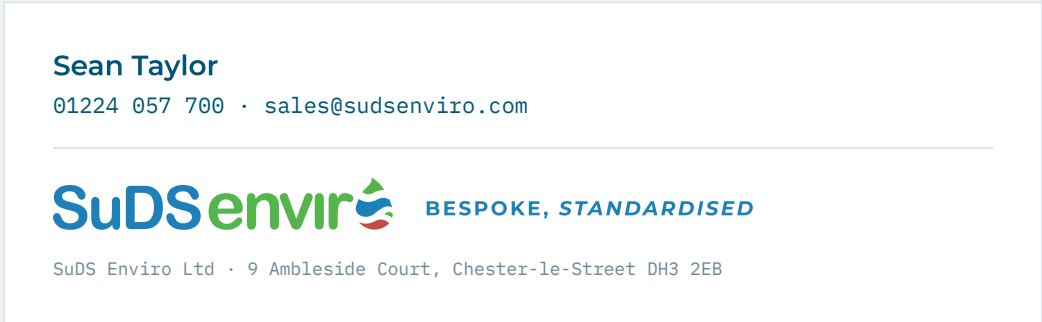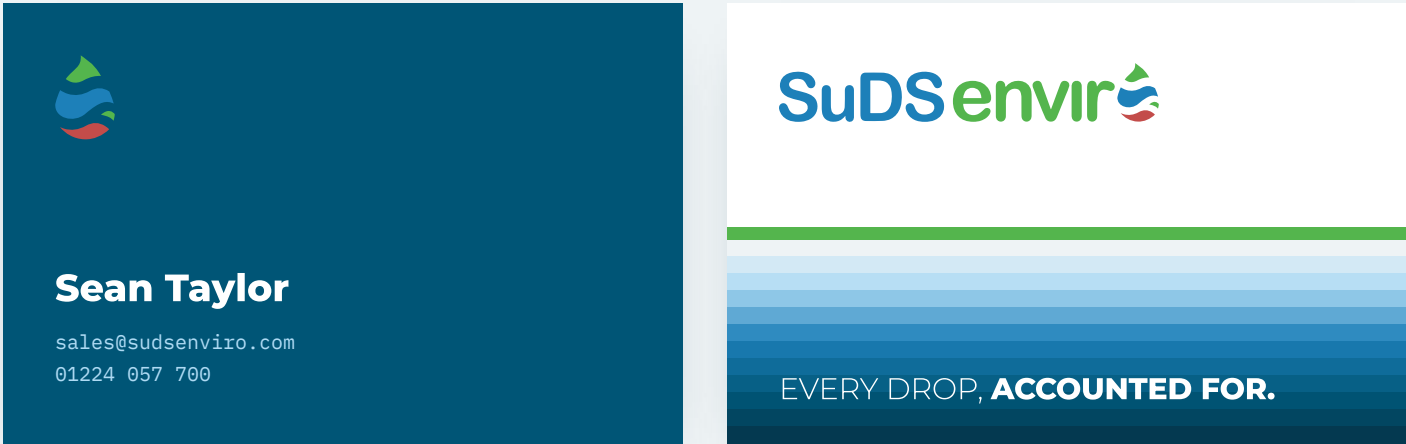

Cards 85 x 55 mm, uncoated 450 gsm. The back carries the cut. The quote cover uses the same cut at the foot of the page, with fields for the project, never a stock photo. The name and number shown are SuDS Enviro's primary contact and sales line.





THE RHINO RANGE

Chambers, catchpits, separators, flow control and pumping stations. From roof to river.


PRODUCT GUIDE · EDITION 1

SEPARATE / STORMWATER TREATMENT

SUDSCEPTOR SEPARATORS

Removes over 50% of fine suspended solids, 0 to 200 microns, at design flows, and up to 99% of coarse solids of 0.1 to 0.4 mm.



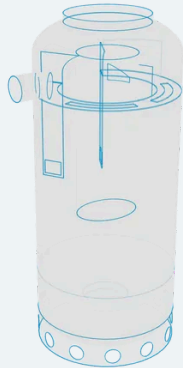

SEHDS750 to SEHDS3000
TSS 0.5 · metals 0.40 · hydrocarbons 0.40



CHAMBER LABEL


SERSIC600

Ø600 mm · depth _____ mm
Inlets 3 · 6 · 9 Outlet 12
Made ____ / ____ / ____
No. _____



Data sheet

A weatherproof label on every chamber, filled in at the factory. Site teams quote the code when they ring, and the QR opens the data sheet. The bands along the foot are the drop laid flat.

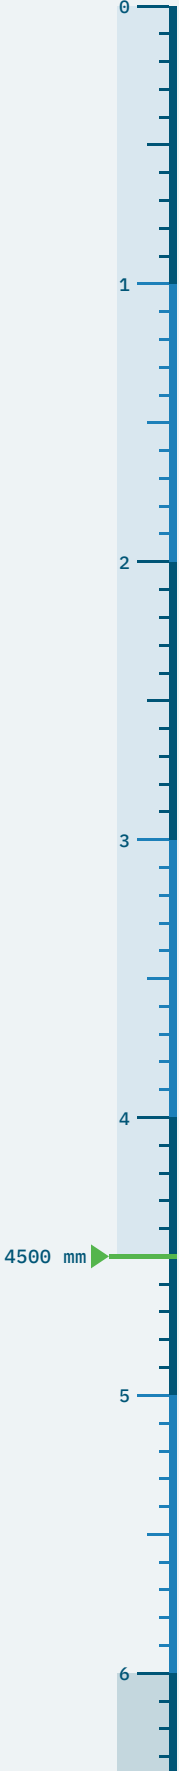

5000 MM / ON SITE AND AT THE OFFICE



Heras fence banner, 3400 x 1730 mm, for sites where SuDS Enviro products are going in. Mesh PVC, eyelets every 500 mm. The chamber in the cut stands where the work is. OneSign.




Hi-vis vest, back print. The drop and the name in Deep, one colour, heat transfer. Above the reflective bands only.



RECEPTION WALL

The horizontal lockup in built-up acrylic letters, 10 mm thick, on 25 mm stand-offs, colours matched to Blue, Green and Red by sample. The slogan below in cut vinyl, Deep. About 1500 mm wide for a typical reception wall. Concept for OneSign; sizes to follow a survey.

Rule that applies to all made things: colours are matched to a physical sample before production, and the logo is cut from the vector master, never traced.

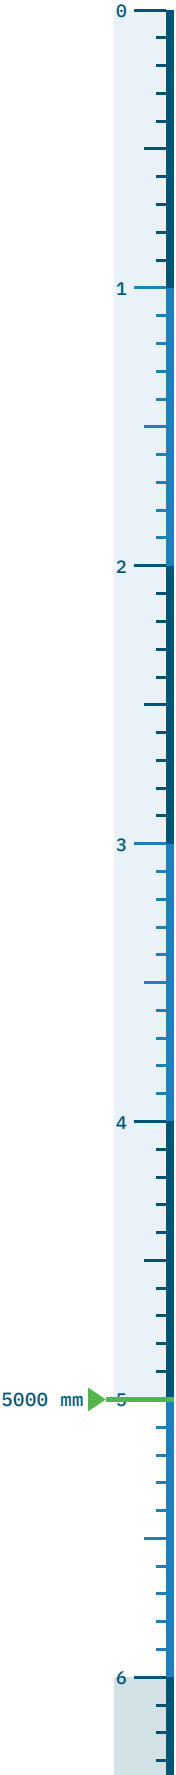

5000 MM / ETCHED AND CUT, FOR ONELASER

PIECES THAT OUTLAST THE PAPERWORK



The Clockwork seal, fibre-laser etched into 300 mm brushed stainless. For the reception wall, awards, and the first chamber off a new line. The seal's type is already outlined, so no fonts are needed.

Laser and etched pieces use the one-colour logo files (black and deep). The bands stay in their order even in one colour.




The service plate, etched stainless riveted inside the access opening of separators and pumping stations. The code, the pipe sizes and the one maintenance number a service engineer needs.



The drop, cut from 6 mm aluminium in four pieces, one per band, mounted 4 mm apart so the layers read in shadow. Powder coated, or left brushed for the factory.

5000 mm

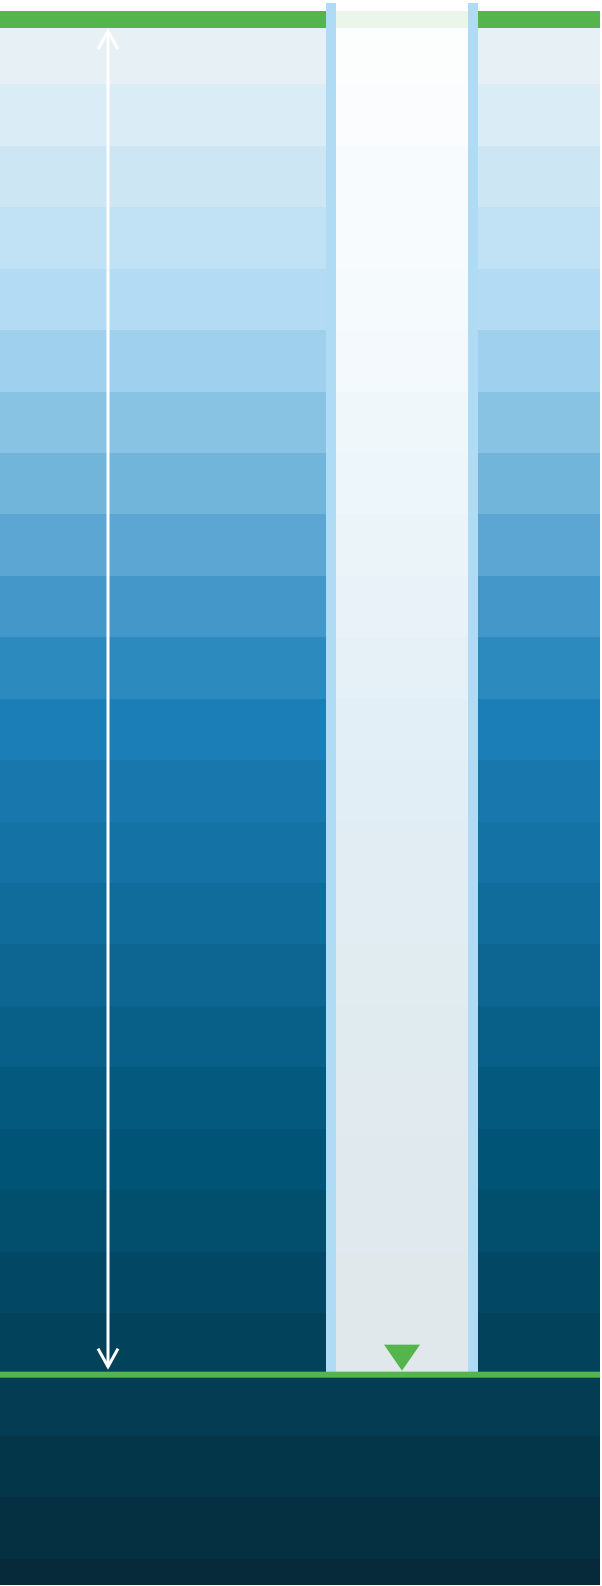


5500mm

MOTION

A 36 second identity film, built as one page and rendered frame by frame. The camera only ever moves down.

RULE	VALUE
Tempo	100 bpm, cuts on the beat
Camera	Down only. Never up, never sideways
Type	Soft rise 12 px, 600 ms, ease out
Drop	Bands settle bottom first, 220 ms apart
Transitions	Water only: ripples, a wave of the four bands, a wash, a rising level
Grain	Light and even, screen only
Formats	16:9 and 9:16, laid out again for each

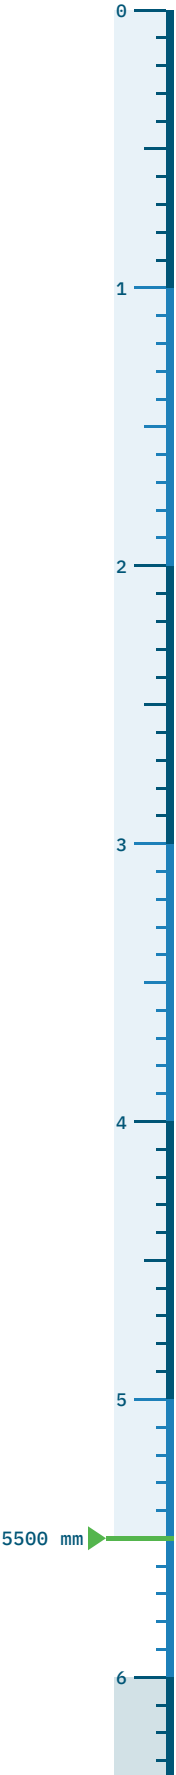

EVERYTHING, AT THE BOTTOM OF THE RANGE

Every mark below is in brand-pack/logos as SVG and as a transparent PNG at 2400 px, named suds- plus the label shown. Type in the seal is converted to outlines, so sign makers and lasers need no fonts.



app-icon-light



app-icon



avatar-deep



avatar



clockwork-seal-filled-deep



clockwork-seal-filled



clockwork-seal-line



drop-black



drop-colour



drop-deep



drop-reversed



drop-white




enviro-horizontal-black




enviro-horizontal-colour



enviro-horizontal-deep

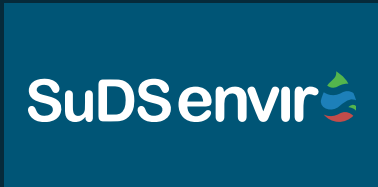

enviro-horizontal-reversed

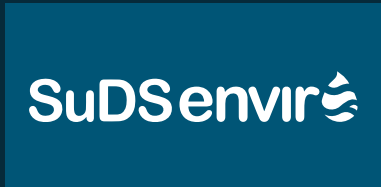

enviro-horizontal-white



rhino-lockup-black



rhino-lockup-colour



rhino-lockup-deep



rhino-lockup-white

brand-book.html and **brand-book.pdf**:
this book.

film/: the identity film, 16:9 and 9:16, 60 fps.

photography/: catalogue set and hero set.

src/: every script that made this pack, so it
can be rebuilt.

EVERY DROP, ACCOUNTED FOR.

BESPOKE, *STANDARDISED*

