

RhinoDuct

MODULAR DRAWPIT CHAMBERS

SERD | SERDP | SERDPR | DATA SHEET

DRAFT - VERIFY BEFORE ISSUE



OVERVIEW

RhinoDuct is a range of rectangular drawpit chambers for ducted utility, telecoms and cable networks. Each chamber is built from interlocking 150 mm deep sections, stacked on site to reach the depth required.

Footprints run from 450 x 450 mm in the Standard range to 1500 x 1500 mm in the Plus and Plus + Reinforcing ranges.

HOW IT BUILDS

Choose the footprint (dimensions A x B), then stack sections until the chamber reaches finished level. Every section is 150 mm deep (dimension C), so the depth is set on site without cutting.

LOADING AND COMPLIANCE


- Tested in accordance with EN 124:1994, classified E600 (all three ranges)
- NJUG Volume 4 guidelines
- Design Manual for Roads and Bridges (DMRB), published by National Highways

RANGES

- **Standard (SERD):** 450 x 450 to 750 x 750 mm
- **Plus (SERDP):** 900 x 450 to 1500 x 1500 mm
- **Plus + Reinforcing (SERDPR):** the Plus footprints with reinforcing

APPLICATIONS

Telecoms and fibre ducting, electrical and utility cable access, and service chambers in footways and highways.

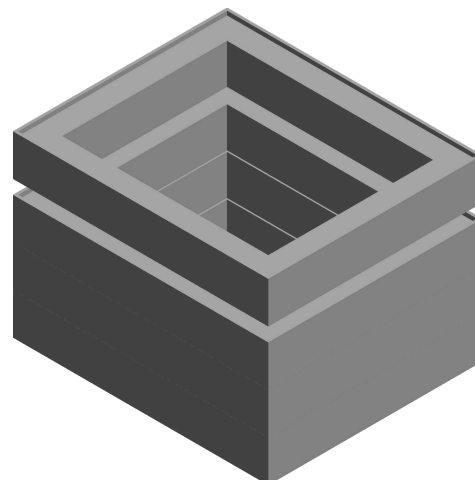

RhinoDuct built from stacked 150 mm sections, from drawing SERD150.

FEATURES & BENEFITS


- Interlocking 150 mm sections, depth set on site
- 19 footprints from 450 x 450 to 1500 x 1500 mm
- Reinforcing option across the Plus sizes
- Tested to EN 124, classified E600
- Manufactured from recycled polymer
- Lighter than concrete to handle and install

SPECIFYING

- Footprint A x B from the size range
- Finished depth, as a number of 150 mm sections
- Standard, Plus or Plus + Reinforcing
- Load class for the location
- Cover type: solid or grated
- Duct entry positions and sizes

SPECIFICATION

Type	Rectangular modular drawpit
Section	150 mm deep, interlocking
Footprints	450 x 450 to 1500 x 1500 mm
Depth	Stack sections to suit
Loading	EN 124:1994, class E600
Material	Recycled polymer
Covers	Solid or grated

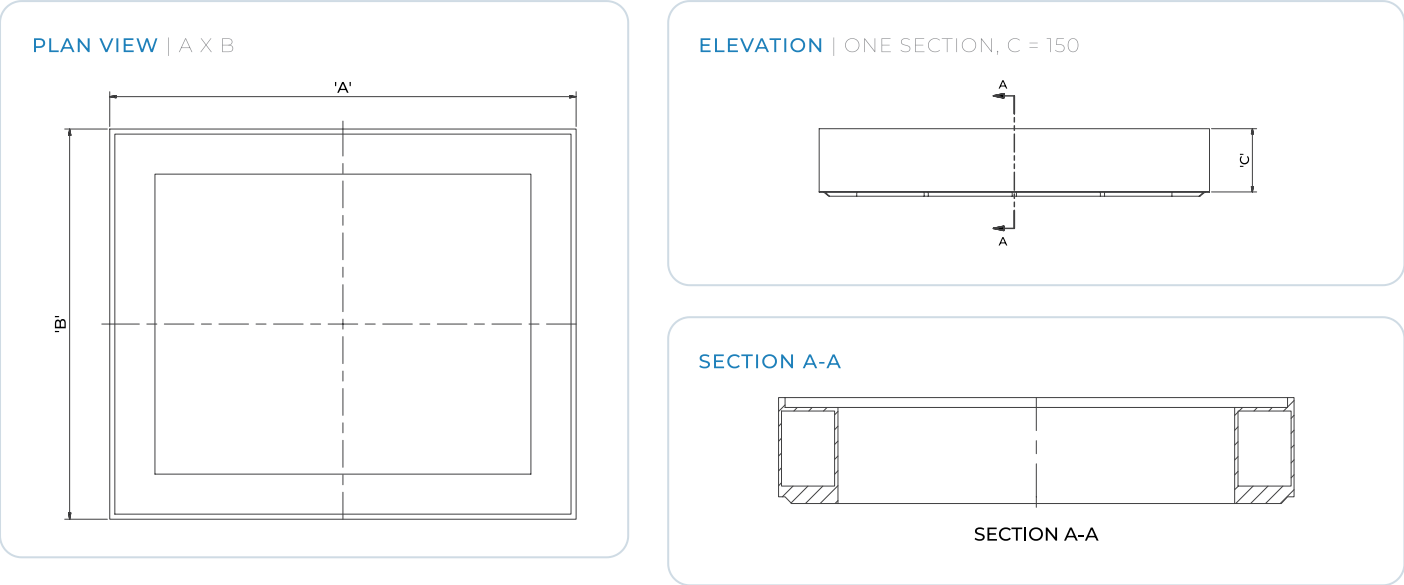

NOT TO SCALE Drawings SERD150, SERDP150 and SERDPR150 share this arrangement. Dimensions in millimetres.

STANDARD RANGE

CODE	A	B	C
SERD4545150	450	450	150
SERD6045150	600	450	150
SERD6060150	600	600	150
SERD7545150	750	450	150
SERD7560150	750	600	150
SERD7575150	750	750	150

READING THE CODES

The code gives the range, then A and B in centimetres, then the 150 mm section depth. SERD6045150 is a Standard chamber 600 x 450 mm built from 150 mm sections. Plus codes start SERDP and Plus + Reinforcing codes start SERDPR.

PLUS AND PLUS + REINFORCING RANGES

PLUS	PLUS + REINFORCING	A	B	C
SERDP9045150	SERDPR9045150	900	450	150
SERDP9060150	SERDPR9060150	900	600	150
SERDP9075150	SERDPR9075150	900	750	150
SERDP9090150	SERDPR9090150	900	900	150
SERDP12045150	SERDPR12045150	1200	450	150
SERDP12060150	SERDPR12060150	1200	600	150
SERDP12075150	SERDPR12075150	1200	750	150
SERDP120120150	SERDPR120120150	1200	1200	150
SERDP15060150	SERDPR15060150	1500	600	150
SERDP15075150	SERDPR15075150	1500	750	150
SERDP150900150	SERDPR150900150	1500	900	150
SERDP150120150	SERDPR150120150	1500	1200	150
SERDP150150150	SERDPR150150150	1500	1500	150

BEFORE ISSUE

This sheet is built from the RhinoDuct general arrangement drawings SERD150, SERDP150 and SERDPR150 (September 2022). The material, cover options, applications and the NJUG and DMRB references come from the SuDS Enviro website and have not yet been matched to an official RhinoDuct data sheet. The drawings classify every range E600; confirm any other load class with SuDS Enviro before specifying.

SPECIFY RHINODUCT

Tell us the footprint, depth, load class and cover type and we will quote a complete drawpit.

COMPANY	SuDS Enviro
ENQUIRIES	sales@sudsenviron.com
TELEPHONE	01224 057 700
WEB	www.sudsenviron.com