

RhinoPod

FLOATING CARTRIDGE FILTER

RHINOPOD | SERPOD1850 | DATA SHEET



OVERVIEW

RhinoPod is a floating cartridge filter that intercepts dissolved-phase pollutants in surface water runoff, including zinc, copper, phosphate (PO_4) and polycyclic aromatic hydrocarbons (PAHs).

Runoff from car parks, roads and industrial yards carries sediment, plastics and oils alongside invisible contaminants such as dissolved metals, phosphates and hydrocarbons. RhinoPod targets the dissolved fraction that conventional separators leave behind.

HOW IT WORKS

The pod needs no mounting. It is gravity-held in standing water, and self-guided flow channels carry water through the filter cartridge. There is no electrical demand and head loss is low, so pods can be deployed at local drainage points across a site.

TWO-STAGE TREATMENT


Paired with the SudSceptor hydrodynamic separator, which captures suspended solids, grit, oils and hydrocarbons, RhinoPod forms a dual-stage treatment train covering both gross and dissolved pollutants.

WHERE IT GOES

- Road gullies (450 to 600 mm)
- GRP or precast chambers, with 1 to 4 pods
- Oil interceptors and retrofit drainage units
- The SERPOD1850 filter tank, with six pods

APPLICATIONS

Petrol stations, logistics yards, commercial estates and depots: any site with several drainage points where pollutant interception is needed at each outfall.

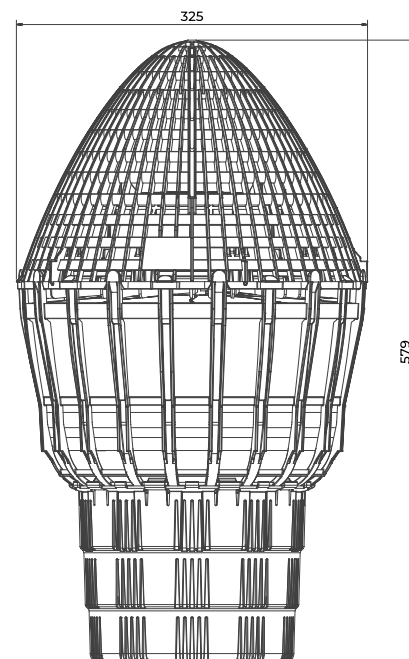

RhinoPod elevation. $\text{Ø}325 \times 579$ mm, from drawing RhinoPod. **NOT TO SCALE**


FEATURES & BENEFITS

- Targets dissolved zinc, copper, phosphate and PAHs
- No mounting, gravity-held in standing water
- Self-guided flow channels
- No electrical demand, low head loss
- Retrofit-ready, no disruption to surface finishes
- Surface or subsurface installation


SPECIFICATION

Product	Floating cartridge filter
Size	$\text{Ø}325$ mm, 579 mm high
Targets	Zinc, copper, phosphate, PAHs
Fixing	None, gravity-held in standing water
Power	None
Hosts	Gullies, chambers, interceptors, SERPOD1850
Install	New build or retrofit


ELEVATION

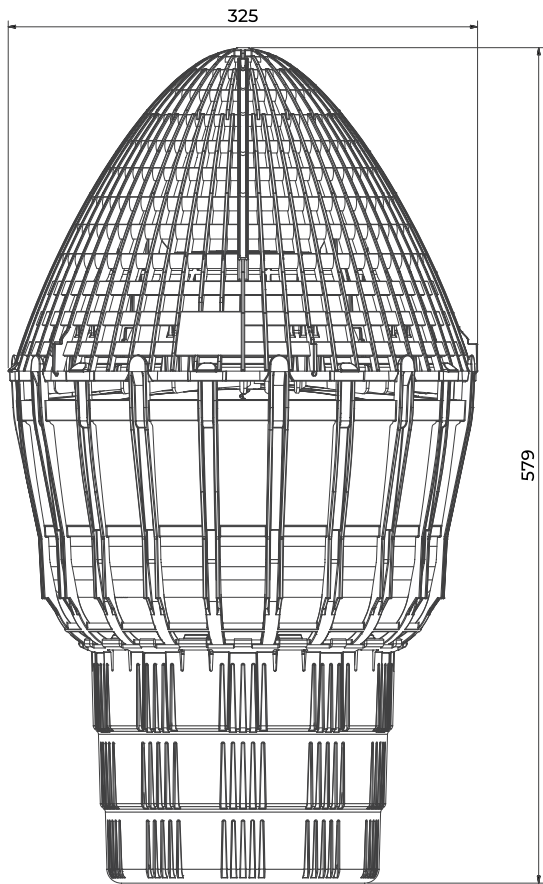

TOP VIEW

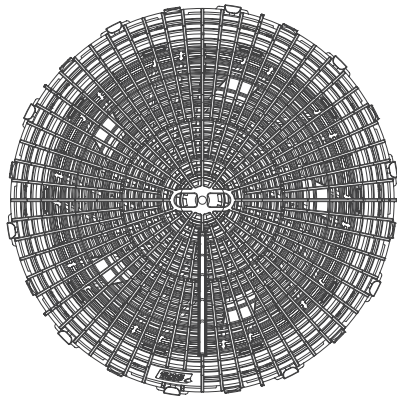

UNDERSIDE

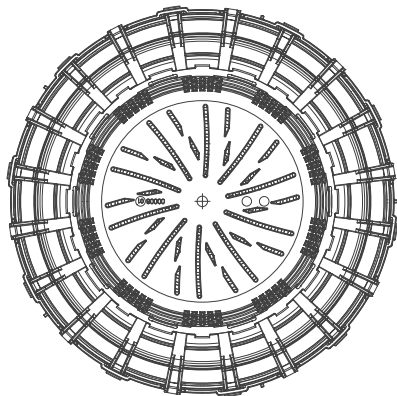

NOT TO SCALE Drawing RhinoPod, floating filter. Dimensions in millimetres.


MITIGATION INDEX

Pollutant removal reported for the SudSceptor, RhinoPod and the combined system in independent laboratory and field testing in Sweden and the UK, with particular focus on pollutants relevant to the EU Water Framework Directive.


POLLUTANT	SUDSCEPTOR	RHINOPOD	COMBINED SYSTEM
Zinc (Zn)	40 to 55%	85 to 90%	92 to 95%
Copper (Cu)	20 to 30%	82 to 88%	90 to 93%
Phosphate (PO ₄)	0%	80 to 85%	85%
PAHs (e.g. fluoranthene)	0%	65 to 75%	70 to 80%
Hydrocarbons (oils)	90%	65 to 70%	95%
Suspended solids (TSS)	80 to 90%	10 to 20%	90 to 92%

Source: SuDS Enviro SudSceptor and RHINO POD brochure with mitigation index (July 2025). Results depend on site conditions and loading.


PLAN VIEW | SIX PODS AND A COALESCING FILTER

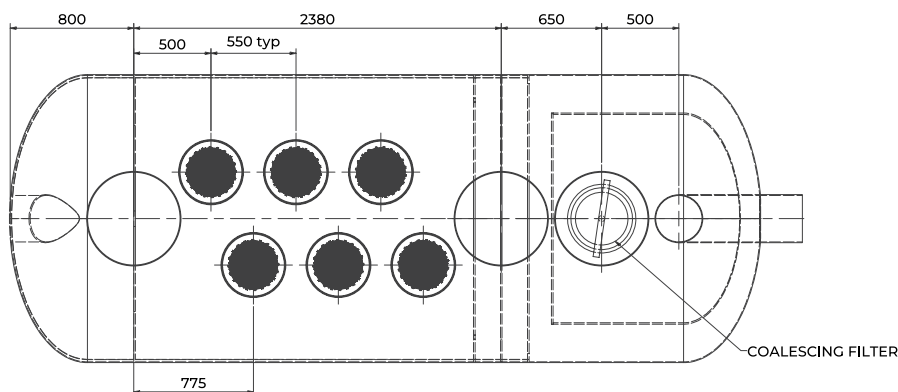


LONG SECTION

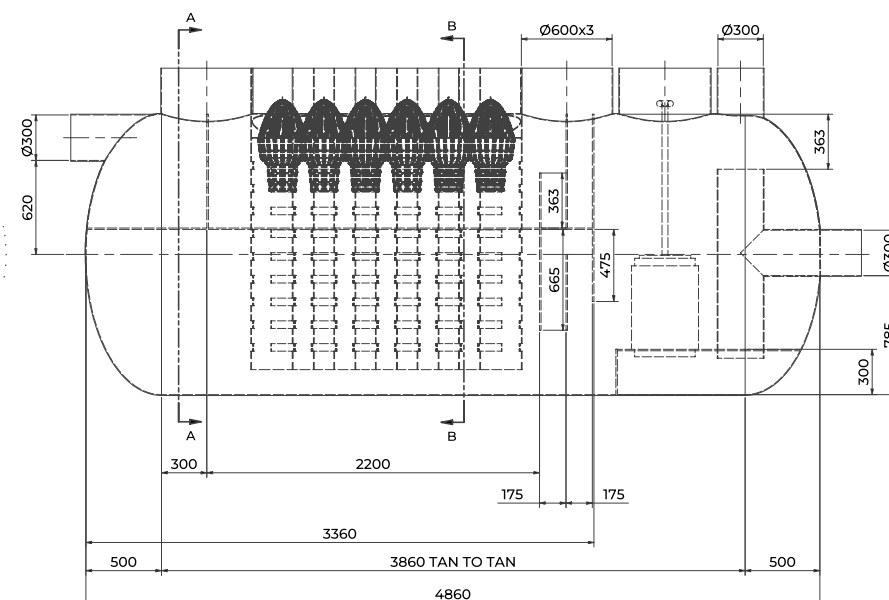

SECTION A-A

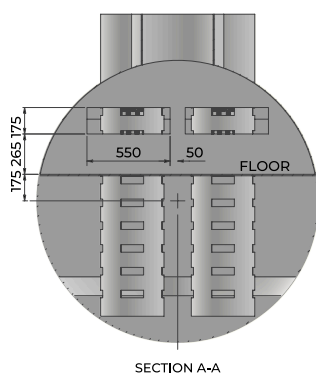

SECTION B-B

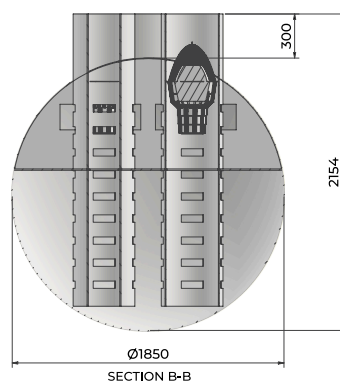

SERPOD1850

NOT TO SCALE Reproduced from the SuDS Enviro drawing pack for illustration. Dimensions in millimetres. Confirm project dimensions against the order drawing.

DEPLOYMENT OPTIONS


- **Standalone filter** in a road gully, GRP or precast chamber, or an existing oil interceptor
- **Multi-pod chamber** with 1 to 4 pods in a GRP or precast chamber
- **Filter tank** such as the SERPOD1850, with six pods and a coalescing filter
- **Treatment train** with the SudSceptor installed in line upstream of attenuation or discharge points

THE SUDSCEPTOR PAIRING

The SudSceptor is a vortex-based separator that captures suspended solids, grit, oils and hydrocarbons. RhinoPod then intercepts the dissolved-phase pollutants. The modular pairing supports surface and subsurface installation, designed in from the outset or added by retrofit.

WHY DECENTRALISE

For sites with multiple drainage points, intercepting pollutants at source gives greater control and often better cost-efficiency than one large central system. Pods placed in local gullies, separators or chamber-based filtration points shorten pipe runs, lower capital cost and build compliance in at every vulnerable outfall.

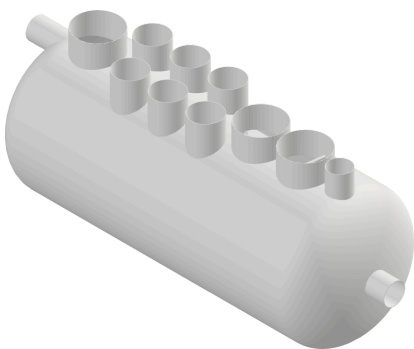

ONE TANK, TWO STAGES

In the SERPOD1850 filter tank, flow from the Ø300 inlet passes through a bay of six RhinoPods and then a coalescing filter before leaving by the Ø300 outlet. Access shafts sit over the pod bay and the filter. See page 3 for the general arrangement.

MAINTENANCE

Pods need no mounting or fixings. Ask our technical team for inspection and replacement intervals to suit the site loading.

TELL US ABOUT THE SITE

- Number and type of drainage points
- Gully or chamber sizes, new or existing
- Catchment area and use (yard, forecourt, car park)
- Pollutants of concern and any discharge consent
- Whether a SudSceptor or separator is planned upstream

We provide layout support and chamber specifications for RhinoPod schemes.

COMPLIANCE

- Tested against pollutants relevant to the EU Water Framework Directive (2000/60/EC)
- Supports Schedule 3 SuDS design guidance

PERFORMANCE AT A GLANCE

- RhinoPod alone: high removal of zinc, copper and phosphate
- Medium removal of PAHs and hydrocarbons
- Low removal of suspended solids, so pair with a separator upstream

SPECIFY RHINOPOD

Contact us for layout support, chamber specifications or to add RhinoPod and SudSceptor to your SuDS scheme.

COMPANY	SuDS Enviro
ENQUIRIES	sales@sudsenviron.com
TELEPHONE	01224 057 700
WEB	www.sudsenviron.com