

RhinoLift

PACKAGED PUMPING STATIONS

SINGLE PUMP | DUTY-STANDBY | DATA SHEET

SuDS
enviro
BESPOKE, STANDARDISED

OVERVIEW

RhinoLift packaged pumping stations move foul water, stormwater and grey water where gravity drainage is impractical or impossible. Each station is custom-built to the flow and storage the project needs, from a single dwelling to large commercial sites.

Chambers are MDPE or GRP for strength and durability. Stations are fitted with vortex or macerator pumps, as a single pump or a dual duty-standby pair.

HOW IT WORKS

Flow collects in the chamber and is pumped from the low-lying area to a higher point for onward treatment or disposal. Vortex pumps pass solids of up to 50 mm diameter. In a duty-standby station one pump runs while the other stands ready, so the station keeps working through peak demand or maintenance.

DESIGN COMPLIANCE

- BS EN 12050-1 lifting plants for wastewater containing faecal matter
- Building Regulations Part H
- Water Industry Act 1991
- Electrical Equipment (Safety) Regulations


CHAMBER SIZES



Standard chambers in MDPE or GRP. Larger bespoke stations are built to order, as in the drawings on pages 2 and 3.

APPLICATIONS

- Sewage from residential, commercial and industrial sites
- Stormwater from driveways, car parks and roofs
- Grey water systems in homes and commercial buildings

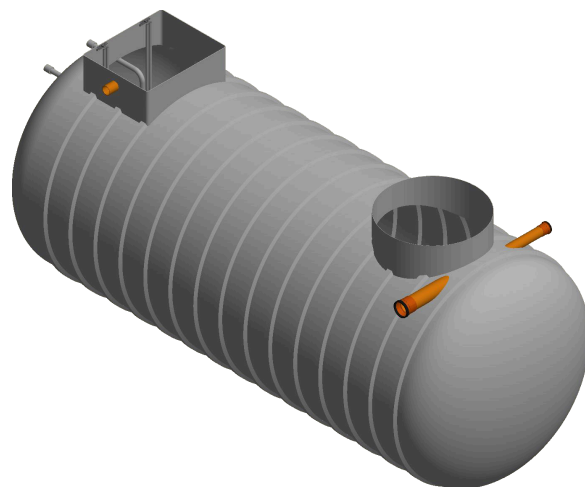

SERLT 30000. A bespoke packaged pump station from the SuDS Enviro drawing pack.


FEATURES & BENEFITS

- MDPE or GRP chamber
- Single vortex pump or dual duty-standby
- Vortex pumps pass solids up to 50 mm
- Optional macerator pumps for fine grinding
- Built to order for each site
- Optional high-level alarms and telemetry
- Optional Bluetooth monitoring and diagnostics

SPECIFICATION


Chamber	MDPE or GRP
Sizes	600, 750, 900, 1050, 1200 mm
Pumps	Vortex (solids to 50 mm) or macerator
Configuration	Single pump or dual duty-standby
Controls	High-level alarm, telemetry, Bluetooth options
Lead time	Built and delivered in 24 to 48 hours
Warranty	1 year, terms apply

PLAN VIEW

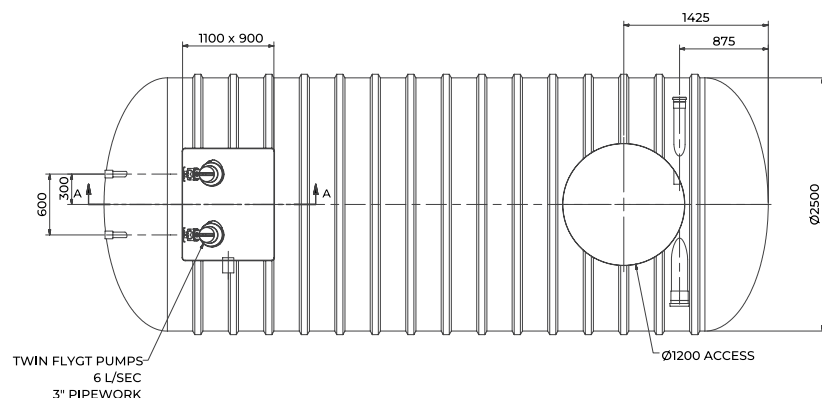


SERLT 30000


SIDE ELEVATION

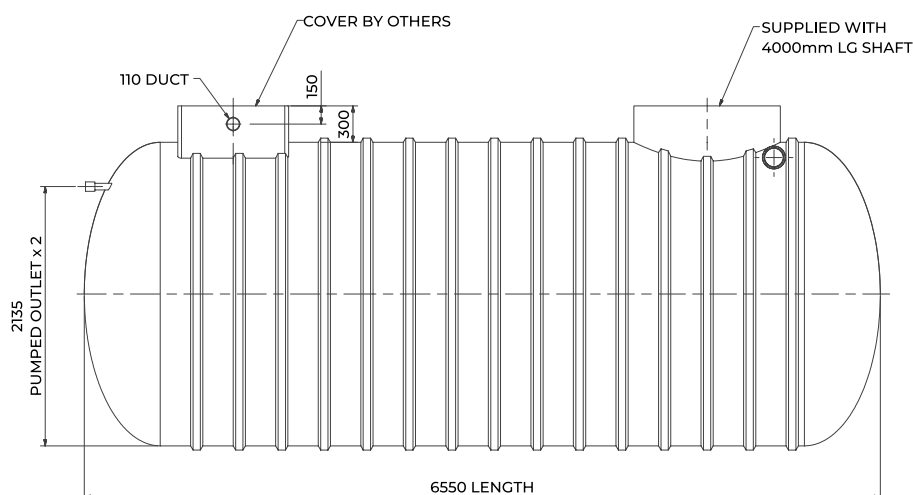

END ELEVATION

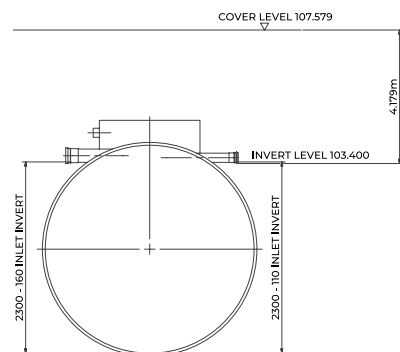

SECTION A-A

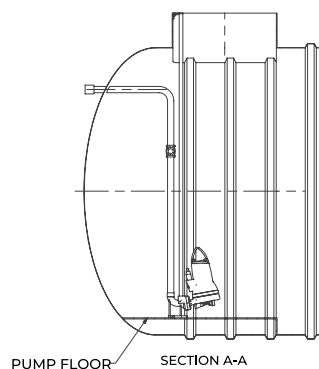


READING THE DRAWING

Drawing SERLT 30000 shows a bespoke station built around a Ø2500 horizontal tank. Two Flygt pumps sit on a pump floor under a 1100 x 900 kiosk and discharge through twin pumped outlets.


The 160 and 110 inlets enter at 2300 mm above the tank base, 4.179 m below cover level.

NOT TO SCALE Reproduced from the SuDS
Enviro drawing pack for illustration. Dimensions in
millimetres unless stated. Confirm project
dimensions against the order drawing.


PLAN VIEW

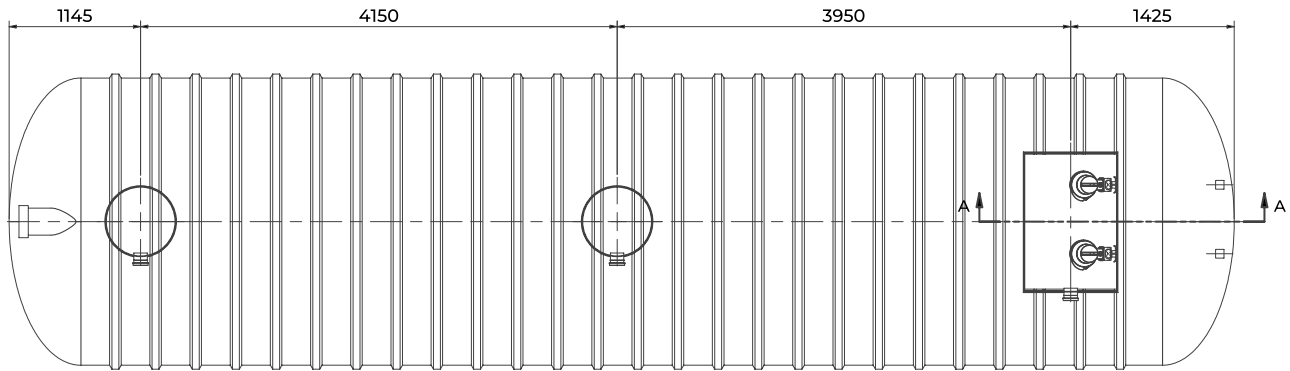


SIDE ELEVATION

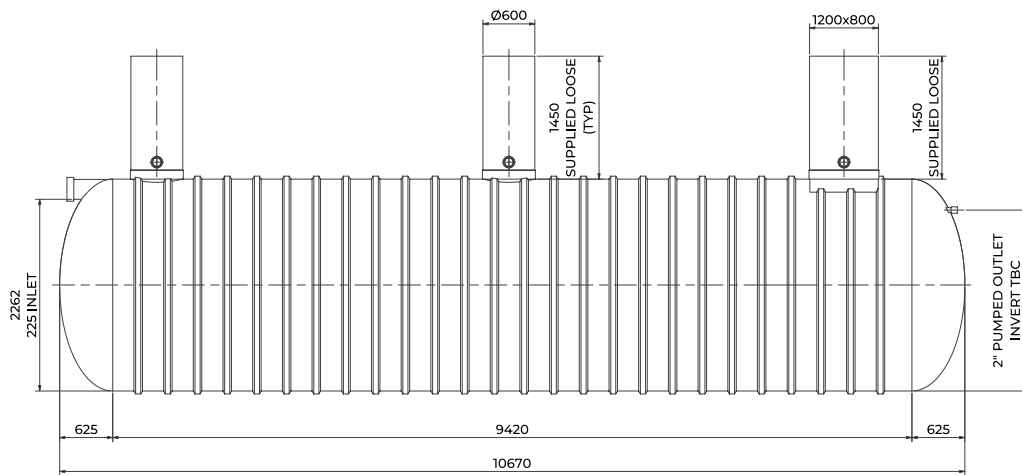

END ELEVATION

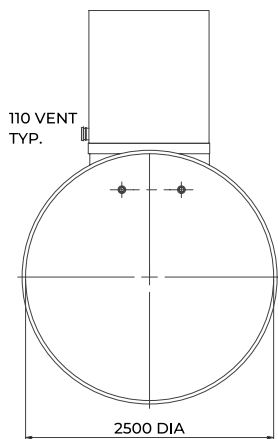

SECTION A-A

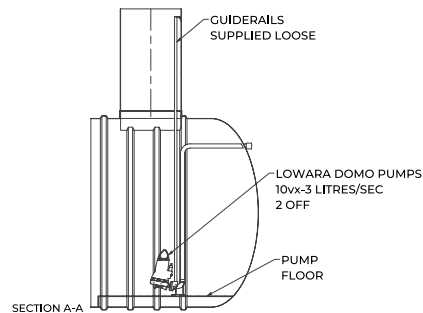

SEBT2550SHD

Type	Packaged pump station, backwash tank
Tank	2500 dia, 10670 mm overall
Inlet	225, 2262 mm above base
Outlet	2 inch pumped, invert to be confirmed
Pumps	2 off Lowara DOMO 10VX, 3 L/s
Access	2 x Ø600 and 1 x 1200 x 800, 1450 mm, supplied loose
Pump kit	2 x DN50 stools, 4 x 10 m Taurus floats, 2 x 3 m chains and shackles, guiderails supplied loose

NOT TO SCALE Reproduced from the SuDS Enviro drawing pack for illustration. Dimensions in millimetres. Confirm project dimensions against the order drawing.

INVERT DEPTH


- Adoptable installations: invert depth up to 2000 mm to the soffit of the pipe
- Non-adoptable installations: invert depth up to 3000 mm
- Deeper bespoke stations are designed to order, as in drawing SERLT 30000

PUMP OPTIONS

- Vortex pumps for solid waste up to 50 mm diameter
- Macerator pumps where fine grinding of solids is needed
- Single pump, or dual pumps in a duty-standby arrangement

CONTROLS AND MONITORING

- High-level alarms
- Telemetry systems for remote monitoring and control
- Bluetooth connectivity for monitoring and diagnostics

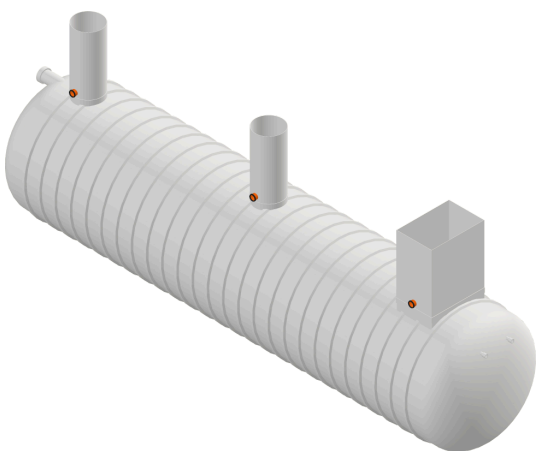

SIZING INPUTS

- System type: foul, surface water or grey water
- Design flow rate (L/s)
- Total head (m)
- Single pump or duty-standby
- Vortex or macerator pump
- Controller: standard, alarm, telemetry or Bluetooth
- Chamber diameter and depth
- Adoptable or non-adoptable
- Outlet pipe size: 110, 160, 225 or 300 mm

Our technical team returns a station built to your flow, storage and site conditions.

COMPLIANCE

- BS EN 12050-1 lifting plants for wastewater containing faecal matter
- Building Regulations Part H, drainage and waste disposal
- Water Industry Act 1991, relevant sections for drainage
- Electrical Equipment (Safety) Regulations for electrical components

BUILT TO THE BRIEF

Every RhinoLift is configured to the flow rate, storage and site conditions of the project. The SEBT2550SHD backwash tank on page 3 shows how far the range scales: a 10.67 m tank with two access shafts and a pump chamber, with the pumps, floats and guiderails supplied as a complete kit.

LEAD TIME AND WARRANTY

Stations are built and delivered to site within 24 to 48 hours. Each station comes with a 1-year warranty (terms apply).

SPECIFY RHINOLIFT

Send us the flow, head and storage your site needs and our technical team will configure a station.

COMPANY	SuDS Enviro
ENQUIRIES	sales@sudsenviron.com
TELEPHONE	01224 057 700
WEB	www.sudsenviron.com