


SudSceptor

HYDRO-DYNAMIC SEPARATOR

SEHDS1800 | DATA SHEET

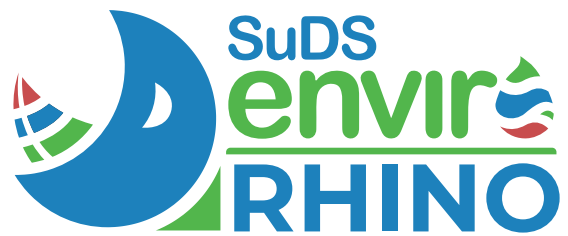

OVERVIEW

The SudSceptor is a Hydrodynamic Separator with a unique design with a proven and tested Performance. Designed for use within SUDS treatment trains, providing certainty of water quality treatment, enabling enhanced amenity and bio-diversity downstream. Protecting and defending downstream controlled waters from sediment bound pollutants.

Units within the SudSceptor Range have been designed in accordance with * NJDEP protocol, + "best advice" (in part as NJDEP only covers TSS), British Water Code of Practice .

Please note that USA NJDEP has no regulatory role or authority in the UK and Ireland. It can be used on-line or off-line and with or without an external by-pass unit. Multi treatment water purification processes are involved.

DESIGN COMPLIANCE

- NUDEP 2015 & 2020
- DIBt.

PERFORMANCE & HYDRAULICS

The SudSceptor removes sediment bound contaminants. Available in differing sizes to suit site flows and conditions. The SudSceptor removes over 50% of fine TSS (0-200 microns, median size 75 microns) at design flows and up to 99% of TDS 0.1 to 0.4mm (coarse).

MITIGATION INDICES	TSS	METALS	HYDROCARBONS
NJDEP*	0.5	---	---
SUDSCEPTOR	0.5	0.40	0.40



* NJDEP protocol, + "best advice" (in part as NJDEP Only covers TSS), British Water Code of Practice

DIMENSIONAL & STORAGE DATA

- Treatment Flow Rate : 73 L/s
- Hydraulic Capacity Flow : 222 L/s
- Max Head Loss: 500mm

DIMENSIONAL & STORAGE DATA

- Overall Height: 4290 mm
- Chamber Diameter: 1800 mm
- Height to Invert Inlet: 1320 mm
- Base Height to Invert Outlet: 2970 mm
- Max Inlet/Outlet Diameter: 600 mm
- Sediment Storage Capacity: 1027 litres
- Oil/Debris Storage Capacity: 1462 litres

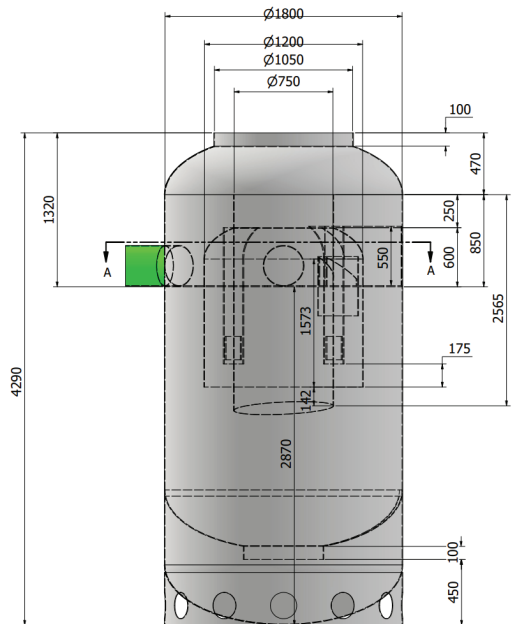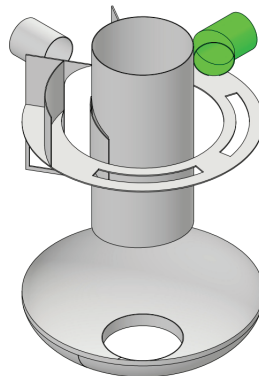

FEATURES & BENEFITS

- Single-piece unit
- Cannot air lock
- Wide variety of connection options available
- Inlet deflector plate promotes cyclic process
- Floatable materials and liquids are retained
- Settled solids are prevented from remobilisation
- Uniform flow pathway via distributed upwards flow
- Weir ensures optimised flow pathways
- Easy maintenance
- 10-year warranty

Extrapolated values are based on the guidelines outlined in the British Water 'How to Guide: Applying the CIRA The SuDS Manual (C753)' utilizing the Simple Index Approach (Version 7, Section 4.3, 2021 - pre-publication)."


CHAMBER OPTIONS:

SudSceptor SEHDS750 and SEHDS1000 units are manufactured from BBA CERTIFICATED HIGH DENSITY POLYETHYLENE TWINWALL PIPE. Models SEHDS1200, SEHDS1500, SEHDS1800, SEHDS2500 & SEHDS300 are built using Glass Reinforced Plastic (GRP) and comply fully with BS 4994:1987 – Specification for Design and Construction of Vessels and Tanks in Reinforced Plastics

The SudSceptor range features larger pipe connections, ideal for sites with higher peak flows, and offers easy integration with UK structural wall drainage systems.

INSTALLATION:

The installation design should consider traffic loadings, ground conditions and variable ground water elevations. If in any doubt consult your schemes' Designer/Engineer. A suitably qualified professional is required to sign off the installation.

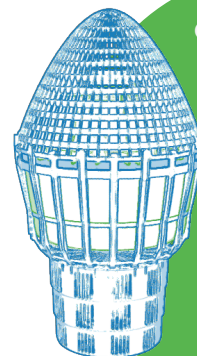

OPTIONAL POLISHING FILTER

The RHINOPOD polishing filter is engineered to capture a wide range of harmful substances, including oils, polycyclic aromatic hydrocarbons (PAHs), phosphorus, nitrogen, and phosphate (PO₄). It is capable of removing the 33 priority substances identified in the EU Water Framework Directive, as well as heavy metals such as cadmium, copper, zinc, nickel, lead, and mercury.

