

RHINO SERDS

ADVANCED PLUS 600 SERIES CATCH-PIT

SERDS450 TO SERDS1200 | DATA SHEET



OVERVIEW

RHINO SERDS, the Advanced Plus 600 Series, is a range of catch-pit chambers engineered for the efficient catchment and removal of silt and debris from impermeable or hard surface areas such as paths, driveways, patios, roofs, car parks, roads and highways. A primary and secondary filtration system improves downstream water quality and reduces the risk of flooding.

Integrated into a Sustainable Drainage System, SERDS supports compliance with regulatory requirements for flood mitigation and water treatment. Six chamber diameters, from 450 to 1200 mm, cover small residential plots through to highway and commercial schemes.

SERDS450
Ø450 mm

SERDS600
Ø600 mm

SERDS750
Ø750 mm

SERDS900
Ø900 mm

SERDS1050
Ø1050 mm

SERDS1200
Ø1200 mm

HOW IT WORKS

Stormwater flows into the chamber, where the primary filtration catches larger particles and the secondary filtration captures finer sediments. Solids settle out in the sump below the pipe inverts before filtered water is discharged into the drainage system, reducing the load on downstream infrastructure.

DESIGN COMPLIANCE


- EN 13598 Part 2 (2009) thermoplastic inspection chambers
- Design and Construction Guidance (DCG)
- Sewers for Adoption 7th Edition (SfA7)
- Building Regulations Part H1
- Adoptable and non-adoptable applications

CHAMBER OPTIONS


Sump depths are standard or made to suit the project. Inlet orientation depends on the chosen pipework configuration and diameter. An optional reduction cap with a Ø320 mm opening is shown on the 450 and 600 drawings.

INSTALLATION

The prefabricated one-piece design saves significant time compared with traditional in-situ construction. Bed and surround to suit the loading and ground conditions, and have the installation signed off by a suitably qualified professional.

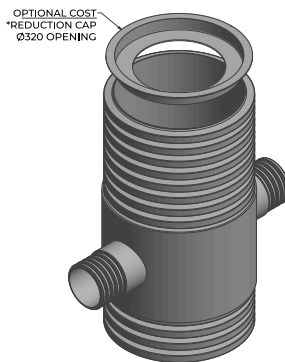

Ø450 chamber with optional reduction cap.

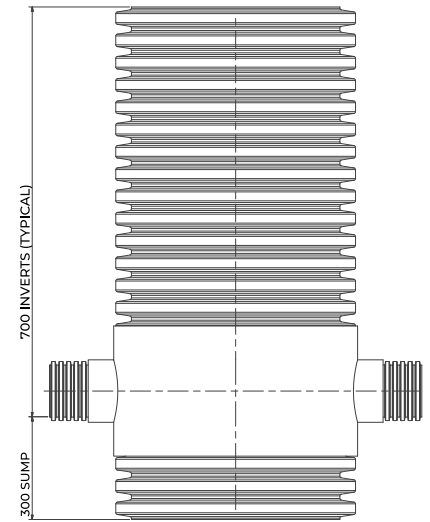

Ø600 chamber, side elevation. Dimensions in mm from drawing SERPT600150-1.

NOT TO SCALE


FEATURES & BENEFITS

- Primary and secondary filtration
- Sump collects settled silt and debris
- Multiple inlet and outlet configurations
- Standard or bespoke sump depths
- Anti-fracture thermoformed base
- Light-duty to full-traffic loading
- Prefabricated one-piece unit
- Chemical and corrosion resistant

SPECIFICATION

Sizes	SERDS450, 600, 750, 900, 1050, 1200 (Ø450 to 1200 mm)
Material	HDPE, extruded and thermoformed
Filtration	Primary and secondary filtration systems
Flow capacity	Dependent on chamber size and configuration
Load rating	Light-duty to full-traffic applications
Depth	Adoptable up to 2000 mm, non-adoptable up to 3000 mm to pipe soffit
Access	Max 350 mm opening where pipework is over 1 m deep

PLAN VIEW A-A | OUTLET AT 12, INLET AT 6

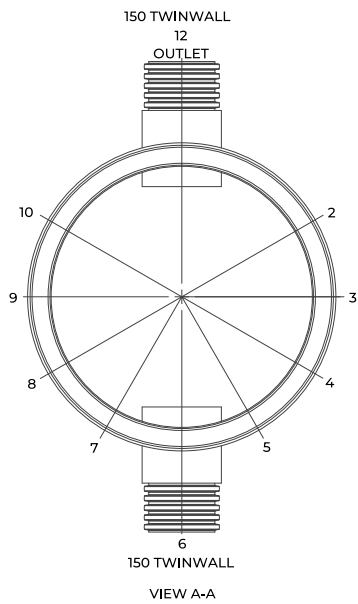


SERPT600150-1

Chamber	Ø600 mm
Overall height	1000 mm
Inlet	150 twinwall at 6 o'clock
Outlet	150 twinwall at 12 o'clock
Inverts	700 mm below top (typical)
Sump	300 mm below the inverts
Access	Optional reduction cap, Ø320 mm opening

Drawing reference from the SuDS Enviro drawing pack for the Ø600 catch-pit body.

FRONT ELEVATION AND SIDE ELEVATION

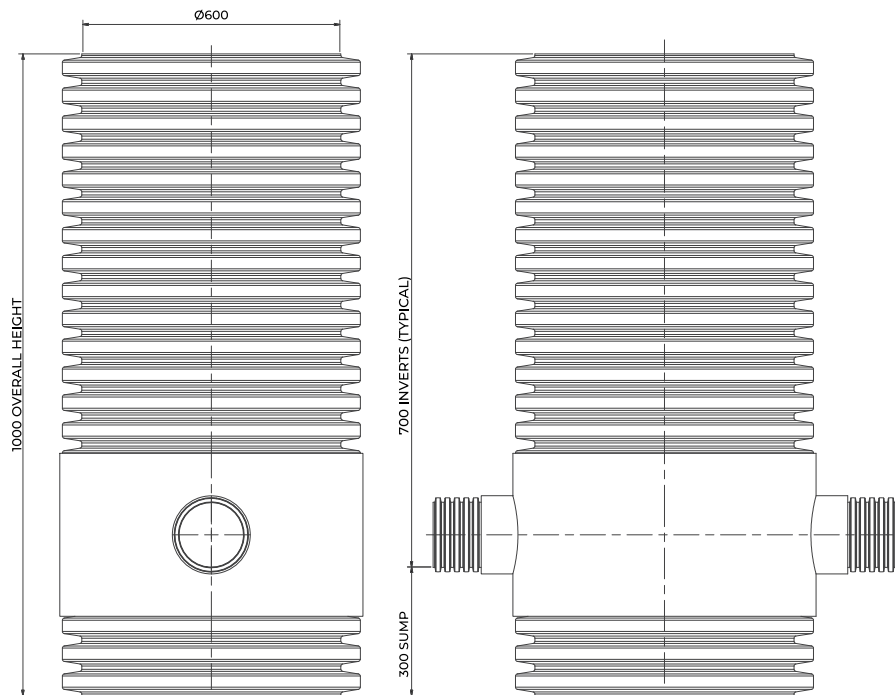

READING THE DRAWING

Drawing SERPT600150-1 shows a Ø600 chamber with 150 mm twinwall inlet and outlet and a 1 m overall height. Invert levels are measured down from the top of the chamber.

Both pipes sit at the same 700 mm typical invert, leaving a 300 mm sump below them where solids settle out.

Inlet orientation depends on the chosen pipework configuration and diameter. Sump depth can be increased to suit the catchment and maintenance cycle.

NOT TO SCALE Reproduced from the SuDS Enviro drawing pack for illustration. Dimensions in millimetres. Confirm project dimensions against the order drawing.

1 PRIMARY FILTRATION

Stormwater from paths, roofs, car parks and highways flows into the chamber. The primary filtration catches the larger particles and debris before they can travel on into the drainage network.

2 SECONDARY FILTRATION AND SETTLEMENT


The secondary filtration captures finer sediments. Solids settle out in the sump below the pipe inverts, and filtered water is discharged into the drainage system, preventing blockages in pipes and manholes.

3 MINIMAL MAINTENANCE

The system is designed for efficient stormwater management with minimal maintenance. Custom sump depths extend the interval between cleans on catchments with a heavy silt load.

4 BUILT FOR THE LONG TERM


A thermoformed base gives structural strength and reduces the risk of fracture during installation and long-term use. HDPE gives broad resistance to hydrogen sulphide, corrosive acids and bases.

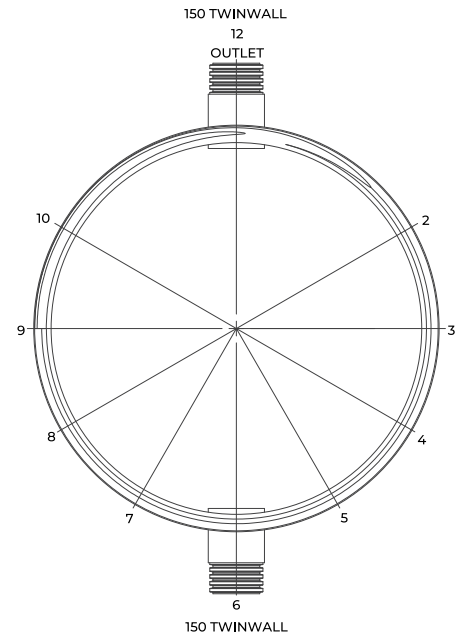

Ø1200 chamber plan. Drawing SERPT1200150-1.

NOT TO SCALE

Ø1200 CHAMBER | SIDE ELEVATION

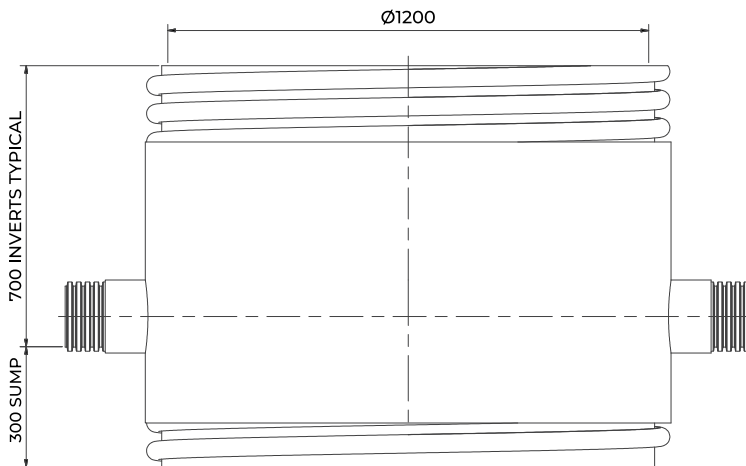


The large-diameter body keeps the same 700 mm typical inverts and 300 mm sump as the Ø600 unit on the drawn 1 m configuration.


APPLICATIONS

- Paths and walkways
- Driveways and patios
- Roofs
- Car parks
- Roads and highways
- Commercial and industrial areas


For projects that need effective sediment and debris control, improved water quality and sustainable stormwater management.

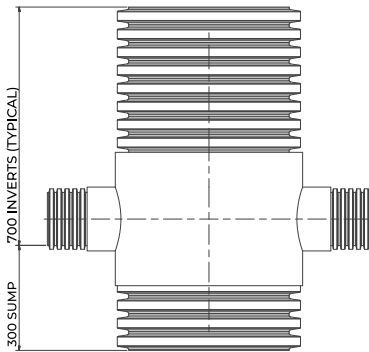

Ø450 - drawing SERPT450150-1

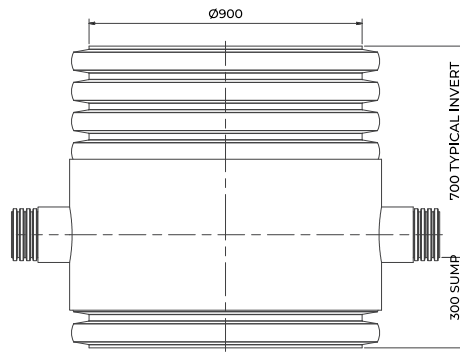

Ø900 - drawing SERPT900150-1

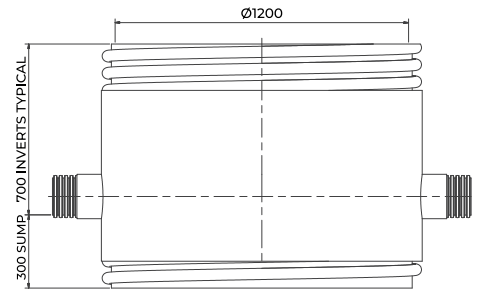

Ø1200 - drawing SERPT1200150-1

NOT TO SCALE Elevations are shown at different scales so each fits the column. Each is one drawn configuration; overall height, pipework, sump depth and inlet positions are made to order.

CODE	CHAMBER	DRAWN PIPEWORK	OVERALL HEIGHT	INVERTS (TYPICAL)	SUMP	DRAWING
SERDS450	Ø450 mm	150 twinwall	1000 mm	700 mm	300 mm	SERPT450150-1
SERDS600	Ø600 mm	150 twinwall	1000 mm	700 mm	300 mm	SERPT600150-1
SERDS750	Ø750 mm	150 twinwall	1000 mm	700 mm	300 mm	SERPT750150-1
SERDS900	Ø900 mm	150 twinwall	1000 mm	700 mm	300 mm	SERPT900150-1
SERDS1050	Ø1050 mm	150 twinwall	1000 mm	700 mm	300 mm	SERPT1050150-1
SERDS1200	Ø1200 mm	150 twinwall	1000 mm	700 mm	300 mm	SERPT1200150-1

Invert levels are measured down from the top of the chamber. Drawings are catch-pit body references from the SuDS Enviro drawing pack.

INSTALLATION

- Bed and surround to suit the loading class and ground conditions
- Allow for variable groundwater levels
- Set inlet and outlet to the design inverts
- Where pipework is over 1 m deep, fit restricted access of 350 mm maximum
- Have the installation signed off by a suitably qualified professional

COMPLIANCE

- EN 13598-2 (2009)
- DCC, adoptable and non-adoptable
- SfA7 (Sewers for Adoption)
- Building Regulations Part H1
- DCC restricted access: max 350 mm opening over 1 m depth

SPECIFY RHINO SERDS

Advanced Plus 600 Series. Contact our technical team for project-specific configuration and sump sizing.

COMPANY SuDS Enviro
ENQUIRIES sales@sudsenviron.com
TELEPHONE 01224 057 700
WEB www.sudsenviron.com