Nominal wall category versus exact target bearing

Conceptual overhead geometry; target position within a wall changes the realized angle.

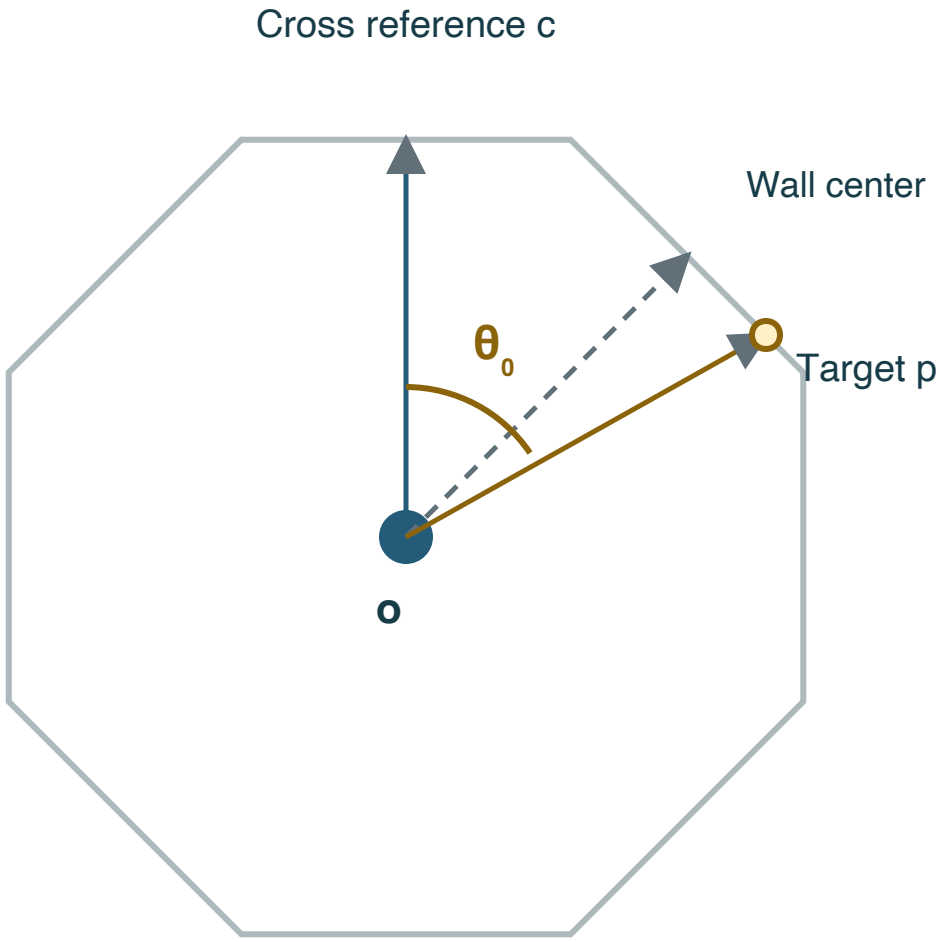

Allocation category

0°, 45°, 90°, 135°, or 180°
Eight trials per category per block
Uses nominal wall relationship

Exact starting bearing

Saved origin □ cross versus target
Horizontal projection; signed angle
Pre-cue snapshot is still required

An octagon and target are schematic; this is not a recorded layout.