

SYSTEMS ENGINEERING AND PROTOTYPING

DESIGN AND IMPLEMENTATION OF A LINE FOLLOWING AND OBSTACLE AVOIDANCE ROBOT

A COURSE WORK PROJECT FOR SUMMER SEMESTER 2025:

**A PREREQUISITE FOR COMPLETION OF PROTOTYPING AND SYSTEMS
ENGINEERING COURSE AT THE UNIVERSITY OF APPLIED SCIENCES, HAMM-
LIPPSTADT**

PRESENTED TO:

**PROFESSOR STEFAN HENKLER
DR. FAEZEH PASANDIDEH
MR. GIDO WAHRMANN**

BY:

GROUP B TEAM 4

CHIMEZIE, DANIEL CHIDI / MAT.NR. 1230515 /
DANIEL-CHIDI.CHIMEZIE@STUD.HSHL.DE

CHO, BERTRAND MUNGU / MAT.NR. 2220052 /
BERTRAND-MUNGU.CHO@STUD.HSHL.DE

GHIMIRE, RIWAJ / MAT.NR. 1232171 /
RIWAJ.GHIMIRE@STUD.HSHL.DE

JULY 8, 2025

1.0 EXECUTIVE SUMMARY

The rapid advancement of automation and embedded systems have paved the way for the development of intelligent robotic systems that can perform tasks with minimal human intervention. This project focuses on designing and implementing an autonomous robotic vehicle that can follow a defined path and avoid obstacles using a combination of infrared (IR), ultrasonic and color sensors. The goal is to develop a functional prototype that simulates intelligent pathfinding and decision-making mechanisms suitable for real-world environments such as automated delivery systems or industrial navigation.

The robotic system is equipped with IR sensors to detect black lines on a contrasting surface, enabling it to follow a designated route. Ultrasonic sensors serve as proximity detectors, allowing the robot to recognize and react to obstacles within its path. A color sensor is also integrated to enhance decision-making by identifying the color characteristics of encountered objects. Based on predefined color criteria, the robot can classify objects such as 'Color A' and 'Color B', influencing its navigation behavior accordingly.

A key highlight of the system is its modularity and low cost. The robot is built on a simple three-wheel chassis and powered by an Arduino Uno R4 WiFi microcontroller. Peripheral components, including an L298N motor driver, a 12 V LiPo battery, and a power switch, provide essential control and energy management. This architecture supports expandability and makes the robot suitable for educational and research-oriented applications.

The software architecture is implemented using the Arduino IDE in embedded C++, with a focus on real-time performance. The line-following algorithm relies on digital feedback from the IR sensors, while obstacle avoidance is triggered by distance thresholds defined for the ultrasonic sensor. When an obstacle is detected, the robot either pauses or takes a detour, depending on the color of the object. For example, if the color sensor identifies a specific hue within a known RGB ratio range (Color A or B), the robot modifies its path accordingly, by either rerouting, stopping or re-centering on the line after bypassing the obstacle.

The development process was iterative, involving extensive hardware calibration and software testing under different lighting and surface conditions. The IR sensors were tuned for high contrast detection, and ultrasonic sensor readings were smoothed to minimize false positives. Color detection was verified using known samples to ensure consistent classification accuracy.

The robot we developed reliably demonstrates autonomous line-following behavior, detects and avoids obstacles within a 25 cm range, and reacts differently based on object color. This project serves as a practical proof-of-concept for sensor integration and autonomous decision-making in embedded systems, laying the foundation for more advanced robotics projects in the future.

2.0 PROJECT OBJECTIVES AND SCOPE

2.1 Objective:

The primary objective of this project is to design and develop an autonomous robotic vehicle capable of navigating dynamic environments using a sensor driven control system.

The following key goals guide the design and implementation phases:

- a) **Autonomous Lane Following:** Develop a reliable lane-following mechanism using Infrared (IR) sensors. The system should be capable of detecting and tracking pre-defined lanes with precision, including handling curves and intersections effectively.
- b) **Obstacle Detection and Avoidance:** Integrate ultrasonic sensors to facilitate real-time obstacle detection. The robotic vehicle should be able to measure distance to nearby objects and initiate avoidance manoeuvres autonomously to prevent collisions.
- c) **Colour-Based Decision Making:** Implement a colour recognition system to classify and respond to different types of obstacles. For example, red objects may signal a full stop, while green may indicate a clear path or require an alternate route. This enables dynamic and context-aware navigation.
- d) **Modular and Power-Efficient Design:** Design the hardware to be modular, allowing easy replacement and testing of individual components. Power efficiency will be emphasized to prolong operational time, utilizing optimized power management strategies across all modules.

2.2 Project scope:

This project encompasses both hardware and embedded software development, with a strong emphasis on reliability, sensor fusion, and system integration. Key aspects of the scope include:


- a) **Hardware Integration and Mechanical Design:** Selection, configuration and interfacing of sensors (IR, Colour and ultrasonic), motor drivers, microcontrollers, and power supply units. Custom mechanical components such as sensor holders, battery enclosures, and structural frames were designed using SolidWorks. This CAD-based approach allowed for accurate measurements, modularity, and efficient assembly of all physical parts.
 - b) **Software Development:** Development of embedded firmware to process sensor data, control actuators, and execute decision-making algorithms. Emphasis will be placed on efficient code structure, interrupt-driven design and real-time responsiveness.
 - c) **System Testing and Validation:** Rigorous testing will be conducted to evaluate the system's performance under different environmental conditions. This includes assessing the accuracy of lane-following, obstacle detection range, decision logic correctness, and overall system robustness.
 - d) **Scalability and Extensibility:** While the initial prototype will demonstrate core functionalities, the system will be designed with future enhancements in mind, including potential wireless communication, machine learning integration, or advanced navigation algorithms.
- In summary, this project aims to deliver a functional, intelligent robotic vehicle by effectively integrating sensing, decision-making, mechanical design, and control into a unified, modular, and energy-efficient system.

3.0 PROJECT METHODOLOGY

The primary objective of this project is to design and develop an autonomous robotic vehicle capable of navigating dynamic environments using a sensor-driven control system.




The following key goals guide the design and implementation phases:

- a) **Autonomous Lane Following:** To develop a reliable lane-following mechanism using Infrared (IR) sensors. The system should be capable of detecting and tracking pre-defined lanes with precision, including handling curves and intersections effectively.
- b) **Obstacle Detection and Avoidance:** To integrate ultrasonic sensors to facilitate real-time obstacle detection. The robotic vehicle should be able to measure distance to nearby objects and initiate avoidance manoeuvres autonomously to prevent collisions.
- c) **Colour-Based Decision Making:** To implement a colour recognition system to classify and respond to different types of obstacles. For example, red objects may signal a full stop, while green may indicate a clear path or require an alternate route. This enables dynamic and context-aware navigation.
- d) **Modular and Power-Efficient Design:** Design the hardware to be modular, allowing easy replacement and testing of individual components. Power efficiency will be emphasized to prolong operational time, utilizing optimized power management strategies across all modules.


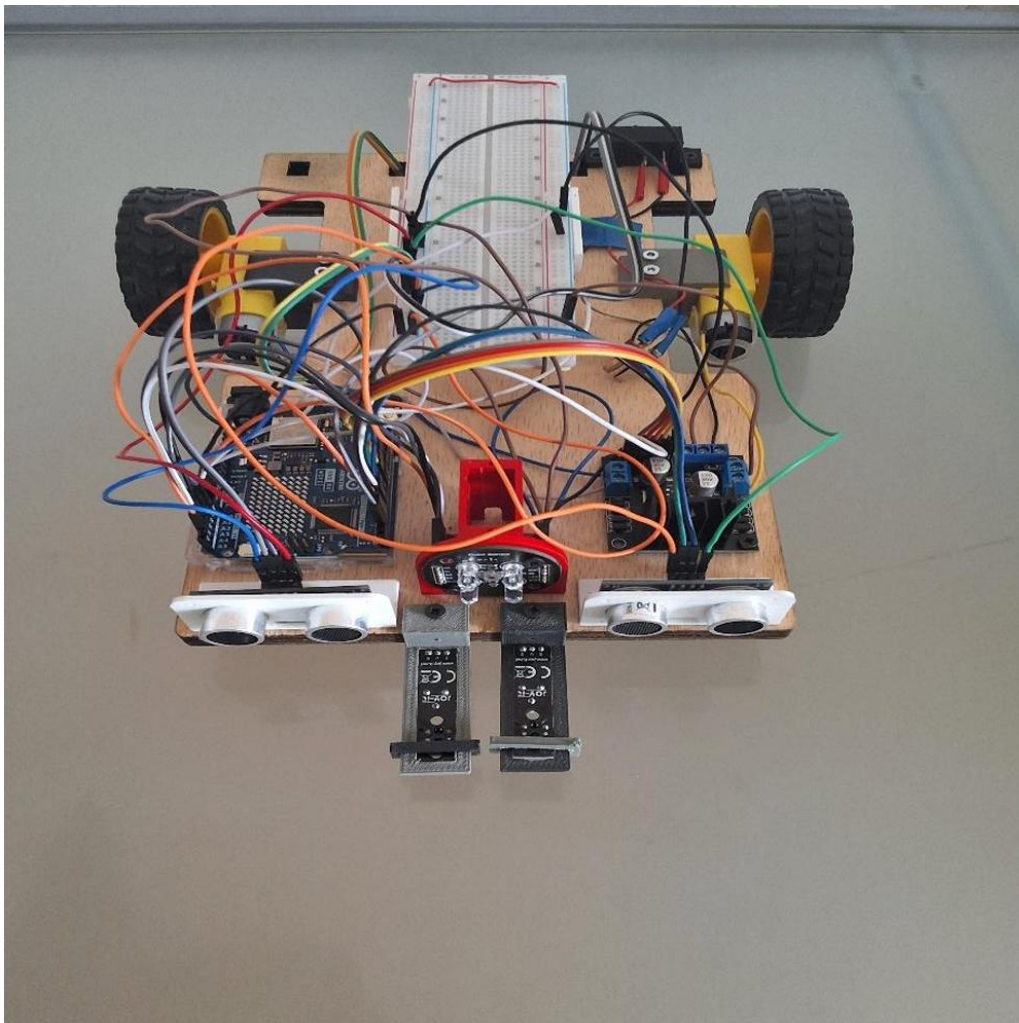


3.1 Mechanical Designs:

CAD Designs of spare parts using SolidWorks Software

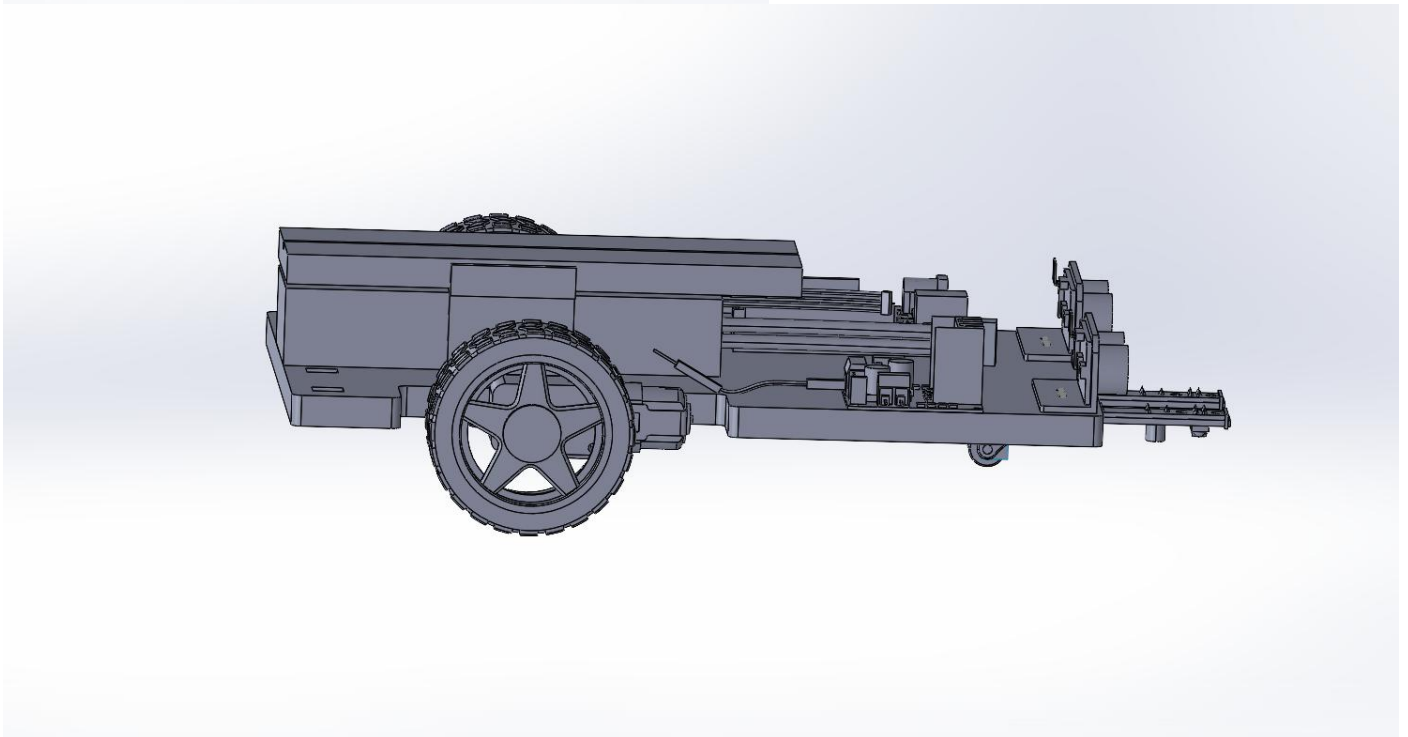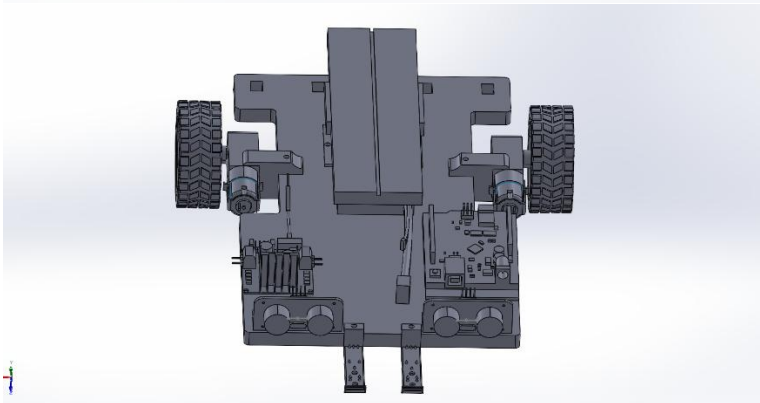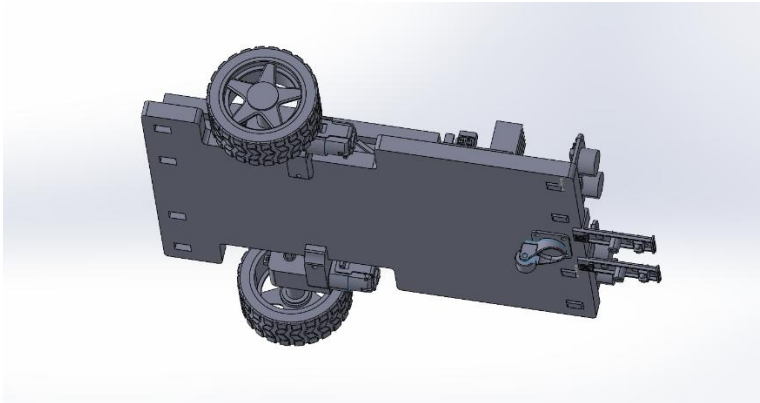


3.2 Electrical Schematics and Arrangements:

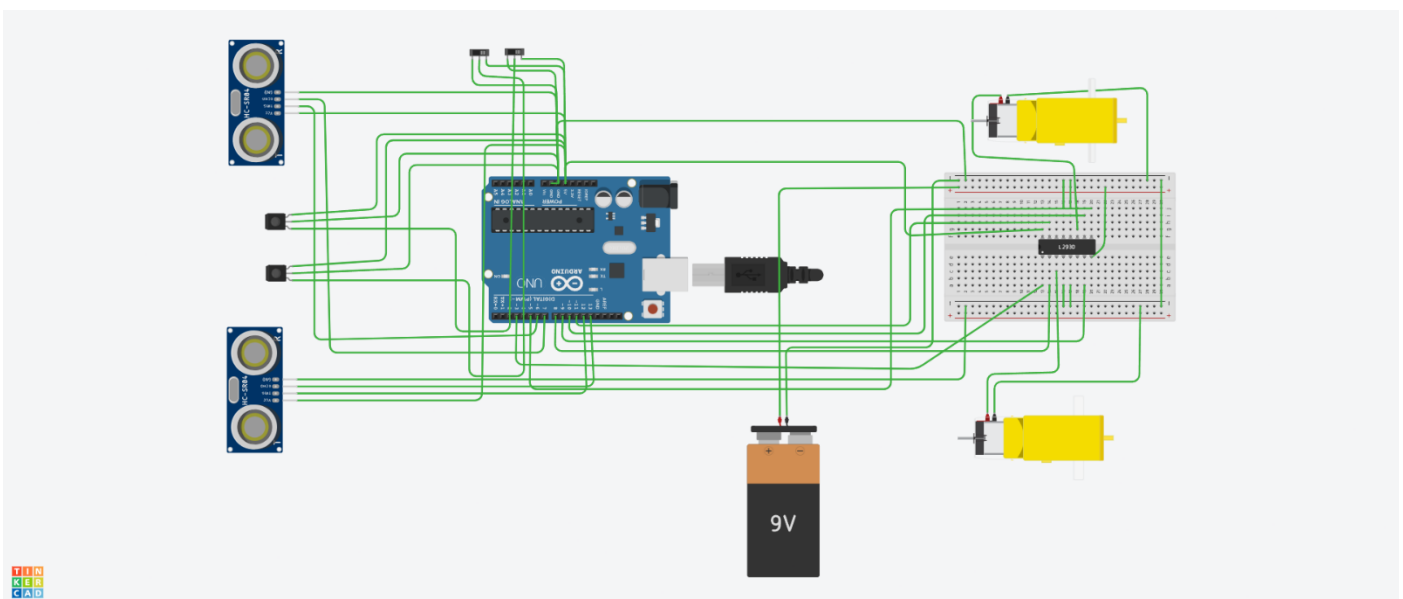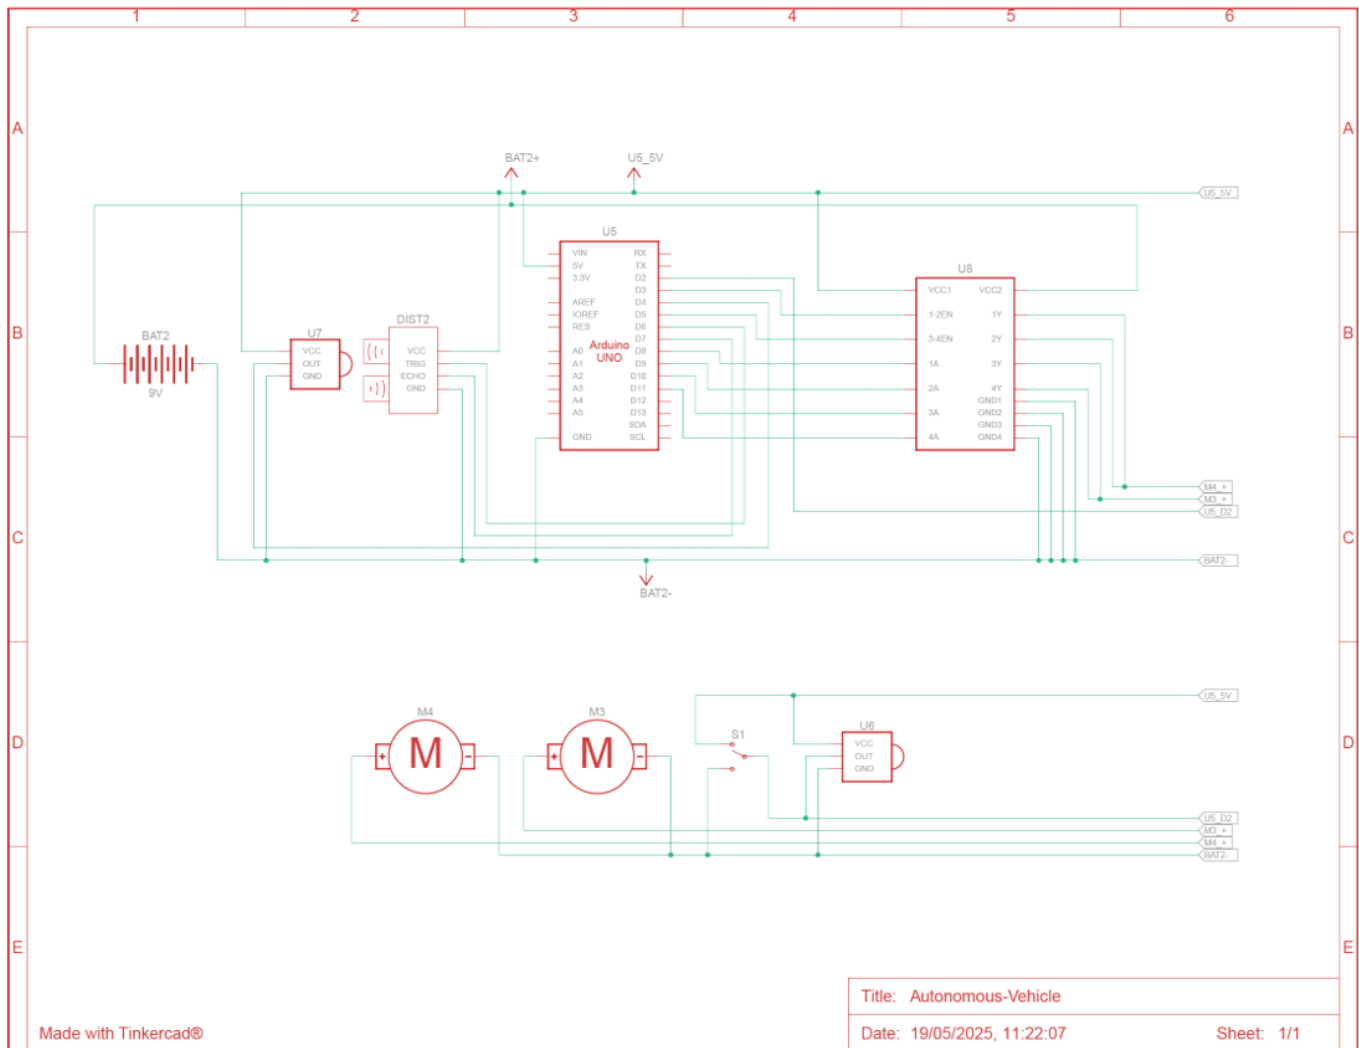


3.3 System Engineering Architecture


3.3.1 Block Definition Diagram:

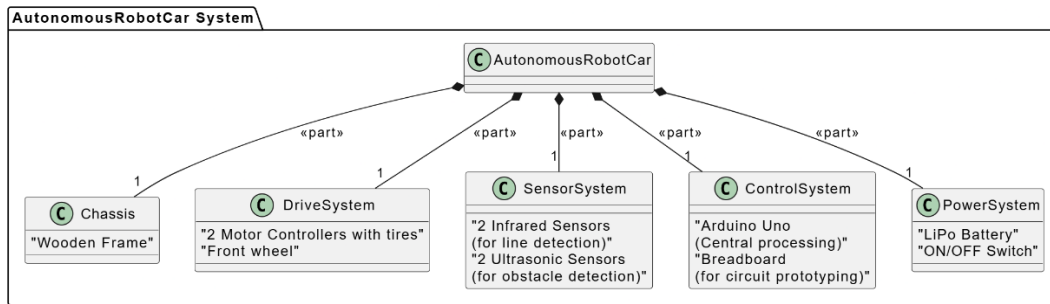


3.3.2 Parametric_Diagram:

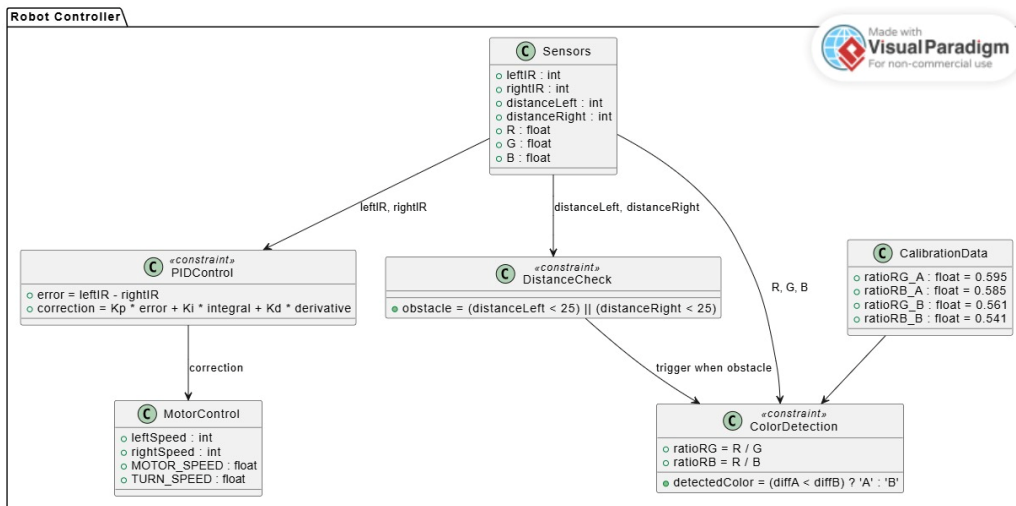


3.3.3 Requirements Diagram

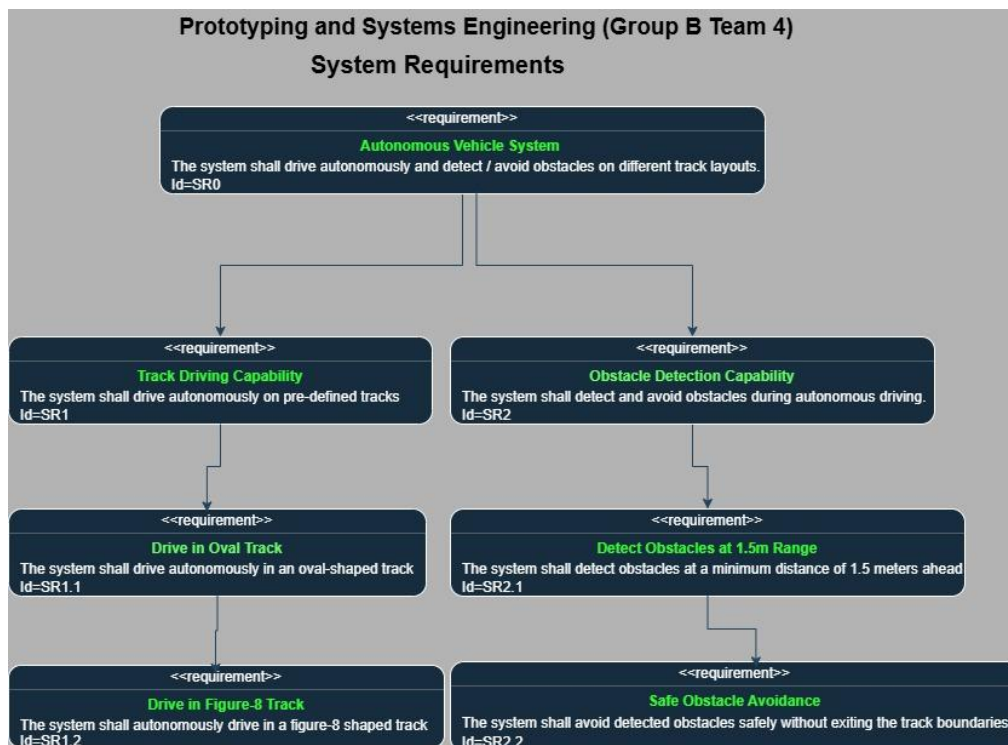

3.3.4 Sequence Diagram:

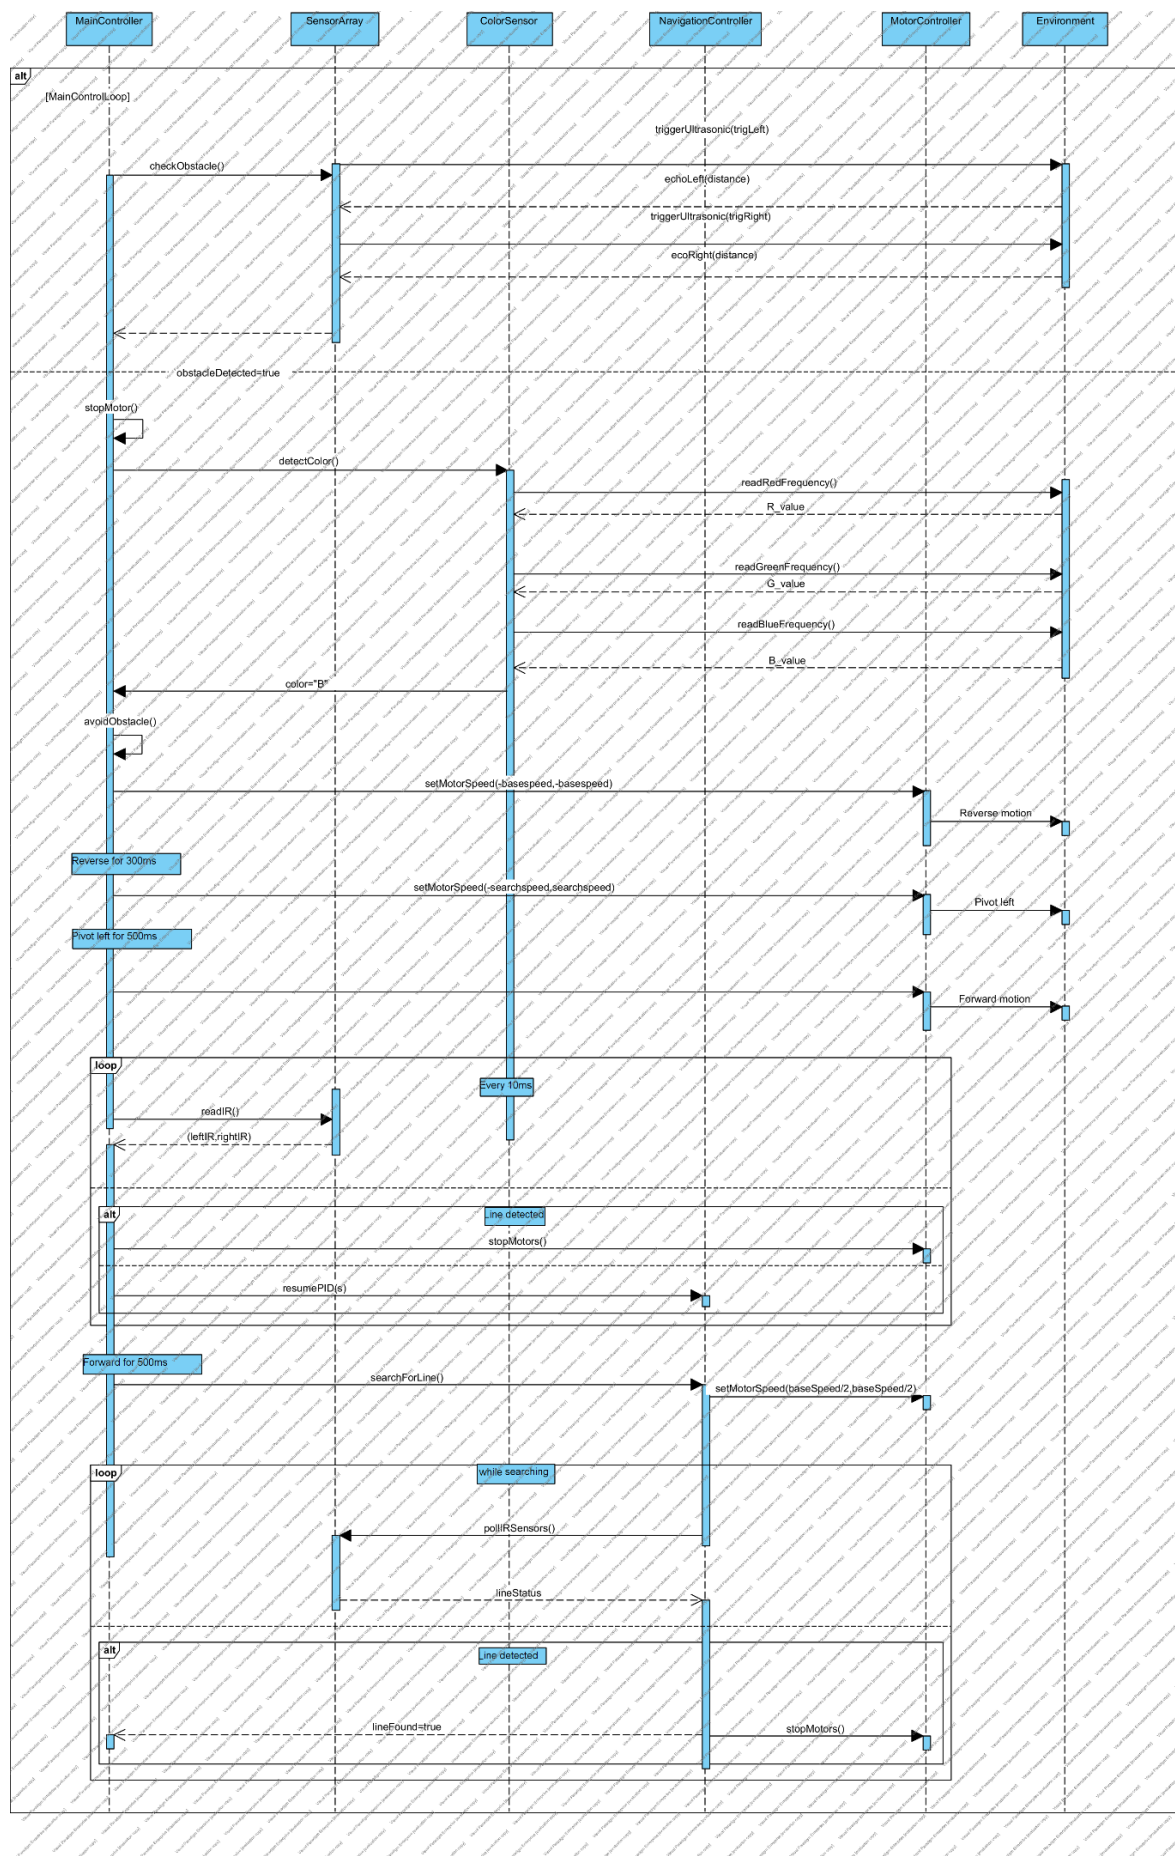


3.3.5 State Machine Diagram:

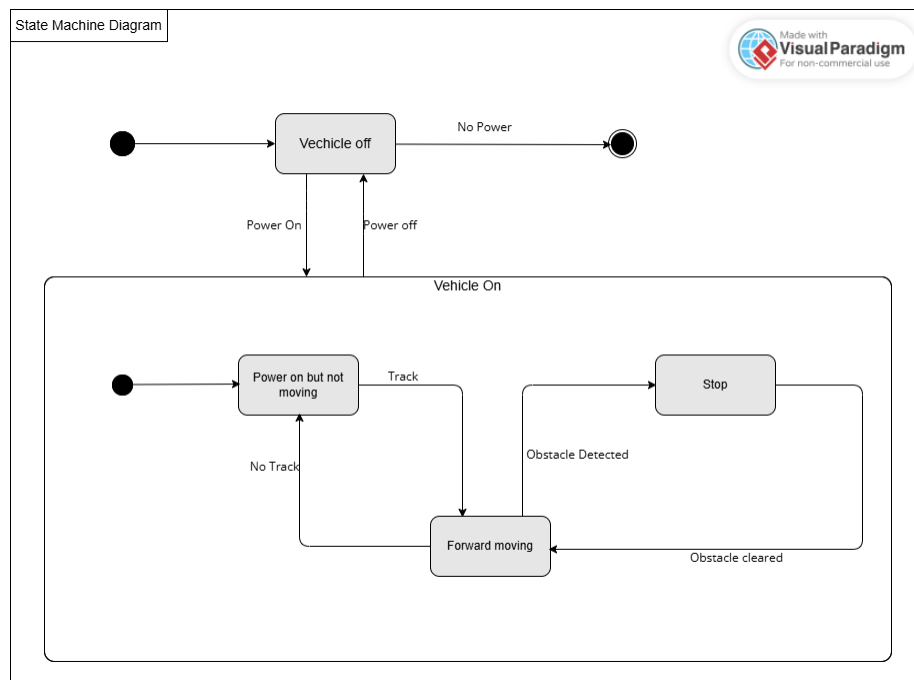

3.3.6 Use Case Diagram

uc [Use Case Diagram]

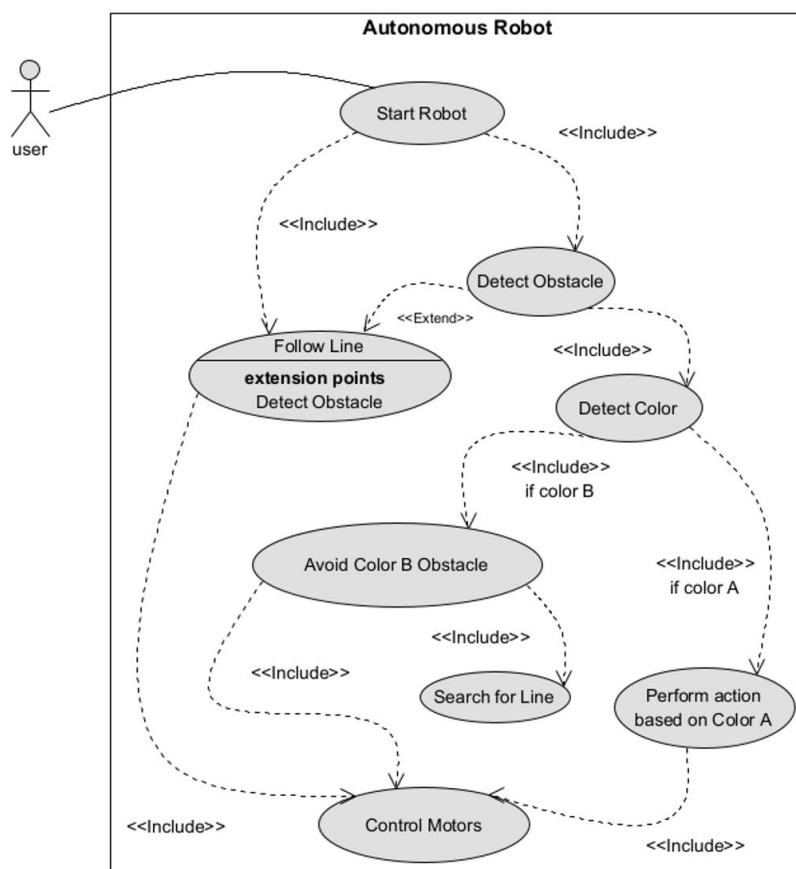

4.0 PROGRESS SUMMARY

The project successfully reached completion after progressing through several structured development stages:

a) **Mechanical Design:**

The project began with systems engineering training and receipt of the project requirement from the professor. Thereafter, the mechanical parts were received in the lab. Custom holders for sensors and the battery were designed by us using SolidWorks and fabricated using a 3D printer. These additional parts provided a stable and modular foundation for effective assembly and efficient performance of our vehicle.

b) **Component Integration:**

Once the frame and holders were ready, each electronic component was tested individually. The IR sensors, ultrasonic sensors, TCS3200 colour sensor, motor driver (SBC Motor Driver 2), and 12V LiPo battery were all verified for functionality before being integrated into the autonomous vehicle system.

c) **Core Functionality Development:**

With hardware in place, development moved to software. The robot was programmed to follow a predefined lane using IR sensors, followed by ultrasonic-based obstacle detection within a 25 cm range. The TCS3200 colour sensor was calibrated to distinguish between obstacle types (Colour A and Colour B), enabling the robot to take appropriate actions based on object colour.

d) **Advanced Behaviour Implementation:**

The robot was enhanced with advanced obstacle avoidance manoeuvres. It can now bypass obstacles autonomously and return to the original lane without external assistance. PID control logic was used to ensure smooth lane following and stable turning behaviour.

e) **Testing, Challenges, and Finalization:**

The system was tested extensively under different lighting and surface conditions. The main challenges included colour sensor calibration in varied lighting and PID tuning for smooth motion. These were overcome through iterative testing and adjustments. All planned objectives were achieved.

f) **Final Status:**

The robotic vehicle demonstrates all core capabilities lane following, real-time obstacle avoidance, colour-based decision making, and autonomous path correction. The final system is stable, efficient, and ready for deployment.

5.0 FINDINGS AND ANALYSIS

Findings and Analysis:

The following section presents the key findings obtained during the project, along with a detailed analysis. These results are based on the data collected, observations made, and methods applied throughout the project.

5.1 Sensor Behavior and Accuracy:

- a) Ultrasonic Sensors: Successfully detected obstacles within a range of 18cm with an average error margin of ± 1 cm.
- b) Infrared Sensors: Accurately detected line paths, but performance was affected by lighting and surface texture.
- c) Colour Sensor: Could reliably distinguish between Red and Green surfaces under good lighting conditions.

5.2 PID Controller Tuning:

- a) Initial PID values: $K_p = 100$, $K_i = 100$, $K_d = 100$
- b) Observed that:
 - i. High K_p caused the robot to oscillate.
 - ii. K_i helped reduce long term drift but too much made it unstable.
 - iii. K_d improved sharp turns and reduced overshoot.
- c) Final tuned values: $K_p = 10$, $K_i = 5$, $K_d = 10$ provided smooth line following with minimal overshooting.

5.3 State Machine Performance:

- a) The state transitions worked correctly between:
 - i. Line following
 - ii. Obstacle avoidance
 - iii. Turning logic
- b) Edge cases (obstacles, tight corners) were handled with a delay of 200ms on average.

5.4 System Limitations:

- a) Sensor noise occasionally caused false obstacle detection.
- b) Bright ambient light interfered with IR accuracy.
- c) Tuning PID required trial and error and was environment dependent.

5.5 Performance Metrics:

- a) Average lap time on test track: 29 seconds
- b) Success rate for completing track without collision

6.0 KEY LEARNINGS AND TAKEAWAYS

Key Learnings and Takeaways

Working on the autonomous vehicle gave us valuable insight into how complex it can be to design a functional system in real life. Some of the major takeaways we had include;

6.1 Understanding Autonomous Systems:

- a) Gained practical insight into how autonomous vehicles perceive their environment using sensors like ultrasonic, Infrared and color sensors.
- b) Learned how decision making is handled through state machines and sensor inputs.

6.2 Sensor Integration Challenges:

- a) Realized that real world sensor data is noisy and can be affected by environmental conditions (e.g., lighting, surface reflectivity).

6.3 PID Control in Real Life:

- a) Learned how a PID controller is used to achieve smooth line following.
- b) Understood the role of tuning k_p , k_i and k_d for optimal movement balancing responsiveness and stability.

6.4 System Thinking:

- a) Understood the importance of combining hardware, software and control logic into a cohesive system.
- b) Experienced how small issues in one component (e.g., a sensor) can impact overall system behavior.

6.5 Programming and Logic Development:

- a) Improved skills in C/C++ programming using Arduino IDE.
- b) Learned to design modular code with functions, state machines and helper routines.
- c) Developed debugging skills by using serial output for troubleshooting sensor behavior.

6.6 Project Planning and Iteration:

- a) Learned the value of testing in stages. Firstly, the motors were tested, then sensors and other components before the integration of the system.
- b) Iteratively refined the system through testing, debugging and improvements.

7.0 SIGNIFICANT CHALLENGES AND RESOLUTIONS

Throughout the development and testing of the autonomous vehicle, several technical and practical challenges were encountered. These challenges provided valuable learning opportunities and required iterative problem-solving, adjustments to the hardware and software, and fine-tuning of system performance. Below is a summary of the key challenges faced during the project and the solutions implemented to overcome them.

7.1 Sensor Inaccuracy and Interference:

- a) **Challenge:** The IR and ultrasonic sensors sometimes gave inconsistent or false readings, especially in bright lighting or when objects were at awkward angles.
- b) **Resolution:** Implemented multiple readings and averaging (for color sensor), timing intervals for ultrasonic checks and added logic to ignore clearly invalid values.

7.2 Obstacle Avoidance Complexity:

- a) **Challenge:** Designing an effective obstacle avoidance routine that didn't cause the robot to get lost or stuck after detouring.
- b) **Resolution:** Created a step-by-step avoidance sequence including reverse, pivot, bypass, and line recovery with fail-safe search patterns -ensured the robot could return to the line reliably.

7.3 Line Loss and Path Recovery:

- a) **Challenge:** When both IR sensors lost the line (e.g., at junctions or sharp curves), the robot didn't always know which way to turn.
- b) **Resolution:** Tracked the last seen position of the line using lastSeenLine logic and implemented directional searches (pivot left/right) to regain the path.

7.4 Color Detection Reliability:

- a) **Challenge:** Colours were sometimes misclassified due to ambient lighting or variations in surface tone.
- b) **Resolution:** Collected calibrated colour ratios (RG and RB) and added a differential comparison strategy instead of relying on raw RGB values - improved classification accuracy between Colour A and B.

7.5 Tuning PID Controller:

- a) **Challenge:** The robot either over-corrected or didn't respond well to line deviations during movement.
- b) **Resolution:** Tuned the PID constants (Kp, Ki, Kd) through trial and error to achieve smoother turns and better line-following stability.

7.6 Code Integration and Timing Conflicts:

- a) **Challenge:** Running multiple sensor routines (IR, ultrasonic, colour) caused timing conflicts and delayed responses.
- b) **Resolution:** Used timing intervals (millis) instead of delay() for obstacle checks and optimized sensor polling frequency to balance responsiveness and stability.

8.0 BUDGET AND FINANCES

Budget and Finances

While working on the project, we realized that extensive testing on the autonomous vehicle was necessary to achieve optimal results. To facilitate this, we purchased a few additional items to support our efforts.

Below is a list of the items we acquired:

Cardboards and coloured tapes

Due to limited lab time for testing, we bought cardboards and coloured tapes to create a temporary track at home. This allowed us to conduct more extensive testing of the autonomous vehicle.

9V Battery

Since students were not allowed to take the 12V LiPo battery home due to the risk of explosion, we purchased a 9V battery to power the autonomous vehicle during home testing.

3*25mm Screws

The mounts we designed for the DC motors required 3×25mm screws, which were not available in the lab. We therefore bought the screws specifically for this purpose

HSHL Group B Team 4 Expense Report (For Team Project Only)

General Information

Purpose: To invest more time in practicing at home before final competition

Date	Description	Quantity	Unit Price	Amount	Total
25/05/2025	9V Battery	1	3€	3€	3€
	White Cardboard	2	1€	2€	2€
	Coloured Tape Pack	1	3,29€	3,29€	3,29€
	3*25mm Screw Pack	1	4,59€	4,59€	4,59€
Total					12,88€
					12,88€

9.0 TIMELINE AND SCHEDULE

This is a very compact schedule stated below. The comprehensive detail is expressed better in the attached excel spreadsheet in GitHub.

Project Planner for Prototyping and Systems Engineering.

Project Contributors:

Chimezie, Daniel Chidi (Mat. Nr. 1230515) - Member / Coordinator

Ghimire,Riwaj (Mat. Nr. 1232171) - Member

Professor Stefan Henkler / Gido Wahrmann / Faezeh Pasandideh

Display week: 1,00

[MM/DD/YYYY]



Project supervision and directions: Professor Stefan Henkler / Gido Wahrmann / Faezeh Pasandideh					Apr 7, 2025							Apr 14, 2025							Apr 21, 2025							Apr 28, 2025							Mai 5, 2025							Mai 12, 2025							Mai 19, 2025							Mai 26, 2025						
					7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	1
TASK	ASSIGNED TO	SUPPORTED BY	PROGRESS	START	END																																																							
Project Initialization and Planning																																																												
Project goals and scope definition	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	4.8.25	4.9.25																																																							
Research similar systems	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	4.9.25	4.11.25																																																							
Define system requirements (hardware/software)	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	4.11.25	4.13.25																																																							
Budget and resource planning	Cho, Bertrand M.	Ghimire Riway / Chimezie Daniel C.	100%	4.13.25	4.14.25																																																							
Risk assessment	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	4.14.25	4.15.25																																																							
System Design																																																												
Block diagram/system architecture	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	4.15.25	4.20.25																																																							
Sensor and actuator selection	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	4.15.25	4.16.25																																																							
Circuit schematic design	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	4.15.25	4.17.25																																																							
Mechanical chassis design	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	4.15.25	4.20.25																																																							
Power supply holder design	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	4.15.25	4.17.25																																																							
Pin mapping for Arduino Uno R4	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	4.15.25	4.17.25																																																							
Hardware Procurement and Assembly																																																												
Order and replacement for components (Arduino Uno R4, sensors, motors)	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	4.22.25	4.22.25																																																							
Assemble the chassis	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	4.22.25	4.22.25																																																							
Mount motors and wheels	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	4.22.25	4.22.25																																																							
Connect sensors (IR, Ultrasonic, Colour.)	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	4.22.25	4.22.25																																																							
Connect motor drivers and power modules	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	4.22.25	4.22.25																																																							
Wiring and cable management	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	4.22.25	4.28.25																																																							
Software Development																																																												
Arduino IDE setup	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	4.29.25	4.29.25																																																							
Write/test modules:	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	4.29.25	5.4.25																																																							
>> Line-following using IR sensors	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	4.29.25	5.2.25																																																							
>> Obstacle avoidance using ultrasonic sensor	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	4.29.25	5.2.25																																																							
>> Motor control (PWM, direction)	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	4.29.25	5.2.25																																																							
>> Colour detection	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	4.29.25	5.4.25																																																							
Integrate modules into main control loop	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	4.29.25	5.4.25																																																							
PID and Logic tuning for line-following	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	4.29.25	5.4.25																																																							
Fall-safe and debugging (routine process)	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	4.29.25	6.24.25																																																							
Integration and Testing																																																												
Combine hardware and software	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	5.6.25	5.6.25																																																							
Functional testing of all subsystems	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	5.6.25	5.6.25																																																							
Field tests:	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	5.6.25	5.6.25																																																							
>> Line-following accuracy	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	5.6.25	5.29.25																																																							
>>Obstacle detection responsiveness	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	5.6.25	5.26.25																																																							
>>Route completion success rate	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	5.6.25	6.15.25																																																							
Debugging and iteration (routine process)	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	5.6.25	6.23.25																																																							
Power efficiency testing	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	5.6.25	5.11.25																																																							
Documentation																																																												
Wiring diagrams and circuit explanations	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	5.13.25	5.13.25																																																							
Code documentation (comments, flowcharts)	Ghimire Riway	Cho, Bertrand M. / Chimezie Daniel C.	100%	5.13.25	5.16.25																																																							
Test results and data logs	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	5.6.25	6.24.25																																																							
User manual or usage instructions	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	5.6.25	6.5.25																																																							
Final report	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	5.13.25	7.7.25																																																							
Presentation and Delivery																																																												
Prepare demo video or live demo (Competition Day) * 1st position for Group A and B Contest ^{1st}	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	6.24.25	6.24.25																																																							
Slides and presentation materials	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	6.24.25	6.24.25																																																							
Q&A preparation for inputs and future advances	Cho, Bertrand M.	Chimezie, Daniel C./Ghimire Riway	100%	6.24.25	6.24.25																																																							
Final handover of project	Chimezie, Daniel C.	Cho, Bertrand M. / Ghimire Riway	100%	7.7.25	7.9.25																																																							

10. RECOMMENDATIONS AND NEXT STEPS

The autonomous vehicle project has successfully met its core objectives, including reliable lane following, obstacle avoidance, and colour-based decision making. To further enhance the system's robustness, scalability, and practical applicability, the following recommendations and next steps are proposed:

a) **Improve Sensor Fusion:**


Integrate data from multiple sensors (e.g., IR, ultrasonic, and camera modules) using sensor fusion techniques to enhance accuracy in complex environments.

b) **Add Camera-Based Vision:**

Introduce a camera module with basic computer vision algorithms (e.g., OpenCV) to recognize traffic signs, lane markings, and dynamic obstacles beyond the capability of IR or color sensors.

c) **Enhance Navigation Algorithms:**

Implement advanced algorithms such as A* or Dijkstra for path planning, and Kalman Filter for better localization and control under uncertain conditions.

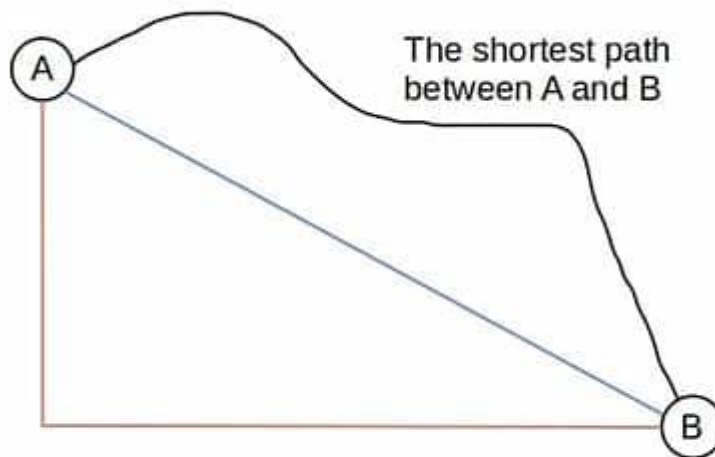

The **Euclidean** and **Manhattan** distances estimate the shortest path's actual length.

d) **Develop a Scalable Software Architecture:**

Refactor the current code into modular blocks to support future upgrades, debugging, and potential collaboration with other developers.

e) **Test in Real-World Scenarios:**

Move beyond lab conditions and test the vehicle on larger, more dynamic tracks with real-world variations in lighting, surfaces, and obstacle types.

f) **Add Remote Monitoring:**

Incorporate wireless communication (e.g., Bluetooth or Wi-Fi) for remote monitoring, telemetry, and control, allowing real-time feedback and data collection during operation.

1. **Energy Optimization:**

Analyse battery usage and optimize motor control and sensor usage to extend operating time and improve energy efficiency.

11. TEAM PERFORMANCE

We worked extremely very hard and also, invested much time in testing and re-testing to ensure that our modest design meets the core aim of the project which is:

The ability of our designed robot to do the following with success:

- a) To follow a dark lane and travel through an oval part.
- b) To sense and detect an obstacle and follow our desired instructions in Arduino IDE coding.
- c) To avoid obstacles it sensed and return back to the lane and continue its travel via the assigned tracks.

For Group A and Group B Teams racing and obstacle avoidance context, we won the contest with records of **less than 29 seconds** travel time across the oval.

Future trajectory:

We aim to investigate further into robotics by applying the skills acquired in this course and project in designing a car with similar capabilities which would integrate other capabilities such as artificial intelligence and real life camera sensing devices.

We recommend this course for any Electrical and Electronic Engineering student or any human who is innovative minded. There should be no single limits if we push very hard with unwavering efforts.



12. RISKS AND MITIGATION

Risk	Description	Mitigation Strategy
Sensor Malfunction or Inaccuracy	Inconsistent readings due to lighting, surface reflectivity, or hardware issues	<ul style="list-style-type: none">a) Regular calibration under varying conditions.b) Use redundant sensors or sensor fusion.c) Implement error-handling in code.
Power Supply Issues	Battery drain or voltage drops causing system failure	<ul style="list-style-type: none">a) Monitor battery voltage in real time.b) Optimize power usage in code - Keep spare batteries on hand.
Software Bugs and Instability	Unexpected behaviour due to bugs or incomplete testing	<ul style="list-style-type: none">a) Modular programming with good documentation.b) Conduct unit and integration tests.c) Use version control.
Hardware Damage	Mechanical failure or wear and tear from testing	<ul style="list-style-type: none">a) Use durable materials and proper mounting.b) Regular physical inspection.c) Keep spare parts available.
Environmental Variability	Performance drops in outdoor or non-lab settings	<ul style="list-style-type: none">a) Test in diverse environments early.b) Use adaptive thresholds and calibration techniques.
Team Coordination and Time Constraints	Delays from poor communication or uneven workload	<ul style="list-style-type: none">a) Hold regular team meetings.b) Use project management tools (e.g., Trello, GitHub, MS-PM).c) Allocate buffer time for issues.

13. APPENDICES

All supporting documents including technical specifications, tables, charts, and detailed data


Appendix A: Technical Specifications

Component	Specification
IR Sensors	Digital reflectance sensors, 3–5V, 20–30 cm range
Ultrasonic Sensor	HC-SR04, 2–400 cm range, 5V operating voltage
Color Sensor	TCS3200, RGB color detection, 3–5V input
Motor Driver	SBC Motor Driver 2, dual channel, 5–30V DC
Power Source	12V LiPo Battery, 2200 mAh
Microcontroller	Arduino Uno R4 WiFi (ATmega328P)
Chassis Material	Acrylic frame with 3D-printed sensor holders
Wheels and Motors	DC geared motors, 100 RPM, plastic wheels

Appendix B: PID Control Parameters

Parameter	Value
P (Proportional)	1.2
I (Integral)	0.4
D (Derivative)	0.05

Appendix C: System Block Diagram

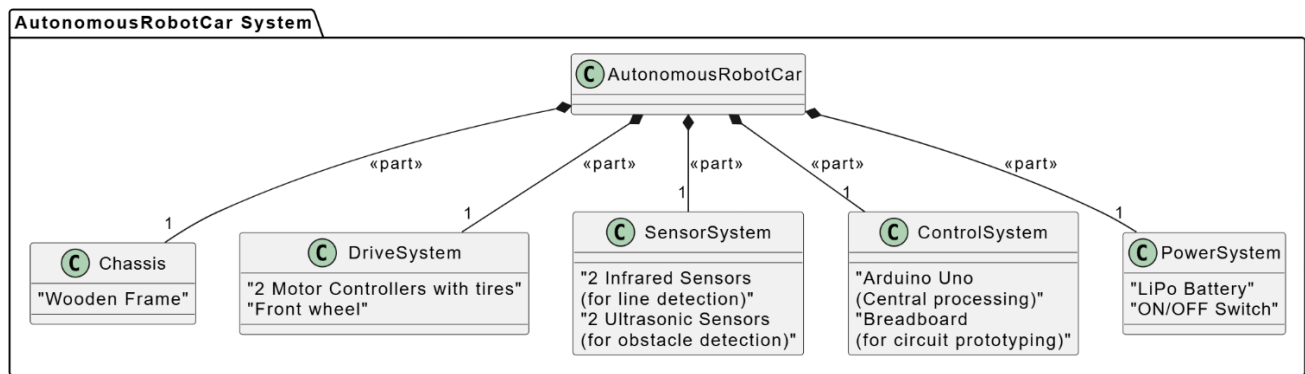

Appendix D: Test Results Summary

Test Scenario	Outcome	Notes
Lane following on white background	Successful	Minor tuning required for sharp turns
Obstacle avoidance at 25 cm	Successful	Smooth detour and return to lane
Color detection under indoor light	Reliable (Color A & B detected)	Requires recalibration under sunlight
Battery endurance test	2.5 hours of operation	Under typical use with full charge

Appendix E: Source Code Snapshots

CodeBlame452 lines (373 loc) · 11 KB

```
1 // === Motor control pins ===
2 const int enA = 3; // PWM
3 const int in1 = 8;
4 const int in2 = 9;
5 const int enB = 5; // PWM
6 const int in3 = 10;
7 const int in4 = 11;
8
9 // === IR sensors ===
10 const int irLeft = 2;
11 const int irRight = 4;
12
13 // === Ultrasonic front-left and front-right sensors ===
14 const int trigLeft = 6;
15 const int echoLeft = 7;
16 const int trigRight = 12;
17 const int echoRight = 13;
18
19 // === Color sensor pins ===
20 const int S0 = A0;
21 const int S1 = A1;
22 const int S2 = A2;
23 const int S3 = A3;
24 const int sensorOut = A4;
25
26 // === Motor speed settings ===
27 const float MOTOR_SPEED = 100;
28 const float TURN_SPEED = 60;
```

CodeBlame452 lines (373 loc) · 11 KB

```
29 // === PID constants ===
30 float Kp = 10.0;
31 float Ki = 0.0;
32 float Kd = 10.0;
33 float previousError = 0;
34 float integral = 0;
35
36 // === Obstacle detection state ===
37 unsigned long lastObstacleCheck = 0;
38 const unsigned long obstacleCheckInterval = 200;
39 bool obstacleDetected = false;
40
41 // === Movement & line states ===
42 enum MovementState { STOP, FORWARD, SEARCH_LEFT, SEARCH_RIGHT };
43 MovementState currentState = STOP;
44
45 enum LastSeen { NONE, LEFT, RIGHT };
46 LastSeen lastSeenLine = NONE;
47
48 // === Color calibration ===
49 struct ColorCalibration {
50   float ratioR;
51   float ratioB;
52 };
53 ColorCalibration colorA = {0.595, 0.585};
54 ColorCalibration colorB = {0.561, 0.541};
55
56 bool colorDetectedForThisObstacle = false;
57 char lastDetectedColor = 'N'; // 'A', 'B', or 'N'
58
59 void setup() {
60   // Motor
61   pinMode(enA, OUTPUT);
62   pinMode(in1, OUTPUT);
63   pinMode(in2, OUTPUT);
64   pinMode(enB, OUTPUT);
65
```

CodeBlame452 lines (373 loc) · 11 KB

```
66   pinMode(enB, OUTPUT);
67   pinMode(in3, OUTPUT);
68   pinMode(in4, OUTPUT);
69
70   // IR
71   pinMode(irLeft, INPUT);
72   pinMode(irRight, INPUT);
73
74   // Ultrasonic
75   pinMode(trigLeft, OUTPUT);
76   pinMode(echoLeft, INPUT);
77   pinMode(trigRight, OUTPUT);
78   pinMode(echoRight, INPUT);
79
80   // Color sensor
81   pinMode(S0, OUTPUT);
82   pinMode(S1, OUTPUT);
83   pinMode(S2, OUTPUT);
84   pinMode(S3, OUTPUT);
85   digitalWrite(S0, HIGH);
86   digitalWrite(S1, LOW);
87
88   Serial.begin(9600);
89   stopMotors();
90
91   void loop() {
92     unsigned long currentMillis = millis();
93
94     // Obstacle detection
95     checkObstacle();
96
97     // IR reading
98     int leftIR = digitalRead(irLeft);
99     int rightIR = digitalRead(irRight);
100
```

CodeBlame452 lines (373 loc) · 11 KB

```
101
102 void setup() {
103   int rightIR = digitalRead(irRight);
104
105   // Track last seen
106   if (leftIR == HIGH && rightIR == LOW) lastSeenLine = LEFT;
107   else if (rightIR == HIGH && leftIR == LOW) lastSeenLine = RIGHT;
108
109   // Determine movement state
110   if (obstacleDetected && lastDetectedColor == 'A') {
111     currentState = STOP;
112   } else if (obstacleDetected && lastDetectedColor == 'B') {
113     currentState = FORWARD;
114   } else if (leftIR == LOW && rightIR == LOW) {
115     if (lastSeenLine == LEFT) currentState = SEARCH_LEFT;
116     else if (lastSeenLine == RIGHT) currentState = SEARCH_RIGHT;
117     else currentState = STOP;
118   } else {
119     currentState = FORWARD;
120   }
121
122   // Act on movement state
123   actOnMovementState(leftIR, rightIR);
124 }
125
126 void actOnMovementState(MovementState state, int leftIR, int rightIR) {
127   switch (state) {
128     case STOP:
129     case SEARCH_LEFT:
130     case SEARCH_RIGHT:
131     case FORWARD: {
132     int error = leftIR - rightIR;
133     float derivative = error - previousError;
134     integral += error;
135     float correction = Kp * error + Ki * integral + Kd * derivative;
136     previousError = error;
137
138     int leftSpeed = constrain(MOTOR_SPEED + correction, 0, 255);
139     int rightSpeed = constrain(MOTOR_SPEED + correction, 0, 255);
140     setMotorSpeed(leftSpeed, rightSpeed);
141     break;
142   }
143
144   case SEARCH_LEFT:
145     setMotorSpeed(-TURN_SPEED, TURN_SPEED);
146     break;
147
148   case SEARCH_RIGHT:
149     setMotorSpeed(TURN_SPEED, -TURN_SPEED);
150     break;
151   }
152 }
153
154 void checkObstacle() {
155   unsigned long currentMillis = millis();
```



Code	Blame	452 lines (373 loc) - 11 KB	Code	Blame	452 lines (373 loc) - 11 KB	Code	Blame	452 lines (373 loc) - 11 KB	Code	Blame	452 lines (373 loc) - 11 KB
353	void checkObstacle() {		387	void avoidObstacle() {		387	void avoidObstacle() {		318	Serial.println(" = sweep right");	
354	unsigned long currentTime = millis();		388	stopMotors();		388	stopObstacle();		319	setMotorSpeed(TURN_SPEED, TURN_SPEED);	
355			389			389			320	delay(500);	
356	if (currentTime - lastObstacleCheck == obstacleCheckInterval) {		390	// Move forward half speed for 300ms with line search		390			321	stopMotors();	
357	int distanceLeft = getDistance(trigPin, echoPin);		391	Serial.println("Moving forward to bypass obstacle...");		391	int leftIR = digitalRead(irLeft);		322		
358	int distanceRight = getDistance(trigPin, echoPin);		392	setMotorSpeed(MOTOR_SPEED / 2, MOTOR_SPEED / 2);		392	int rightIR = digitalRead(irRight);		323		
359	bool obstacleAval = (distanceLeft > 80 distanceLeft < 20)		393	startTime = millis();		393	if (leftIR == HIGH rightIR == HIGH) {		324		
360	(distanceRight > 80 distanceRight < 20);		394	while (millis() - startTime < 300) {		394	stopMotors();		325		
361			395	checkObstacle();		395			326		
362			396			396	currentState = FORWARD;		327		
363	if (obstacleAval && lastObstacleCheck == obstacleCheckInterval) {		397			397	return;		328		
364	stopMotors();		398	int leftIR = digitalRead(irLeft);		398			329		
365	char detected = detectColor();		399	int rightIR = digitalRead(irRight);		399	delay(50);		330		
366	lastDetectedColor = detected;		400	if (leftIR == HIGH rightIR == HIGH) {		400			331		
367	colorDetectedForObstacle = true;		401	stopMotors();		401	stopMotors();		332		
368			402	currentState = FORWARD;		402			333		
369			403			403	checkObstacle();		334		
370	if (detected == 'A') {		404			404			335		
371	Serial.println("Action: STOP for Color A");		405			405			336		
372	currentState = STOP;		406	delay(50);		406			337		
373	return;		407			407			338		
374	} else if (detected == 'B') {		408	stopMotors();		408			339		
375	Serial.println("Action: STOP OBSTACLE for Color B");		409			409			340		
376	avoidObstacle();		410			410			341		
377	} else if (obstacleAval) {		411			411			342		
378	colorDetectedForObstacle = false;		412			412			343		
379	lastDetectedColor = 'N';		413			413			344		
380			414			414			345		
381			415	stopMotors();		415			346		
382	obstacleCheck = detectedColor;		416	checkObstacle();		416			347		
383	lastObstacleCheck = currentTime;		417			417			348		
384	}		418			418			349		
385			419			419			350		
386			420			420			351		
387	void avoidObstacle() {		421			421			352		
388	Serial.println("Avoiding obstacle: Reversing...");		422	}		422			353		
389	setMotorSpeed(-MOTOR_SPEED, -MOTOR_SPEED);		423			423			354		
390			424	int readFrequency(bool s2, bool s3) {		424			355		
391			425	digitalWrite(S2, s2);		425			356		
392			426	digitalWrite(S3, s3);		426			357		
393			427	delay(50);		427			358		
394			428	return pulseIn(sensorOut, LOW);		428			359		
395			429	}		429			360		
396			430			430			361		
397			431	bool searchForLineDuringWindow(unsigned long maxDuration) {		431			362		
398			432	unsigned long startTime = millis();		432			363		
399			433	setMotorSpeed(MOTOR_SPEED / 1.8, MOTOR_SPEED / 1.8);		433			364		
400			434			434			365		
401			435	while (millis() - startTime < maxDuration) {		435			366		
402			436	int leftIR = digitalRead(irLeft);		436			367		
403			437	int rightIR = digitalRead(irRight);		437			368		
404			438			438			369		
405			439	if (leftIR == HIGH rightIR == HIGH) {		439			370		
406			440	stopMotors();		440			371		
407			441			441			372		
408			442	if (leftIR == HIGH && rightIR == LOW) lastSeenLine = LEFT;		442			373		
409			443	else if (rightIR == HIGH && leftIR == LOW) lastSeenLine = RIGHT;		443			374		
410			444			444			375		
411			445	currentState = FORWARD;		445			376		
412			446	return true;		446			377		
413			447	}		447			378		
414			448			448			379		
415			449			449			380		
416			450	stopMotors();		450			381		
417			451	return false;		451			382		
418			452	}		452			383		
419									384		
420									385		
421									386		

Appendix F: 3D-Printed Part Designs


(a) IR Sensor holder




(b) Motor Holder




(c) Ultrasonic Sensor Holder



(d) IR Sensor Clip



(d) Battery and Breadboard holder



14.0 REFERENCES (IEEE Standard)