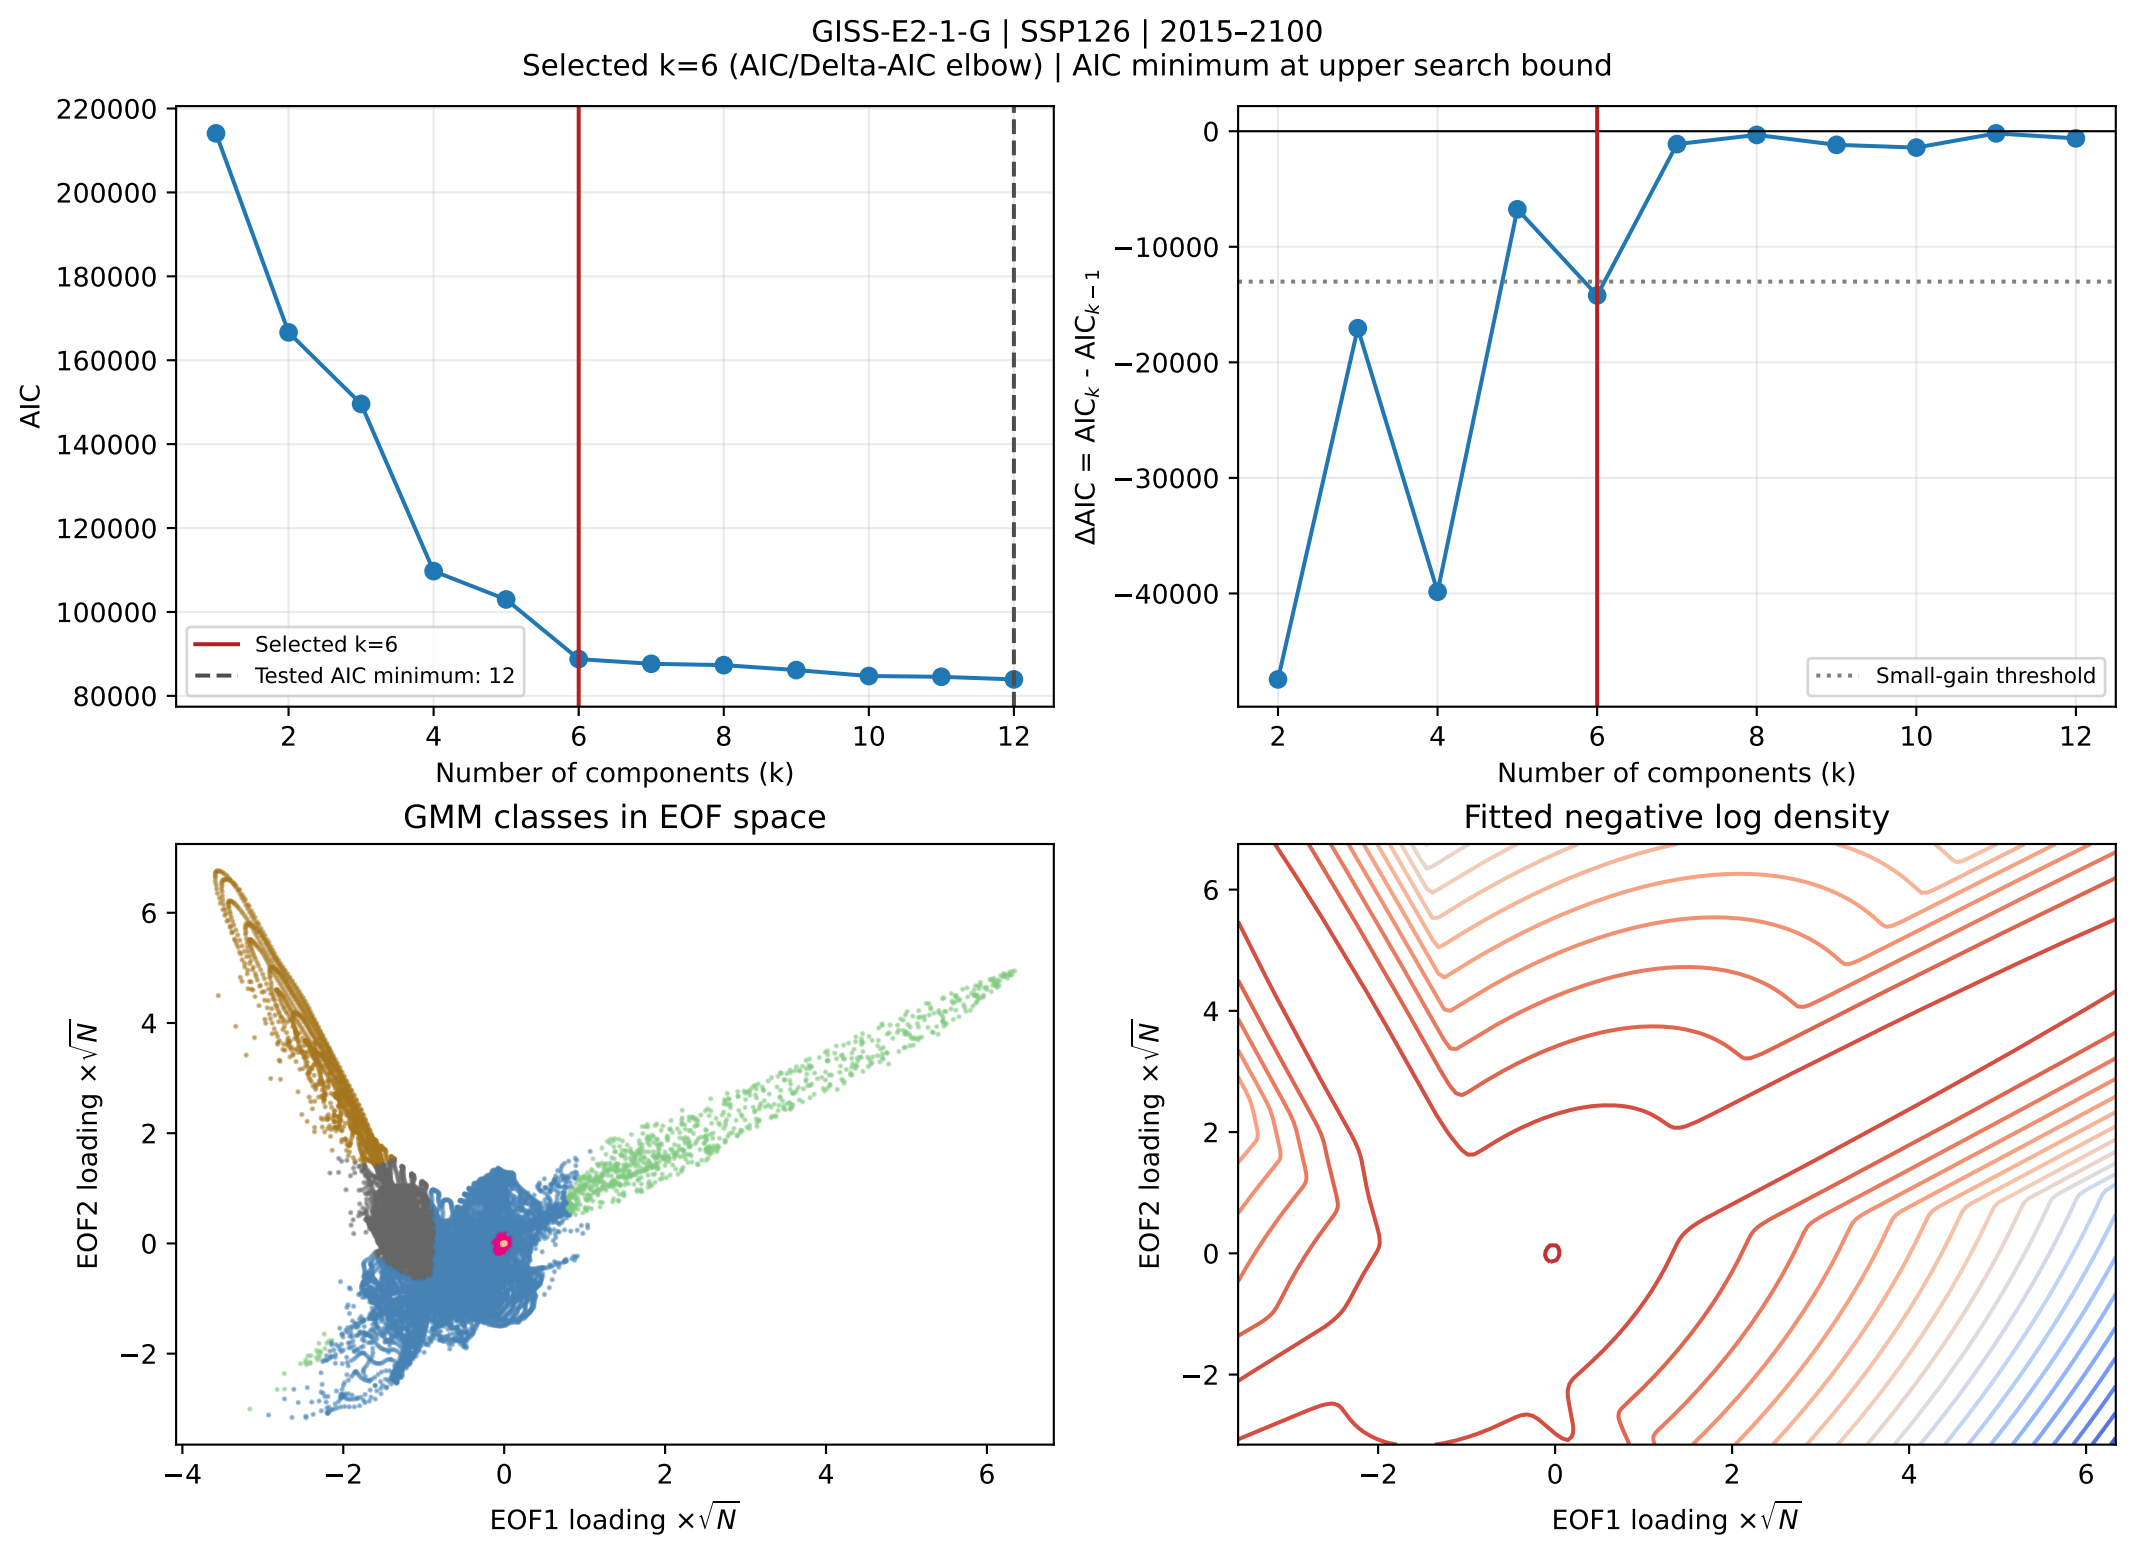

GISS-E2-1-G | SSP126 | 2015–2100
Selected k=6 (AIC/Delta-AIC elbow) | AIC minimum at upper search bound
AIC
Number of components (k)
Selected k=6
Tested AIC minimum: 12
ΔAIC = AIC_k - AIC_k−1
Small-gain threshold
GMM classes in EOF space
EOF2 loading ×√N
EOF1 loading ×√N
Fitted negative log density