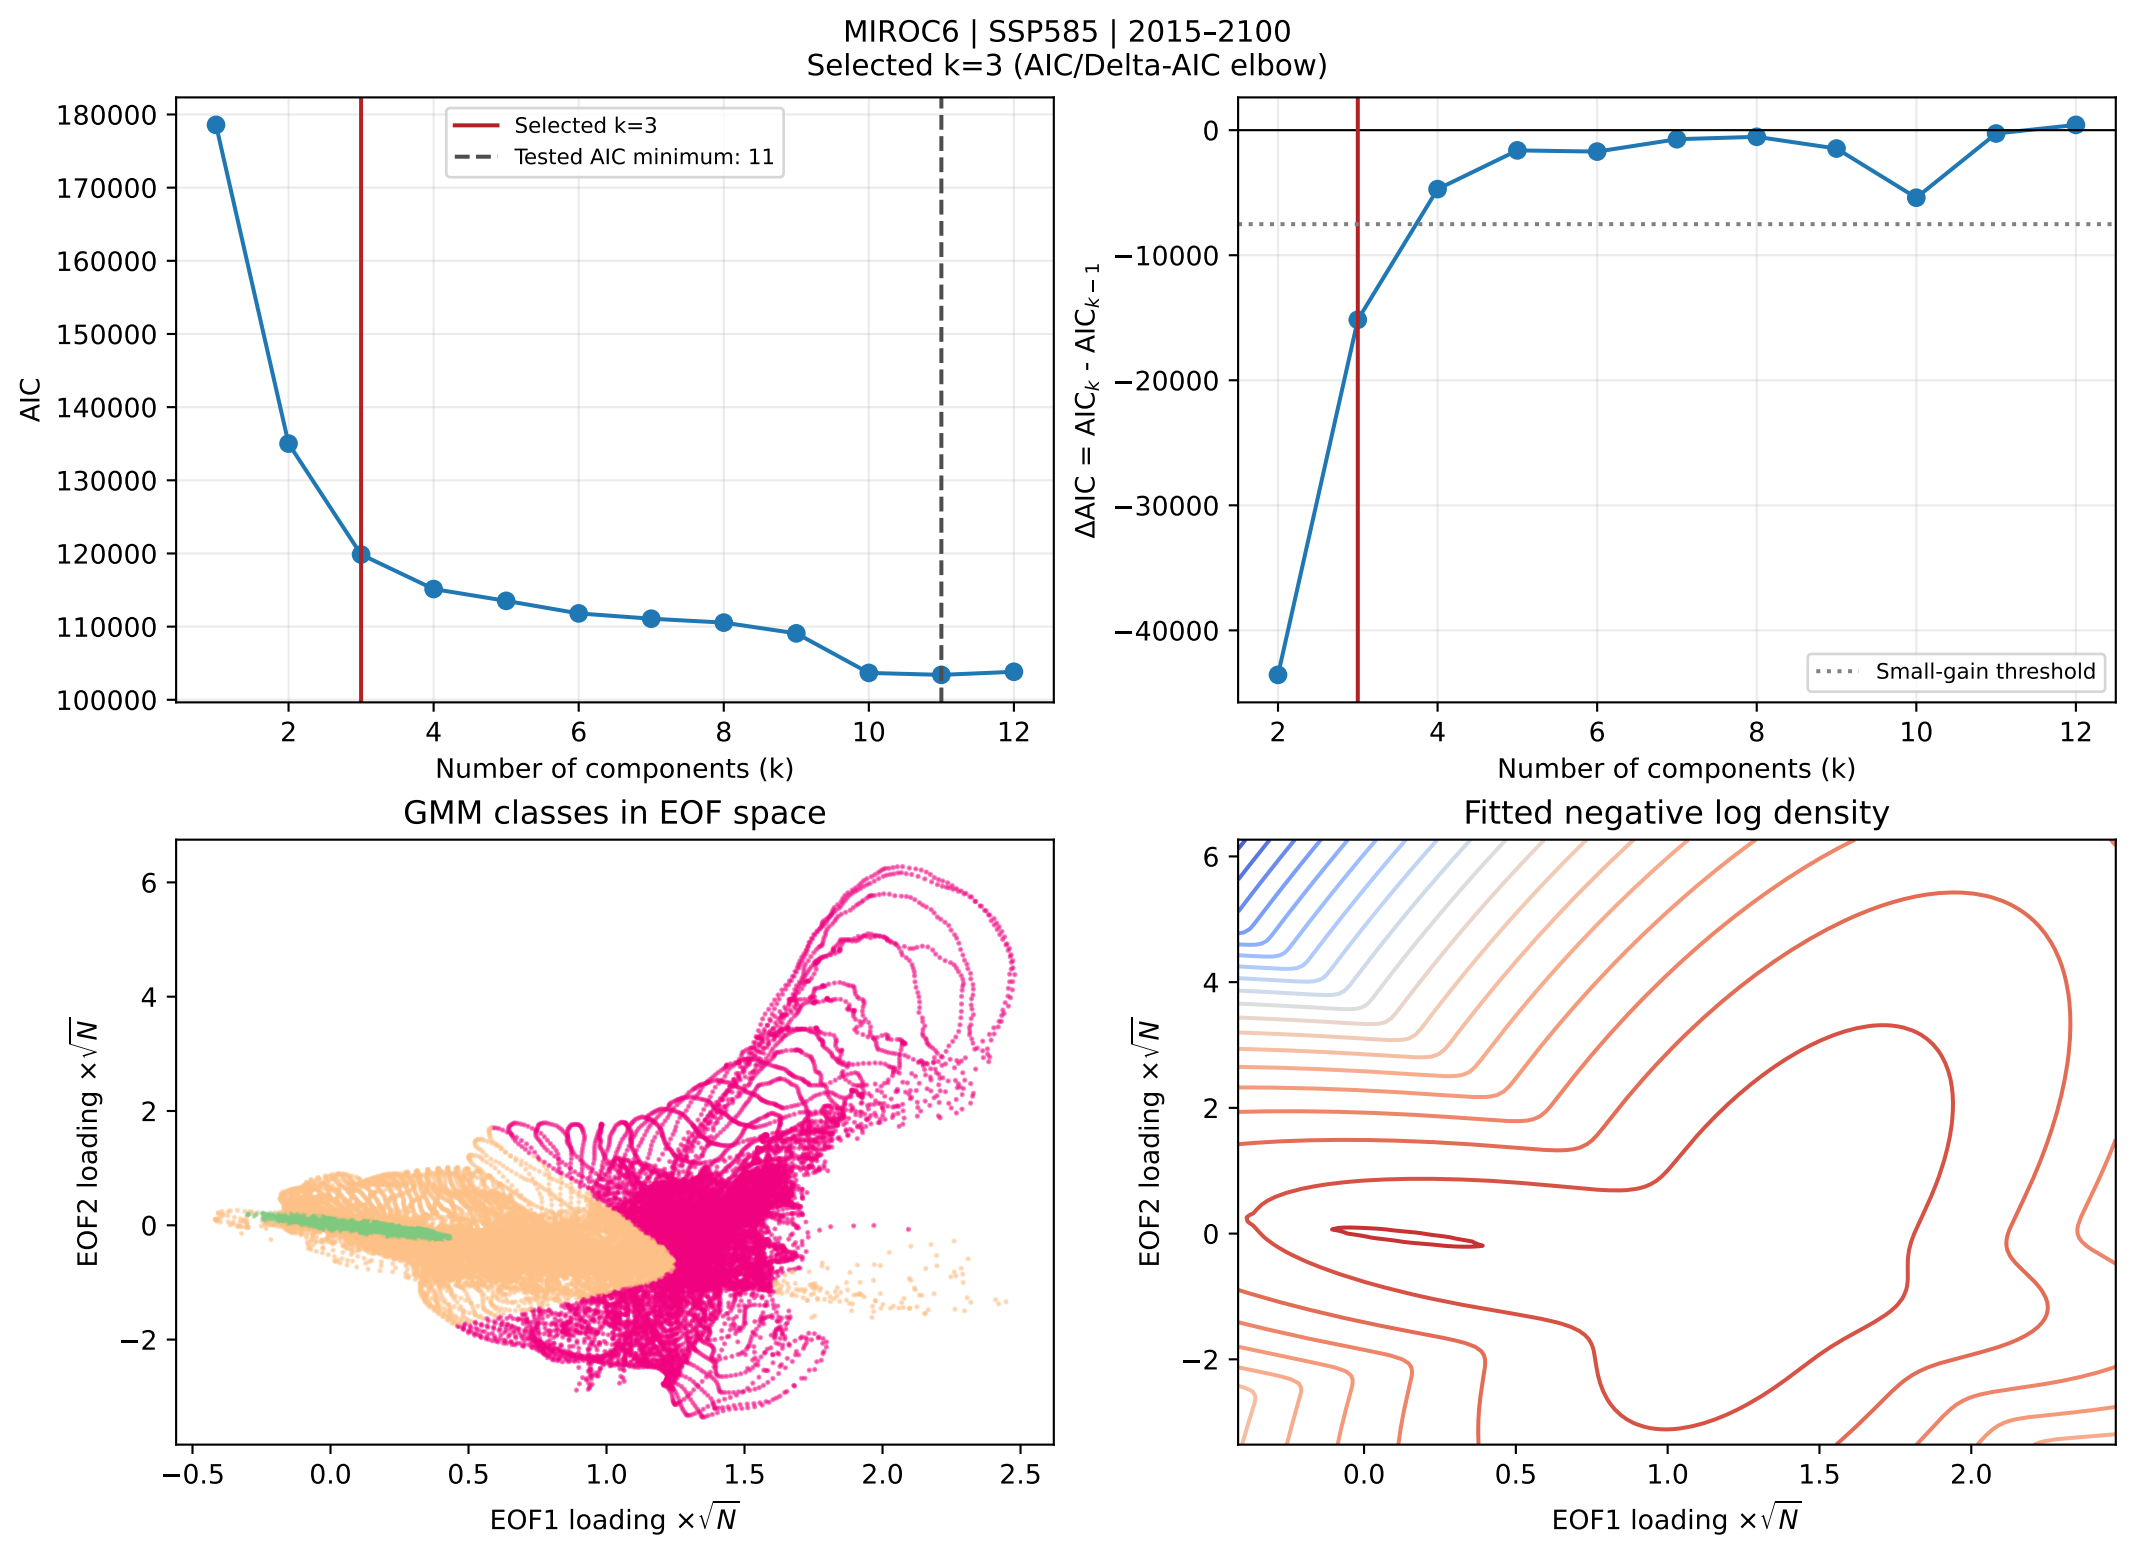

MIROC6 | SSP585 | 2015–2100
Selected k=3 (AIC/Delta-AIC elbow)
Selected k=3
Tested AIC minimum: 11
AIC
Number of components (k)
ΔAIC = AIC$_k$ - AIC$_{k-1}$
Small-gain threshold
Number of components (k)
GMM classes in EOF space
EOF2 loading ×√N
EOF1 loading ×√N
Fitted negative log density
EOF2 loading ×√N
EOF1 loading ×√N