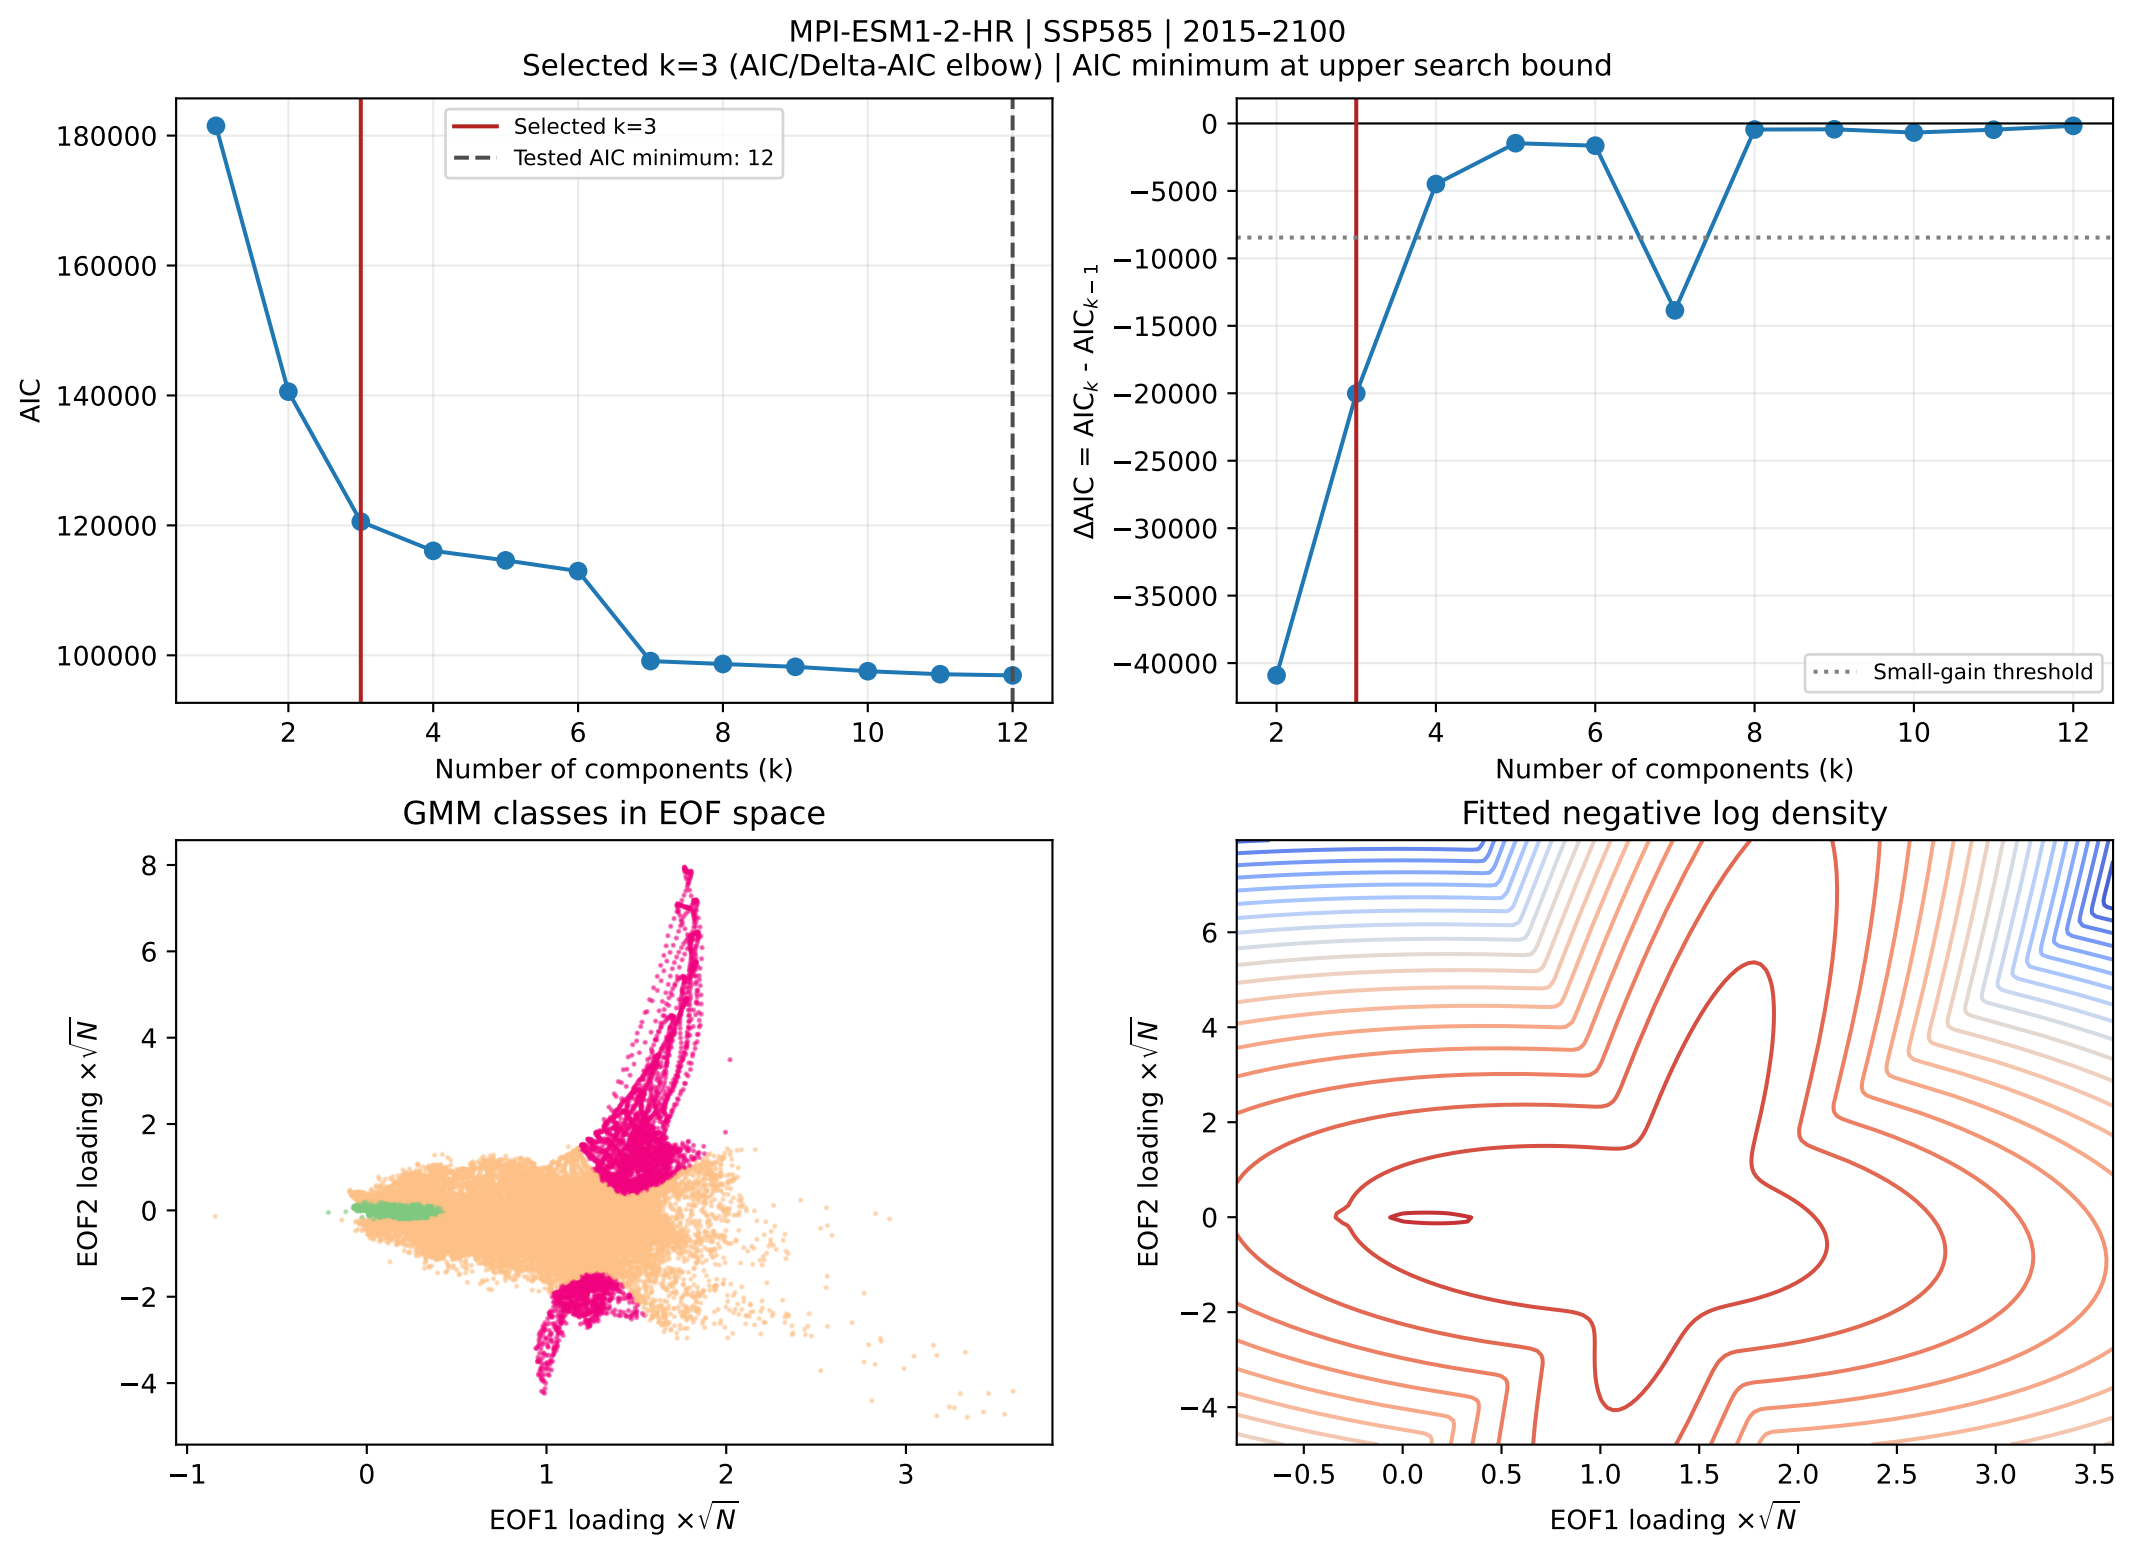

MPI-ESM1-2-HR | SSP585 | 2015–2100
Selected k=3 (AIC/Delta-AIC elbow) | AIC minimum at upper search bound
Selected k=3
Tested AIC minimum: 12
AIC
Number of components (k)
ΔAIC = AIC_k - AIC_k−1
Small-gain threshold
GMM classes in EOF space
EOF2 loading ×√N
EOF1 loading ×√N
Fitted negative log density