


# QUICKSTART VAN PI HAT

## 1 Create Image



Download the image via <https://downloads.pekaway.de> to your PC. Then load the image to a Micro SD card.


## 2 Insert the SD card

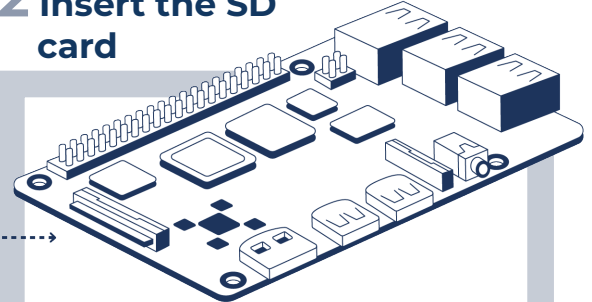

Insert the prepared Micro SD card into the card slot of your RPI.


## 3 Assembly \*

Now screw together your RPI model with the case, and secure it with the the spacers. Afterwards screw on the case cover onto the case and screw everything together.\*

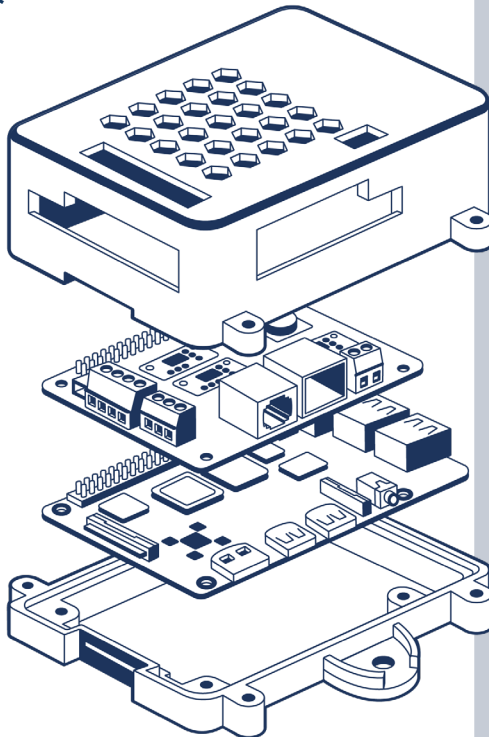

\* not necessary for the complete package


## 4 Accessories & connect Power

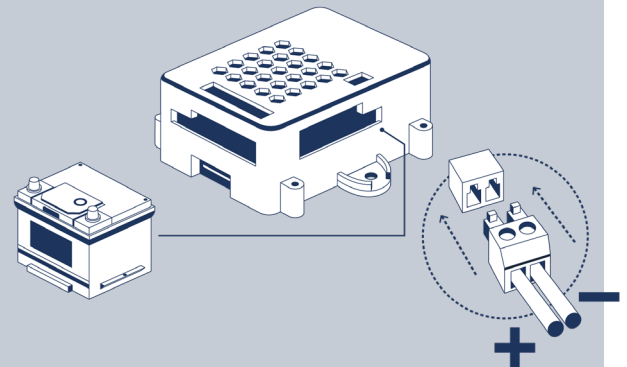

You can connect temperature- & water sensors, measuring shunt and a display to your VAN PI HAT.

## 5 Hotspot & Webinterface

For configuration your smartphone or tablet has to get connected to the WLAN Hotspot „Vanpi\_Control\_xx “ it starts automatically and you have to search for it in your WIFI settings. If you are connected, enter the address **van.pi** into your browser.\*

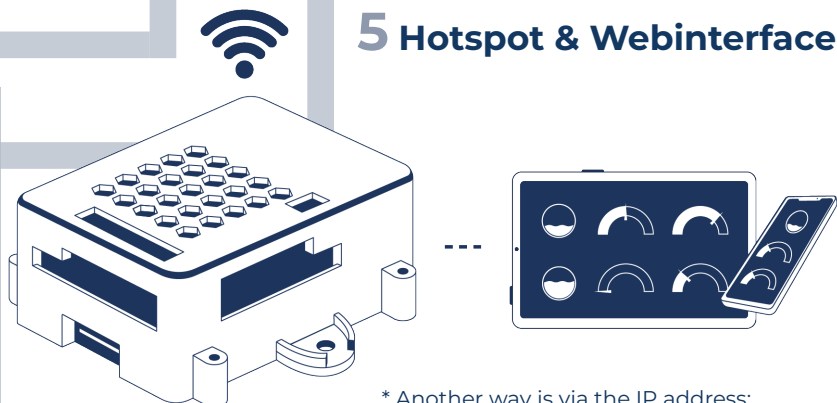

\* Another way is via the IP address:  
**192.168.4.1:1880/ui**