

FEATURES 特点

- Magnetic Shielded surface mount inductor with high current rating.
磁遮蔽表面黏著型式電感，具高額定電流
- Low resistance to keep power loss minimum. 低電阻令功率損失降至最低

APPLICATIONS 应用

- Excellent for power line DC-DC conversion applications, used in hard disk notebook computers and other electronic equipment

適合於硬式磁碟機、筆記型電腦和其他電子設備中電源線路上直流對直流整流的應用。

Product Identification 产品标识

CDRH	127	—	100	M
A	B		C	D

A.Series

B.Dimension

A x C


C.Inductance

1R0=1.0uH, 100=10uH, 101=100uH


D.Inductance Tolerance

M=±20%, N=±30%


CDRH3D11L/3D14L/3D16L

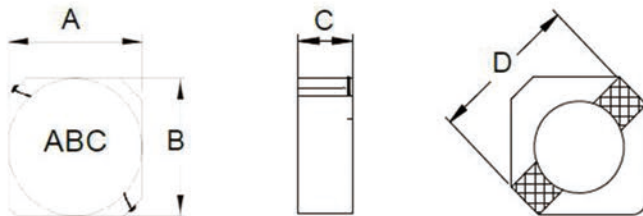

CDRH3D16/3D18/3D28/4D18/4D28/5D18
/5D28/6D28/6D38

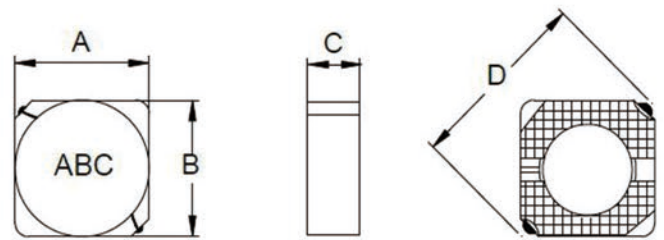

CDRH8D28/8D38/8D43

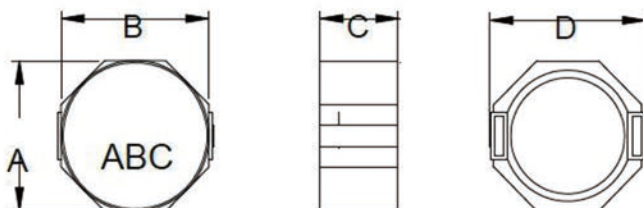

CDRH103R/104R/105R

