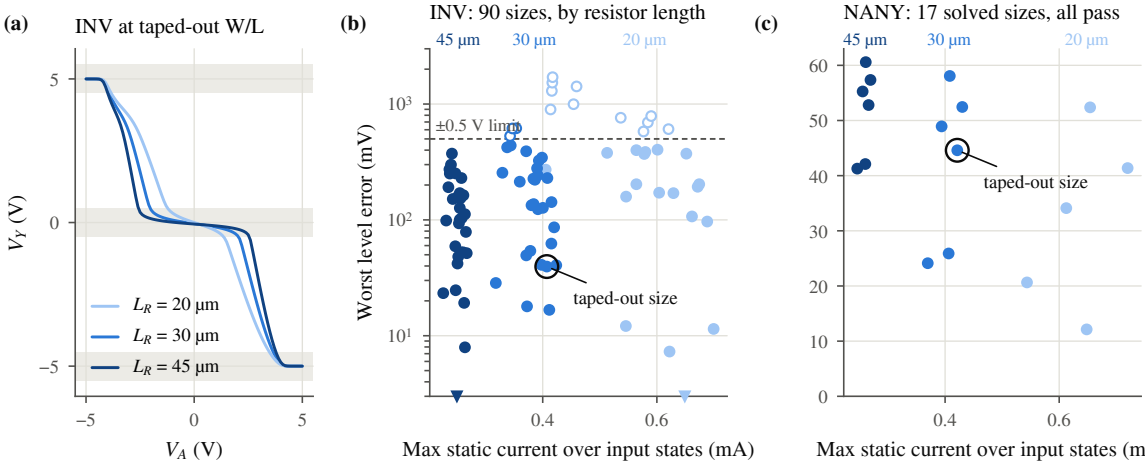
(a)
INV at taped-out W/L
5
0
−5
V_Y (V)
L_R = 20 µm
L_R = 30 µm
L_R = 45 µm
−5
0
5
V_A (V)
(b)
INV: 90 sizes, by resistor length
45 µm
30 µm
20 µm
Worst level error (mV)
10^3
10^2
10^1
±0.5 V limit
taped-out size
0.4
0.6
Max static current over input states (mA)
(c)
NANY: 17 solved sizes, all pass
45 µm
30 µm
20 µm
60
50
40
30
20
10
0
taped-out size
0.4
0.6
Max static current over input states (m