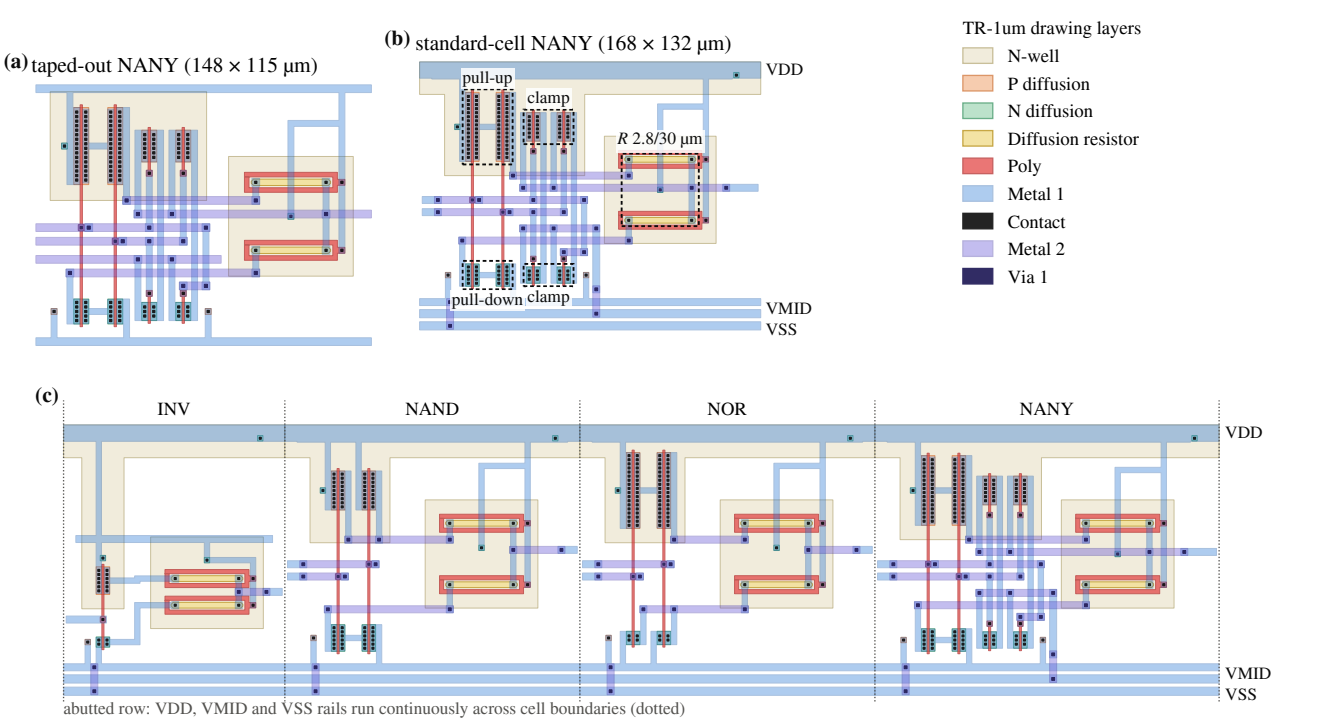
(a) taped-out NANY (148 × 115 µm)
(b) standard-cell NANY (168 × 132 µm)
pull-up
clamp
R 2.8/30 µm
pull-down
clamp
VDD
VMID
VSS
TR-1um drawing layers
N-well
P diffusion
N diffusion
Diffusion resistor
Poly
Metal 1
Contact
Metal 2
Via 1
(c)
INV
NAND
NOR
NANY
VDD
VMID
VSS
abutted row: VDD, VMID and VSS rails run continuously across cell boundaries (dotted)