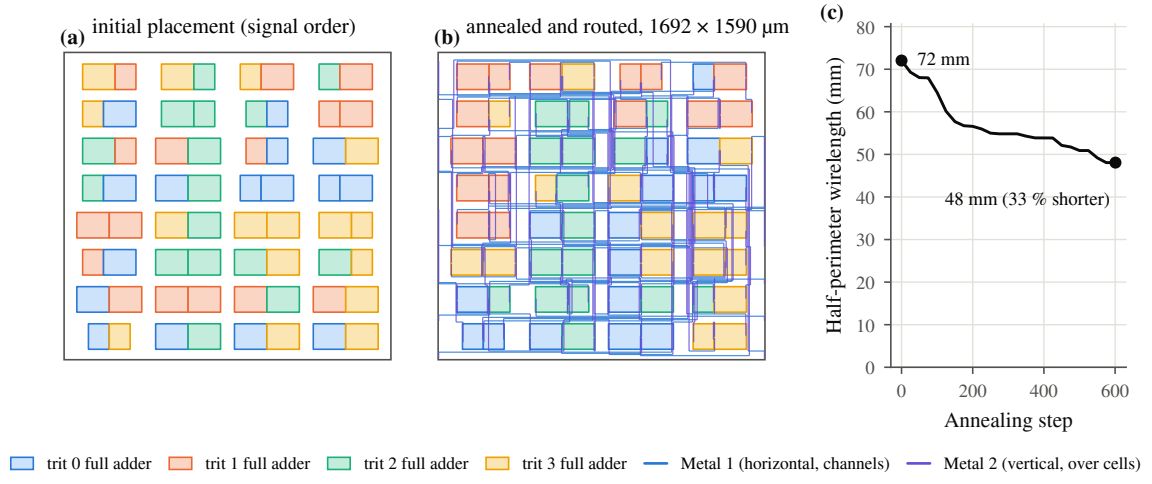
(a)
initial placement (signal order)
(b)
annealed and routed, 1692 × 1590 µm
(c)
72 mm
48 mm (33 % shorter)
Half-perimeter wirelength (mm)
Annealing step
0
10
20
30
40
50
60
70
80
0
200
400
600
trit 0 full adder
trit 1 full adder
trit 2 full adder
trit 3 full adder
Metal 1 (horizontal, channels)
Metal 2 (vertical, over cells)