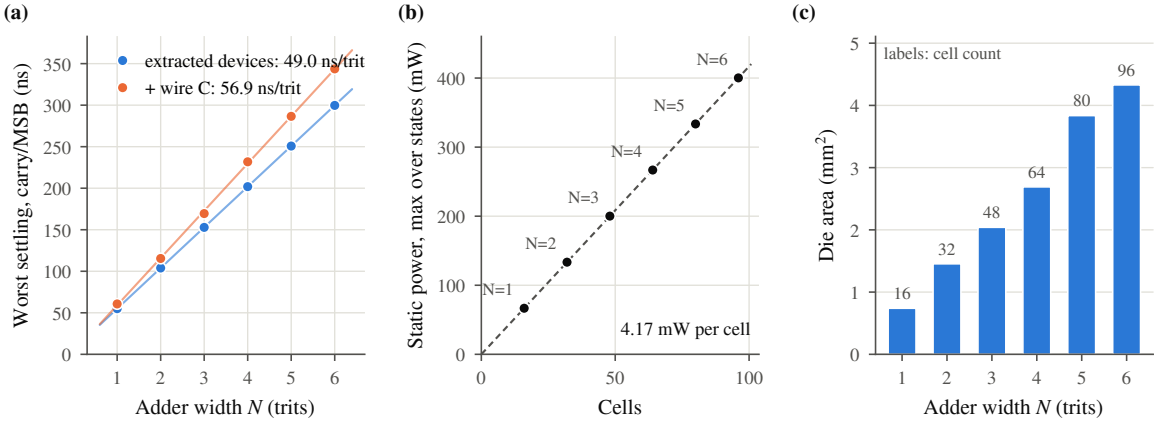
(a)
Worst settling, carry/MSB (ns)
extracted devices: 49.0 ns/trit
+ wire C: 56.9 ns/trit
Adder width N (trits)
(b)
Static power, max over states (mW)
N=1
N=2
N=3
N=4
N=5
N=6
4.17 mW per cell
Cells
(c)
labels: cell count
Die area (mm²)
16
32
48
64
80
96
Adder width N (trits)