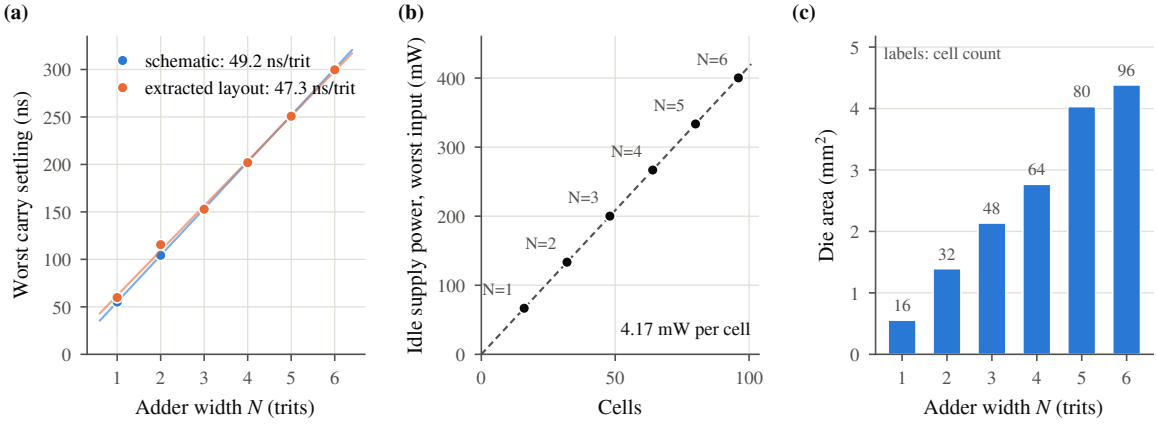
(a)
schematic: 49.2 ns/trit
extracted layout: 47.3 ns/trit
Worst carry settling (ns)
Adder width N (trits)
(b)
Idle supply power, worst input (mW)
Cells
N=1
N=2
N=3
N=4
N=5
N=6
4.17 mW per cell
(c)
labels: cell count
Die area (mm²)
Adder width N (trits)
16
32
48
64
80
96