


Schema PKT

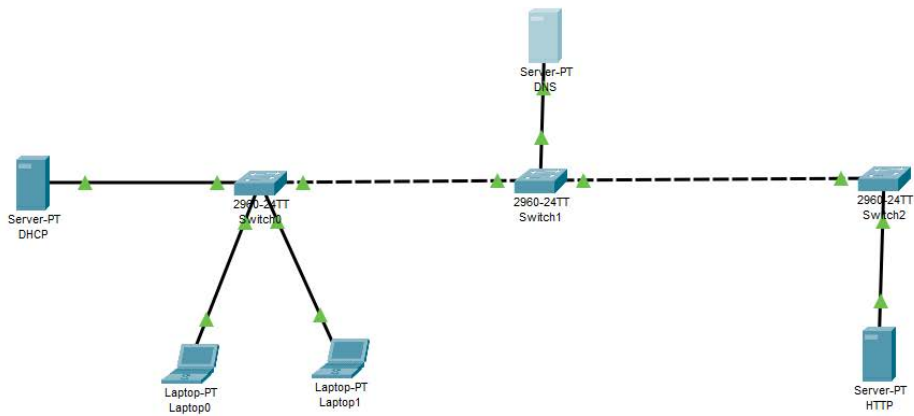

Configurazione server DHCP

DHCP

Interface: FastEthernet0 Service: ☒ On ☐ Off

Pool Name: serverPool

Default Gateway: 192.168.1.1

DNS Server: 192.168.1.4

Start IP Address: 192 168 1 5

Subnet Mask: 255 255 255 0

Maximum Number of Users: 10


TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0


Add Save Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	192.168....	192.168....	192.168....	255.255....	10	0.0.0.0	0.0.0.0



Server HTTP con index e collegamento alla pagina epicodeinternal.html

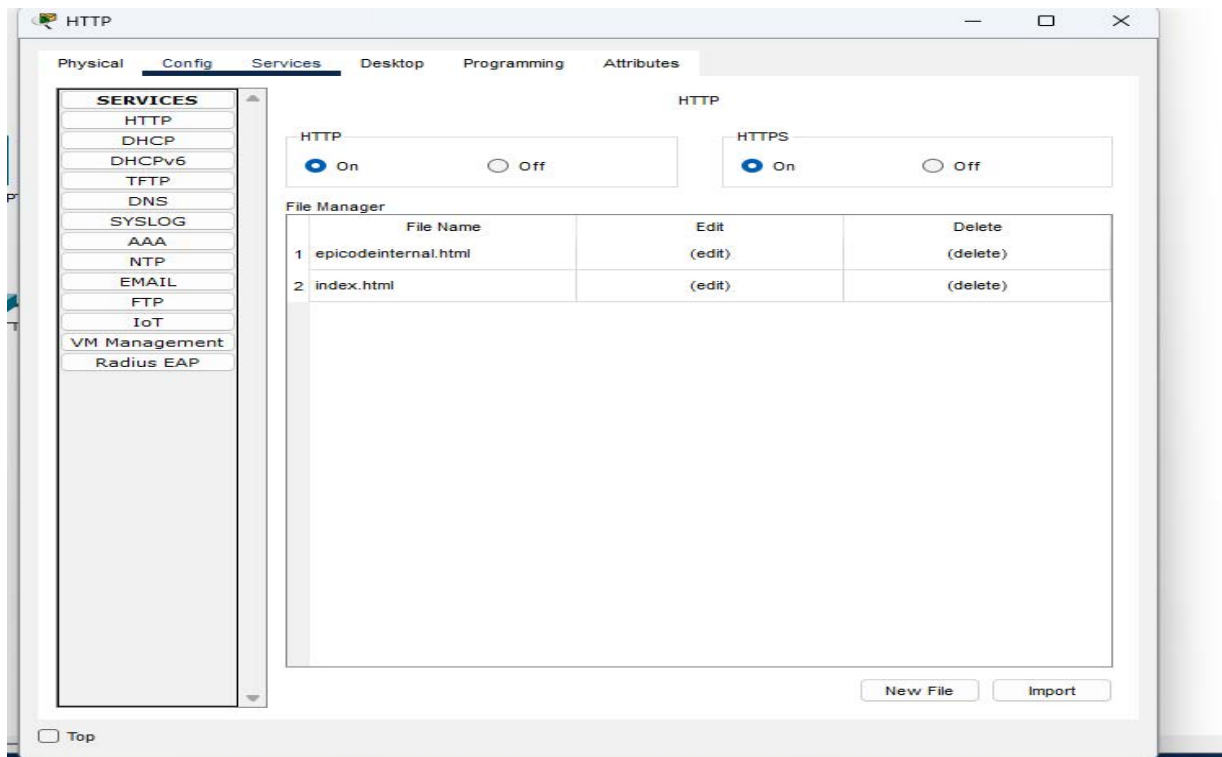


Server DNS con Record A per collegare nome a server http tramite ip statico

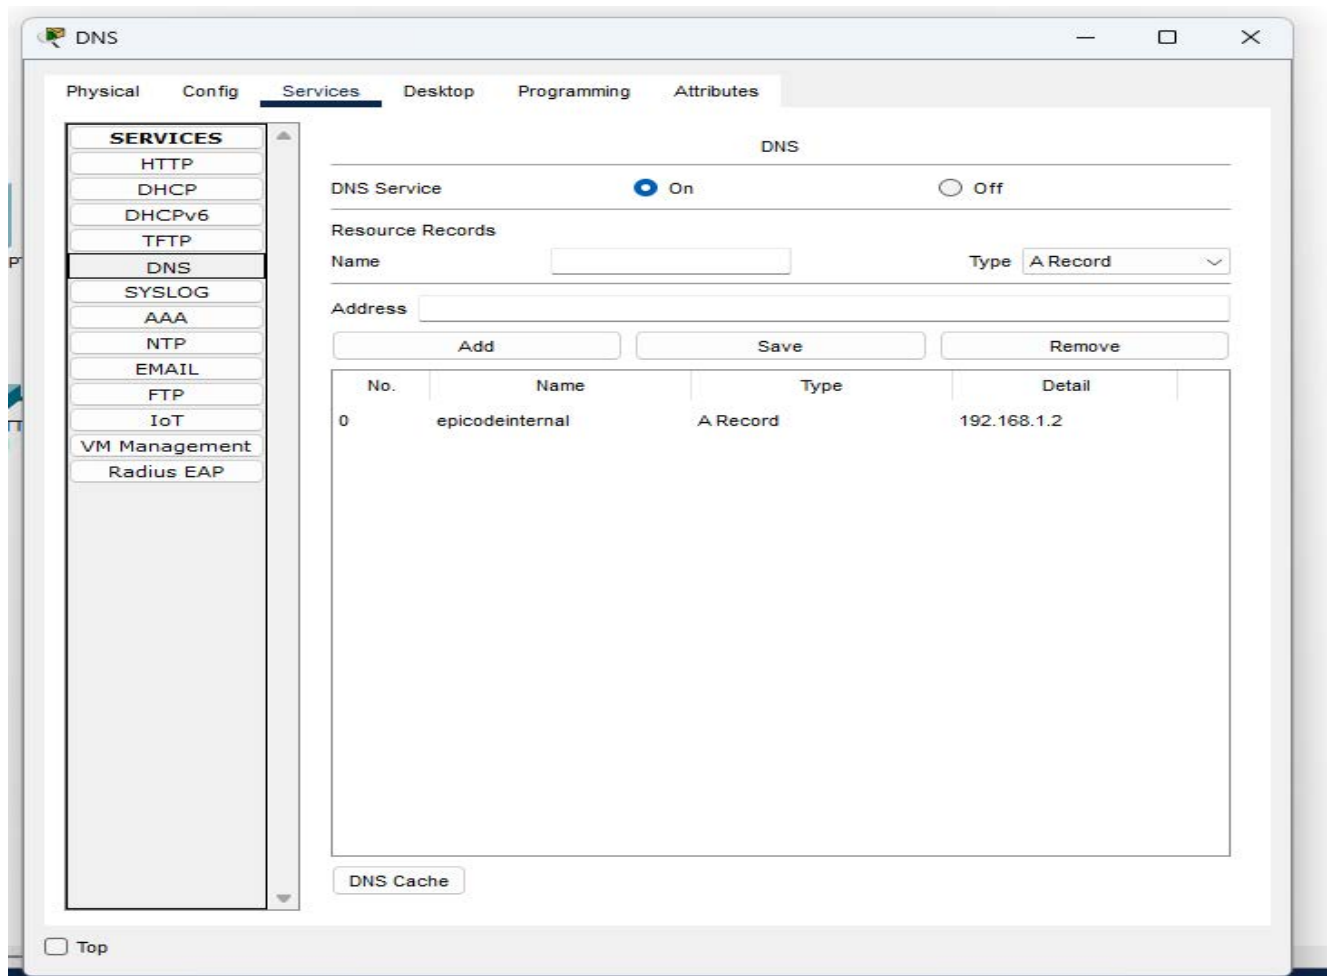

Configurazione Laptop 1 tramite DHCP ottiene gateway, dns e ip

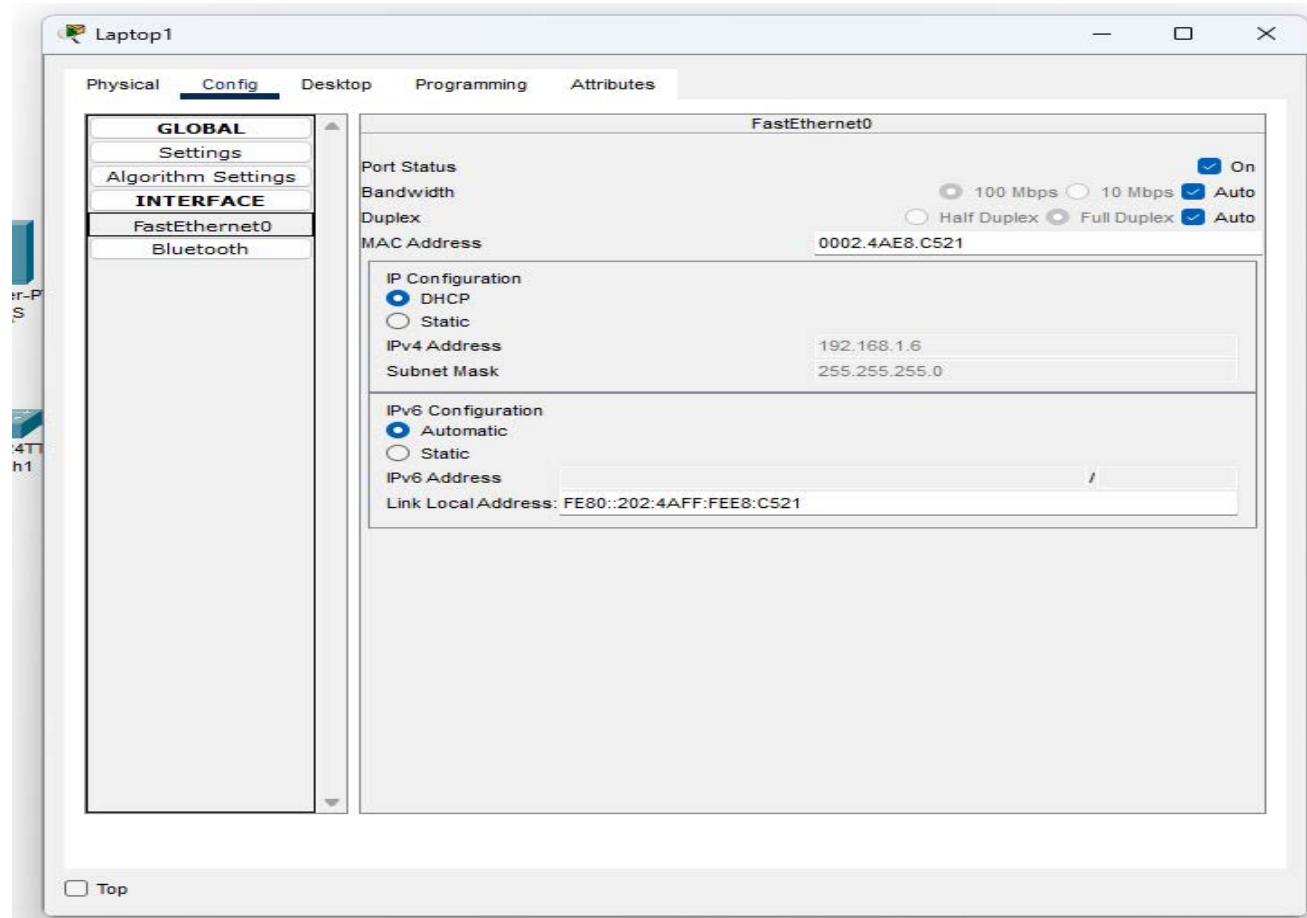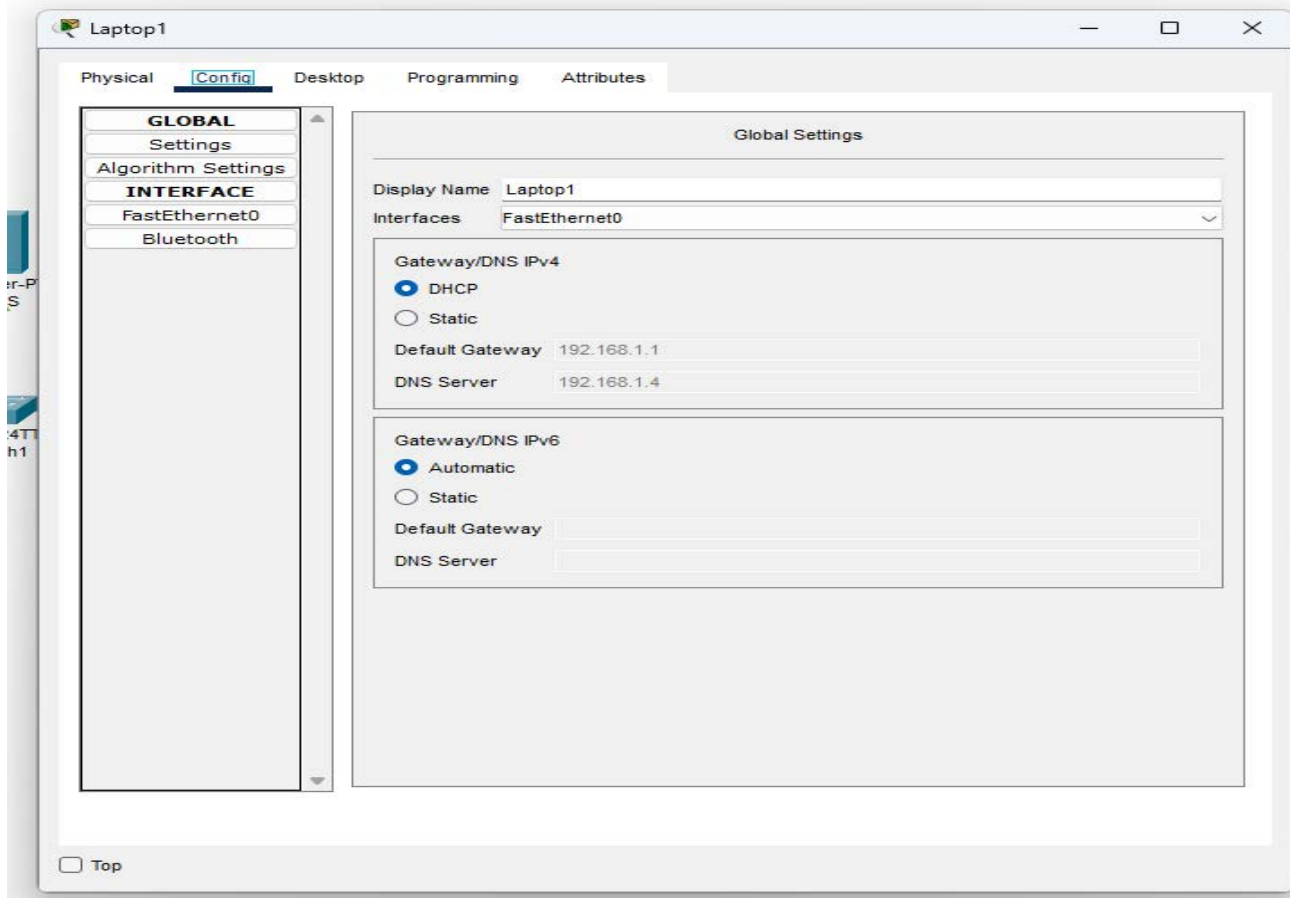

Esecuzione tramite browser interno al Laptop1 del collegamento al "sito" prova epicodeinternal

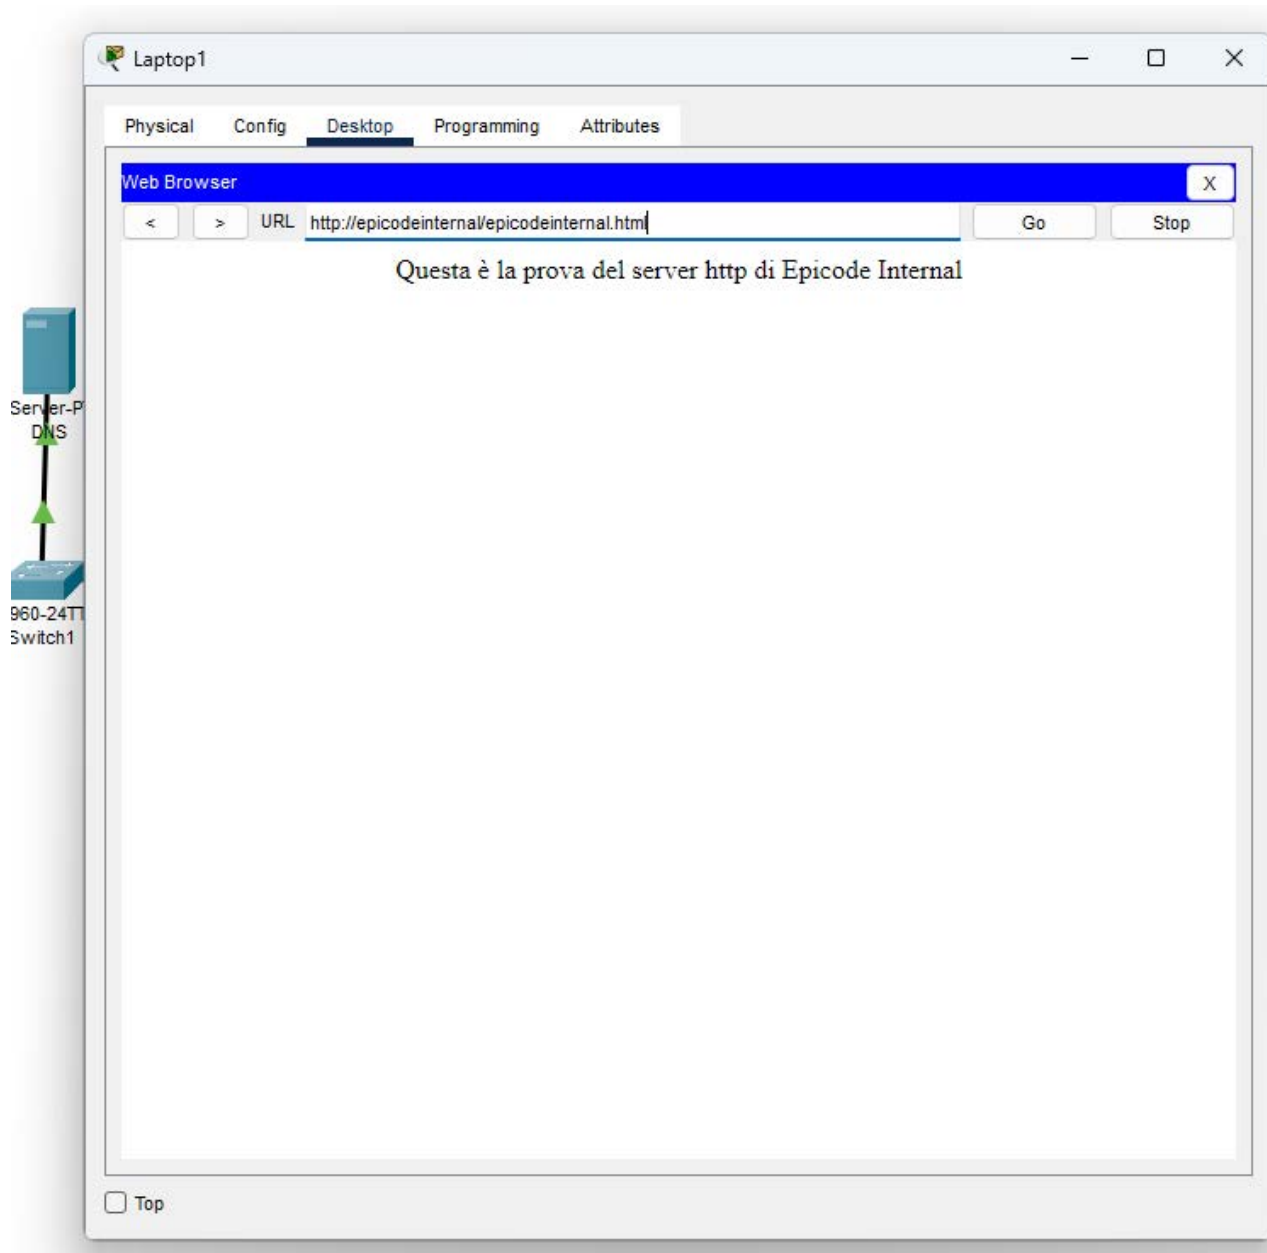

In questa esercitazione le configurazioni di IP sono statiche per i 3 server e dinamiche per i dispositivi connessi, nell'esempio 2 Laptop, ma è stato impostato il limite di IP assegnabili a 10