

TILTROTATORS

*Patented technology designed
and manufactured in Finland*

for 9-28tn excavators



**Loved by our customers
worldwide**

ROTYX® offers innovative and
patented technical solutions for
excavators.

NARROW OPERATION WIDTH

**VERY LOW OPERATION
HEIGHT**

**EASY AND FAST OPERATION,
ESPECIALLY IN NARROW
EXCAVATIONS**

**WIDE TILTING RANGE
(2X50°)**

**CONSTANT TILTING
TORQUE**

CYLINDERLESS



ROTYX®

INTELLIGENT POWER

TILTROTATOR

TR-S


EXCAVATOR WEIGHT
9-14 TONNES

Patented technology designed and manufactured in Finland 



FEATURES

- Narrow operation width
- Very low operation height
- Easy and fast operation, especially in narrow excavations
- Wide tilting range (2x50°)
- Constant tilting torque
- Cylinderless
- Maximum bucket width 1500 mm
- Speed of rotation (360°)
7 s/rotation
- Centralized lubrication system

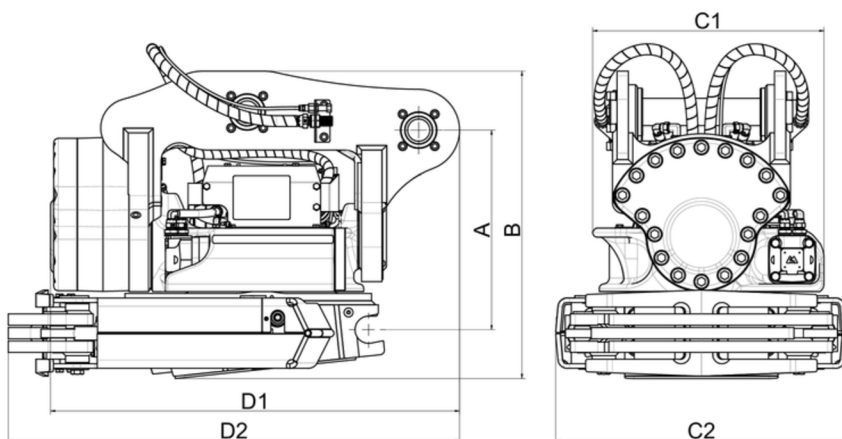

ADDITIONAL PARTS

- Additional hydraulic connector
- High flow feedthrough
- Detachable grabber module
- 2D/3D sensing
- Lifting hook
- Hand-rest for L8 joysticks
- Wheel & Track control
- Hose assembly kit

DIMENSIONS AND SPECIFICATIONS

Model	Excavator weight (t)	Top mount	Bottom mount	Height (mm) Installation A [Overall B]	Width (mm) without grippers C1 [with grippers C2]	
TR-S	9-14	S45 / S50 / DF*	S45 / S50	DF*420 [609]	440 [576]	
Model	Length (mm) without grippers D1 [with grippers D2]		Weight (kg) without grippers [with grippers]	Torque (kNm) Rotation [Tilting]	Tilting angle	Installation weight (kg)
TR-S	834 [935]		457 [534]	7 [21]	2 x 50°	457

*Direct Fit

ROBUST AND RELIABLE DESIGN

ROTYX devices have fewer fragile, wear-prone parts requiring less frequent maintenance, which reduces both planned and unplanned downtime.

MAXIMUM PERFORMANCE IN ALL CONDITIONS

Our patented innovation makes work faster, more efficient and easier.

FEWER PARTS THAT ARE EASILY DAMAGED, SUBJECT TO WEAR AND REQUIRE FREQUENT MAINTENANCE

Our user-friendly innovations improve work efficiency.

ROTYX®

INTELLIGENT POWER

TILTROTATOR

TR-M


EXCAVATOR WEIGHT
14-20 TONNES

Patented technology designed and manufactured in Finland 



FEATURES

- Narrow operation width
- Very low operation height
- Easy and fast operation, especially in narrow excavations
- Wide tilting range (2x50°)
- Constant tilting torque
- Cylinderless
- Maximum bucket width 1700 mm
- Speed of rotation (360°)
7 s/rotation
- Centralized lubrication system

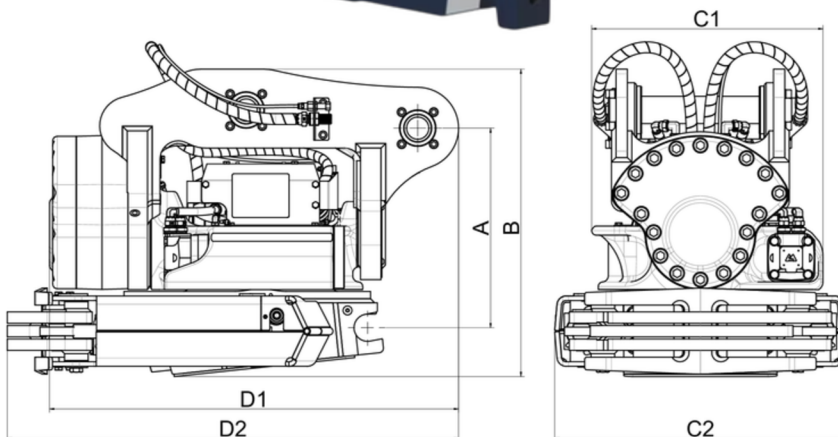

ADDITIONAL PARTS

- Additional hydraulic connector
- High flow feedthrough
- Detachable grabber module
- 2D/3D sensing
- Lifting hook
- Hand-rest for L8 joysticks
- Wheel & Track control
- Hose assembly kit

DIMENSIONS AND SPECIFICATIONS

Model	Excavator weight (t)	Top mount	Bottom mount	Height (mm)	Width (mm)	
				Installation A [Overall B]	without grippers C1 [with grippers C2]	
TR-M	14-20	S60 / S70 / DF*	S60 / S70	DF*440 / S60 480 [677]	510 [642]	
Model	Length (mm)		Weight (kg)		Torque (kNm)	
	without grippers D1 [with grippers D2]		without grippers [with grippers]		Rotation [Tilting]	Installation weight (kg)
TR-M	901 [994]		527 [644]		8,5 [30]	527

*Direct Fit

ROBUST AND RELIABLE DESIGN

ROTYX devices have fewer fragile, wear-prone parts requiring less frequent maintenance, which reduces both planned and unplanned downtime.

MAXIMUM PERFORMANCE IN ALL CONDITIONS

Our patented innovation makes work faster, more efficient and easier.

FEWER PARTS THAT ARE EASILY DAMAGED, SUBJECT TO WEAR AND REQUIRE FREQUENT MAINTENANCE

Our user-friendly innovations improve work efficiency.

ROTYX®


INTELLIGENT POWER

TILTROTATOR

TR-L


EXCAVATOR WEIGHT
20-28 TONNES

Patented technology designed and manufactured in Finland 

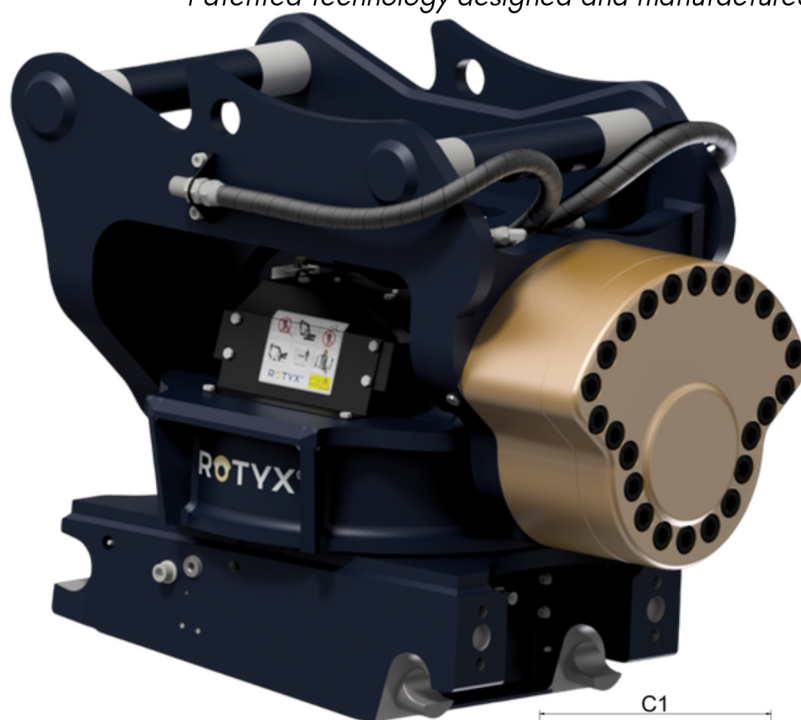

FEATURES

- Narrow operation width
- Very low operation height
- Easy and fast operation, especially in narrow excavations
- Wide tilting range (2x50°)
- Constant tilting torque
- Cylinderless
- Maximum bucket width 1700 mm
- Speed of rotation (360°)
7 s/rotation
- Centralized lubrication system

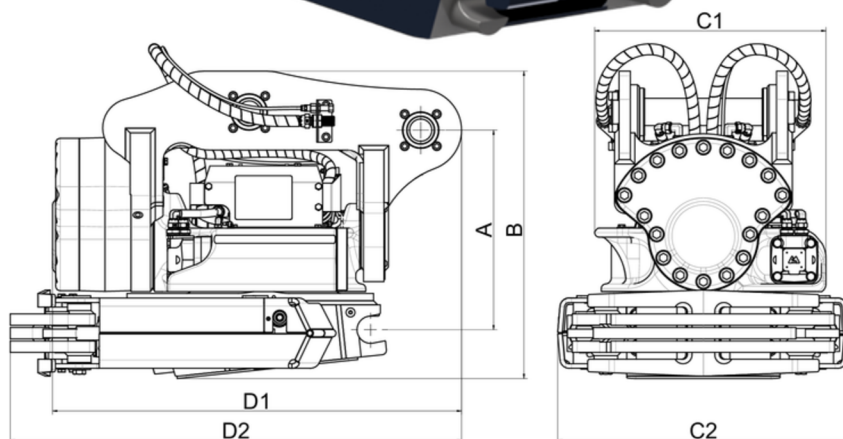

ADDITIONAL PARTS

- Additional hydraulic connector
- High flow feedthrough
- Detachable grabber module
- 2D/3D sensing
- Lifting hook
- Hand-rest for L8 joysticks
- Wheel & Track control
- Hose assembly kit

DIMENSIONS AND SPECIFICATIONS

Model	Excavator weight (t)	Top mount	Bottom mount	Height (mm) Installation A [Overall B]	Width (mm) without grippers C1 [with grippers C2]	
TR-L	20-28	S70 / S80 / DF*	S70 / S80	DF*541 / S70 611 [827]	640 [849]	
Model	Length (mm) without grippers D1 [with grippers D2]		Weight (kg) without grippers [with grippers]	Torque (kNm) Rotation [Tilting]	Tilting angle	Installation weight (kg)
TR-L	1053 [1134]		906 [1075]	12 [54]	2 x 50°	906

*Direct Fit

ROBUST AND RELIABLE DESIGN

ROTYX devices have fewer fragile, wear-prone parts requiring less frequent maintenance, which reduces both planned and unplanned downtime.

MAXIMUM PERFORMANCE IN ALL CONDITIONS

Our patented innovation makes work faster, more efficient and easier.

FEWER PARTS THAT ARE EASILY DAMAGED, SUBJECT TO WEAR AND REQUIRE FREQUENT MAINTENANCE

Our user-friendly innovations improve work efficiency.