


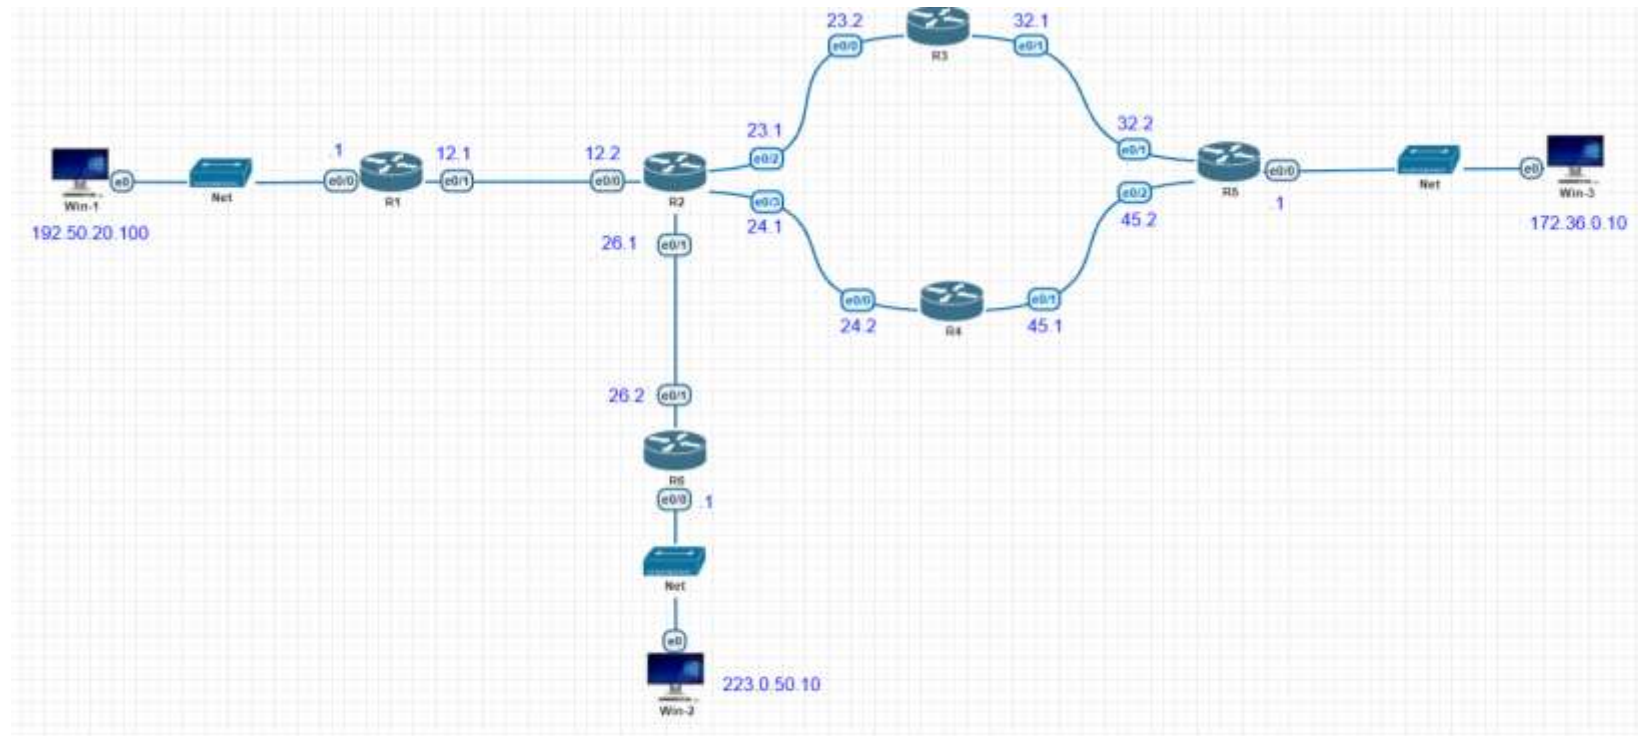

```
QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address . . . . . : 192.50.20.100
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.50.20.1

C:\Documents and Settings\user>ping 223.0.50.10

Pinging 223.0.50.10 with 32 bytes of data:

Reply from 223.0.50.10: bytes=32 time=4ms TTL=125
Reply from 223.0.50.10: bytes=32 time=2ms TTL=125
Reply from 223.0.50.10: bytes=32 time=1ms TTL=125
Reply from 223.0.50.10: bytes=32 time=2ms TTL=125

Ping statistics for 223.0.50.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\user>ping 172.36.0.10

Pinging 172.36.0.10 with 32 bytes of data:

Reply from 172.36.0.10: bytes=32 time=3ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=3ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 172.36.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>
```

