


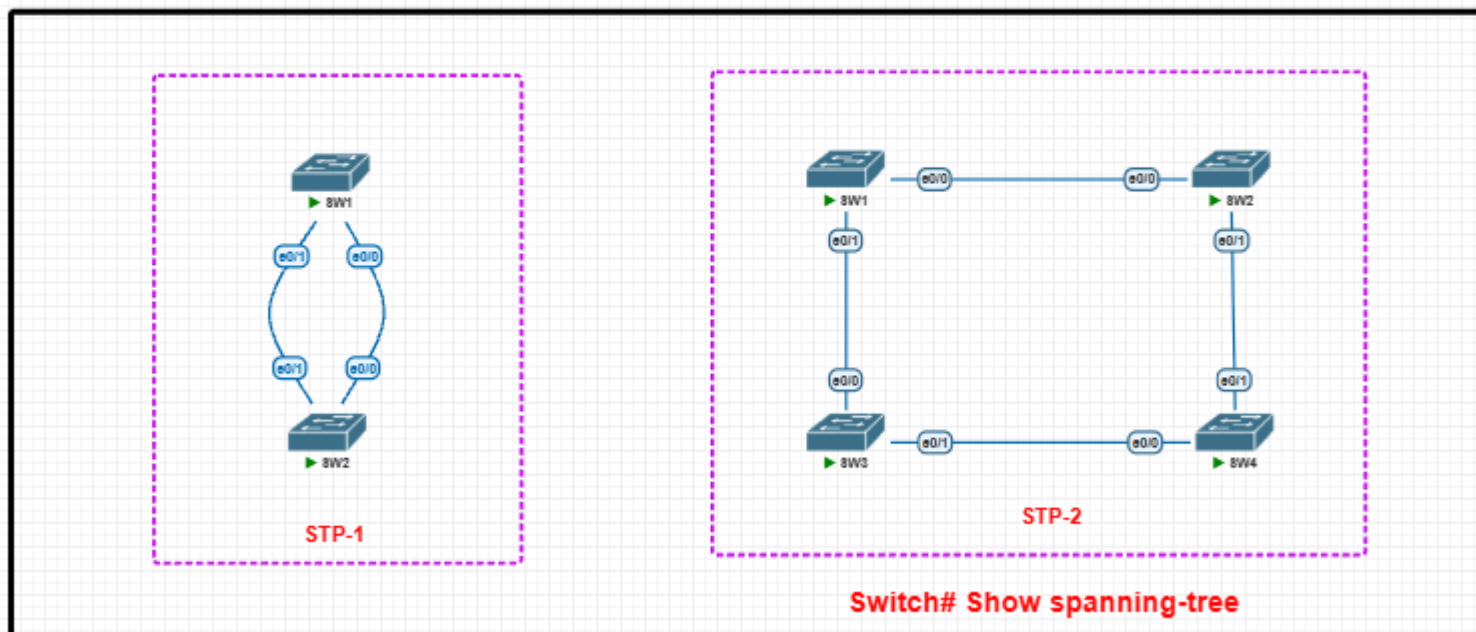

STP 1:

```
SW1#show spanning-tree

VLAN0001
Spanning tree enabled protocol ieee
Root ID    Priority      32769
           Address     aabb.cc00.0100
           Cost        100
           Port        1 (Ethernet0/0)
           Hello Time   2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID   Priority      32769 (priority 32768 sys-id-ext 1)
           Address     aabb.cc00.0600
           Hello Time   2 sec Max Age 20 sec Forward Delay 15 sec
           Aging Time   300 sec


Interface          Role Sts Cost       Prio.Nbr Type
-----
Et0/0              Root FWD 100        128.1   P2p
Et0/1              Altn BLK 100        128.2   P2p

SW1#
```

```
SW2#show spanning-tree

VLAN0001
Spanning tree enabled protocol ieee
Root ID    Priority      32769
           Address     aabb.cc00.0100
           This bridge is the root
           Hello Time   2 sec Max Age 20 sec Forward Delay 15 sec

Bridge ID   Priority      32769 (priority 32768 sys-id-ext 1)
           Address     aabb.cc00.0100
           Hello Time   2 sec Max Age 20 sec Forward Delay 15 sec
           Aging Time   300 sec


Interface          Role Sts Cost       Prio.Nbr Type
-----
Et0/0              Desg FWD 100        128.1   P2p
Et0/1              Desg FWD 100        128.2   P2p

SW2#
```

STP 2:

```
SW1#show spanning-tree

VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
             Address     aabb.cc00.0200
             Cost        200
             Port        2 (Ethernet0/1)
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec

  Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
             Address     aabb.cc00.0500
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
             Aging Time   300 sec

Interface                Role Sts Cost      Prio.Nbr Type
-----
Et0/0                    Altn BLK 100      128.1   P2p
Et0/1                    Root FWD 100      128.2   P2p

SW1#
```

```
SW2#sh spanning-tree

VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
             Address     aabb.cc00.0200
             Cost        100
             Port        2 (Ethernet0/1)
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec

  Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
             Address     aabb.cc00.0400
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
             Aging Time   300 sec

Interface                Role Sts Cost      Prio.Nbr Type
-----
Et0/0                    Desg FWD 100      128.1   P2p
Et0/1                    Root FWD 100      128.2   P2p
```

```
SW3#show spanning-tree

VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
             Address     aabb.cc00.0200
             Cost        100
             Port        2 (Ethernet0/1)
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec

  Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
             Address     aabb.cc00.0300
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
             Aging Time   300 sec

Interface                Role Sts Cost      Prio.Nbr Type
-----
Et0/0                    Desg FWD 100      128.1   P2p
Et0/1                    Root FWD 100      128.2   P2p
```

```
SW4#show spanning-tree

VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
             Address     aabb.cc00.0200
             This bridge is the root
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec

  Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
             Address     aabb.cc00.0200
             Hello Time   2 sec  Max Age 20 sec  Forward Delay 15 sec
             Aging Time   300 sec

Interface                Role Sts Cost      Prio.Nbr Type
-----
Et0/0                    Desg FWD 100      128.1   P2p
Et0/1                    Desg FWD 100      128.2   P2p
```