

# K J Somaiya College of Engineering, Mumbai-77

(Somaiya Vidyavihar University)

Batch: P4-1	Roll No.:
16010423076	
Experiment / assignment / tutorial	
No. _____	
Grade: AA / AB / BB / BC / CC / CD / DD	
Signature of the Staff In-charge with date	

## **Title – Newton's Second Law**

**CO5:** Analyze the dynamic system using D'Alembert, work energy and impulse momentum principle

### **Objective**

To verify the application of Newton's Law of Motion for bodies with acceleration

### **Theory**

Newton's second law of motion can be used conveniently to derive the equation of motion of a system under the following conditions.

1. The system undergoes either pure translation or pure rotation.
2. The motion takes place in a single plane.
3. The force acting on the system either have a constant orientation or are oriented parallel to the direction along which the point of application moves.

Newton's second law states that the force applied to a body produces a proportional acceleration, the relationship between the two is

$$F = ma$$

Where 'F' is the force applied, 'm' is the mass of the body, and 'a' is the body's acceleration. If the body is subject to multiple forces at the same time, then the acceleration is proportional to the vector sum (that is, the net force).

$$F_1 + F_2 + \dots + F_n = F_{net} = ma$$

**Department of Mechanical Engineering**

July-Dec 2023

# K J Somaiya College of Engineering, Mumbai-77

(Somaiya Vidyavihar University)

The second law can also be used to relate the net force and the momentum 'p' of the body

$$F_{net} = ma = m \frac{dv}{dt} = \frac{d(mv)}{dt} = \frac{dp}{dt}$$

Therefore, Newton's second law also states that the net force is equal to the time derivative of the body's momentum

$$F_{net} = \frac{dp}{dt}$$

Consistent with the first law, the time derivative of the momentum is non-zero when the momentum changes direction, even if there is no change in its magnitude (see time derivative). The relationship also implies the conservation of momentum. When the net force on the body is zero, the momentum of the body is constant. Both statements of the second law are valid only for constant-mass systems, since any mass that is gained or lost by the system will cause a change in momentum that is not the result of an external force. A different equation is necessary for variable-mass systems. Newton's second law requires modification if the effects of special relativity are to be taken into account, as it cannot be said that momentum is the product of inertial mass and velocity.

The equation for T, the tension of the cable in the experiment are given by,

$$\begin{aligned} T &= mg - ma \\ T &= Ma + \mu Mg \end{aligned}$$

The acceleration of an object can be found out using the below equation that is used in the experiment for the track slider setup

$$a = (mg - \mu Mg) / (M + m)$$

a = acceleration of the cart,

m = mass of the hanging weight,

g = gravitational acceleration( simulator used earth's 9.8m/s<sup>2</sup>,

μ= coefficient of friction,

M = mass of the wagon.

**Department of Mechanical Engineering**

July-Dec 2023

# K J Somaiya College of Engineering, Mumbai-77

(Somaiya Vidyavihar University)

The distance can be found out by

$$s = \frac{1}{2}at^2$$

S = displacement of the cart,

a = acceleration of the cart,

t = time for the cart to travel distance S.

## Applications

- It helps to explain the mechanics behind the motion of a body using D'Alembert's principle (restatement of 2<sup>nd</sup> law of motion). eg:- Atwood's machine.
- Applications in biomechanics.
- It is used to explain the fundamentals of atmospheric modelling where momentum equations are derived from the second law.
- Used in quantum field theory and superconductivity.
- Applications in sports like cricket.

## Setup Diagram:



Department of Mechanical Engineering

July-Dec 2023

# K J Somaiya College of Engineering, Mumbai-77

(Somaiya Vidyavihar University)

## PROCEDURE:

### Variable Region:

1. Change Friction:

This slider helps you to change the Co efficient of Friction of the surface.

2. Change hanging weight:

This slider helps you to change the hanging weight. The change will be in grams.

3. Change cart weight:

This slider helps you to change the cart weight. The change will be in grams.

4. Change pointer position:

This slider is used to change the position of the pointer. The pointer is used to measure and calculate the time for reaching the pointer position.

5. Start Button:

This button is used to start the movement of the cart.


6. Reset Button:

This button is used to reset the cart to the initial position.

### Measurement Region:

1. Time taken to reach the pointer will show the time taken by the cart to reach the pointer position in seconds.
2. The pointer distance will show the pointer position distance.
3. The acceleration shows the acceleration of the cart.

## Free Body Diagram:

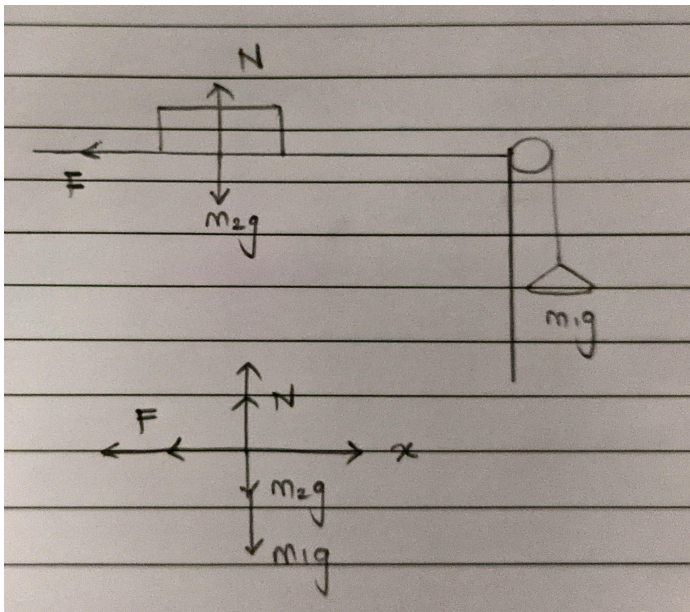

Department of Mechanical Engineering

July-Dec 2023

# K J Somaiya College of Engineering, Mumbai-77

(Somaiya Vidyavihar University)

## **OBSERVATION TABLE:**

Set No.	Hanging mass (m1), gms.	Mass of trolley (m2), gms.	Coeff. of friction	Acceleration of body (a), m/s <sup>2</sup>	
				Experimental	Analytical
1	5	10	0.002	3.254	3.253
2	10	20	0.003	3.247	3.247
3	15	30	0.004	3.241	3.240
4	20	40	0.005	3.234	3.234

## **CALCULATION:**

Take m1 as 'm' and m2 as 'M'

$$a = (mg - \mu Mg) / (M + m)$$

$$1)a=(5*9.8-0.002*10*9.8)/(15)=3.253$$

$$2)a=(10*9.8-0.003*20*9.8)/(30)=3.247$$

$$3)a=(15*9.8-0.004*30*9.8)/(45)=3.240$$

$$4)a=(20*9.8-0.005*40*9.8)/(60)=3.234$$

## **Result:**

Verified the application of Newton's Law of Motion for bodies with acceleration.

**Department of Mechanical Engineering**

July-Dec 2023

# **K J Somaiya College of Engineering, Mumbai-77**

(Somaiya Vidyavihar University)

## **Conclusion:**

The Newton's Law of bodies with acceleration is verified because the experimental and analytical values are very closely accurate to each other.

**Signature of faculty in-charge**

**Department of Mechanical Engineering**

July-Dec 2023