

Batch: D-2                      Roll No.: 16010123325

Experiment / assignment / tutorial No. 8

Grade: AA / AB / BB / BC / CC / CD / DD

**Signature of the Staff In-charge with date**

### Experiment No.:8

**TITLE: Study and configure RIP protocol using Cisco Packet tracer**

\_\_\_\_ **AIM:** To study and configure RIP protocol using Cisco Packet tracer

**Expected Outcome of Experiment:**

**CO:**

**Books/ Journals/ Websites referred:**

1. A. S. Tanenbaum, "Computer Networks", Pearson Education, Fourth Edition
2. B. A. Forouzan, "Data Communications and Networking", TMH, Fourth Edition

**Pre Lab/ Prior Concepts:**

IPv4 Addressing, Subnetting, Distance Vector Protocol, Router configuration Commands.

**New Concepts to be learned:** RIP Protocol and its configuration.

**Department of Computer Engineering**

---

## RIP (Routing Information Protocol)

RIP is a standardized Distance Vector protocol, designed for use on smaller networks. RIP was one of the first true Distance Vector routing protocols and is supported on a wide variety of systems.

RIP adheres to the following Distance Vector characteristics:

- RIP sends out periodic routing updates (every 30 seconds)
- RIP sends out the full routing table every periodic update.
- RIP uses a form of distance as its metric (in this case, hop count).
- RIP uses the Bellman-Ford Distance Vector algorithm to determine the best “path” to a particular destination

Other characteristics of RIP include:

- RIP supports IP and IPX routing.
- RIP utilizes UDP port 520
- RIP routes have an administrative distance of 120.
- RIP has a maximum hop count of 15 hops.

## RIP Versions

RIP has two versions, Version 1 (RIPv1) and Version 2 (RIPv2).

RIPv1 (RFC 1058) is **classful**, and thus does not include the subnet mask with its routing table updates. Because of this, RIPv1 does not support **Variable Length Subnet Masks (VLSMs)**. When using RIPv1, networks must be contiguous, and subnets of a major network must be configured with identical subnet masks. Otherwise, route table inconsistencies (or worse) will occur.

RIPv1 sends updates as broadcasts to address 255.255.255.255.

RIPv2 (RFC 2543) is **classless**, and thus does include the subnet mask with its routing table updates. RIPv2 fully supports VLSMs, allowing discontinuous networks and varying subnet masks to exist.

Other enhancements offered by RIPv2 include:

- Routing updates are sent via multicast, using address 224.0.0.9
- Encrypted authentication can be configured between RIPv2 routers

- Route tagging is supported.


RIPv2 can interoperate with RIPv1. By default:

- RIPv1 routers will send only Version 1 packets
- RIPv1 routers will receive both Version 1 and 2 updates
- RIPv2 routers will both send and receive only Version 2 updates

We can control the version of RIP a particular interface will “send” or “receive.”

Unless RIPv2 is manually specified, a Cisco will default to RIPv1 when configuring RIP.

### RIPv1 Basic Configuration

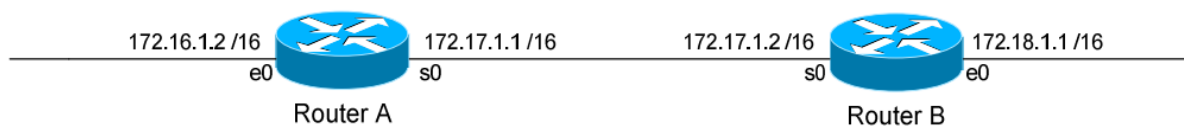

Routing protocol configuration occurs in Global Configuration mode. On Router A, to configure RIP, we would type:

```
Router(config)# router rip
Router(config-router)# network 172.16.0.0
Router(config-router)# network 172.17.0.0
```

The first command, router rip, enables the RIP process.

The network statements tell RIP which networks you wish to advertise to other RIP routers. We simply list the networks that are directly connected to our router. Notice that we specify the networks at their classful boundaries, and we do not specify a subnet mask.

To configure Router B:

```
Router(config)# router rip
Router(config-router)# network 172.17.0.0
Router(config-router)# network 172.18.0.0
```

The routing table on Router A will look like:

```
RouterA# show ip route
```

```
Gateway of last resort is not set
C    172.16.0.0 is directly connected, Ethernet0
C    172.17.0.0 is directly connected, Serial0
R    172.18.0.0 [120/1] via 172.17.1.2, 00:00:00, Serial0
```

The routing table on Router B will look like:

**RouterB# show ip route**

Gateway of last resort is not set

C 172.17.0.0 is directly connected, Serial0

C 172.18.0.0 is directly connected, Ethernet0

R 172.16.0.0 [120/1] via 172.17.1.1, 00:00:00, Serial0

## IMPLEMENTATION:

### Static Routing-

#### Network (PC) setup in Routers


```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fa 0/0
Router(config-if)#ip address 192.168.10.254 255.255.255.0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
```


```
Router1(config-if)#
Router1(config-if)#interface se2/0
Router1(config-if)#ip address 192.168.30.1 255.255.255.0
Router1(config-if)#no shut

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router1(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
```


```
Router1(config)#ip route 192.168.20.0 255.255.255.0 se2/0
Router1(config)#
Router1(config)#
Router1(config)#ip route 192.168.40.0 255.255.255.0 se2/0
Router1(config)#
Router1(config)#ip route 192.168.50.0 255.255.255.0 se2/0
Router1(config)#
Router1(config)#
```

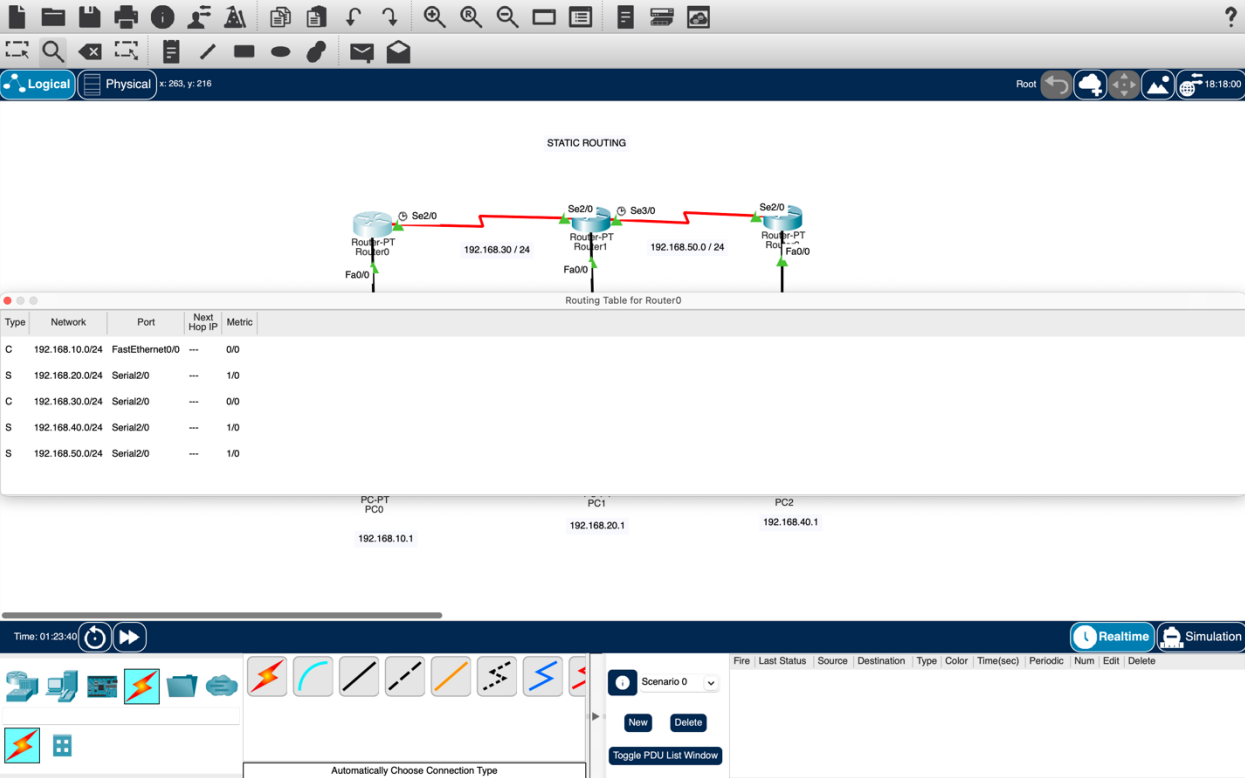


### Final Routing-

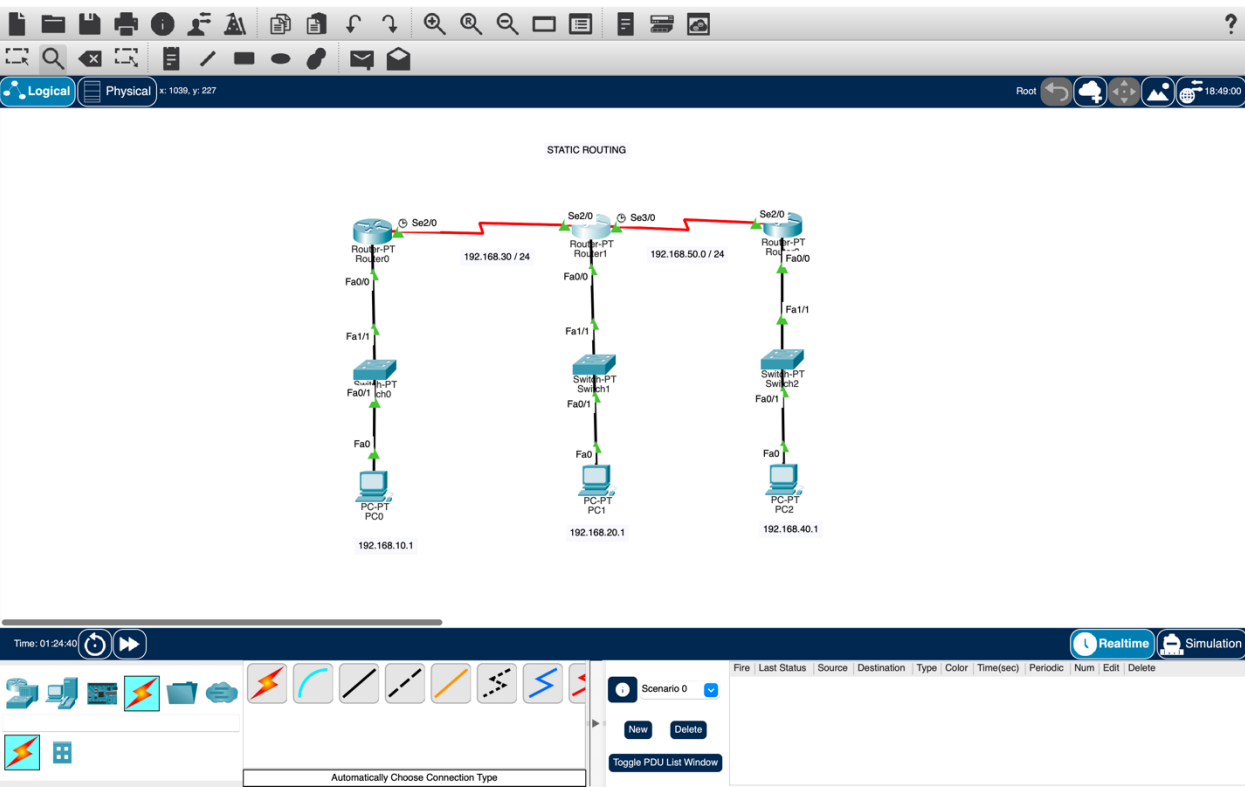

## Packet Example

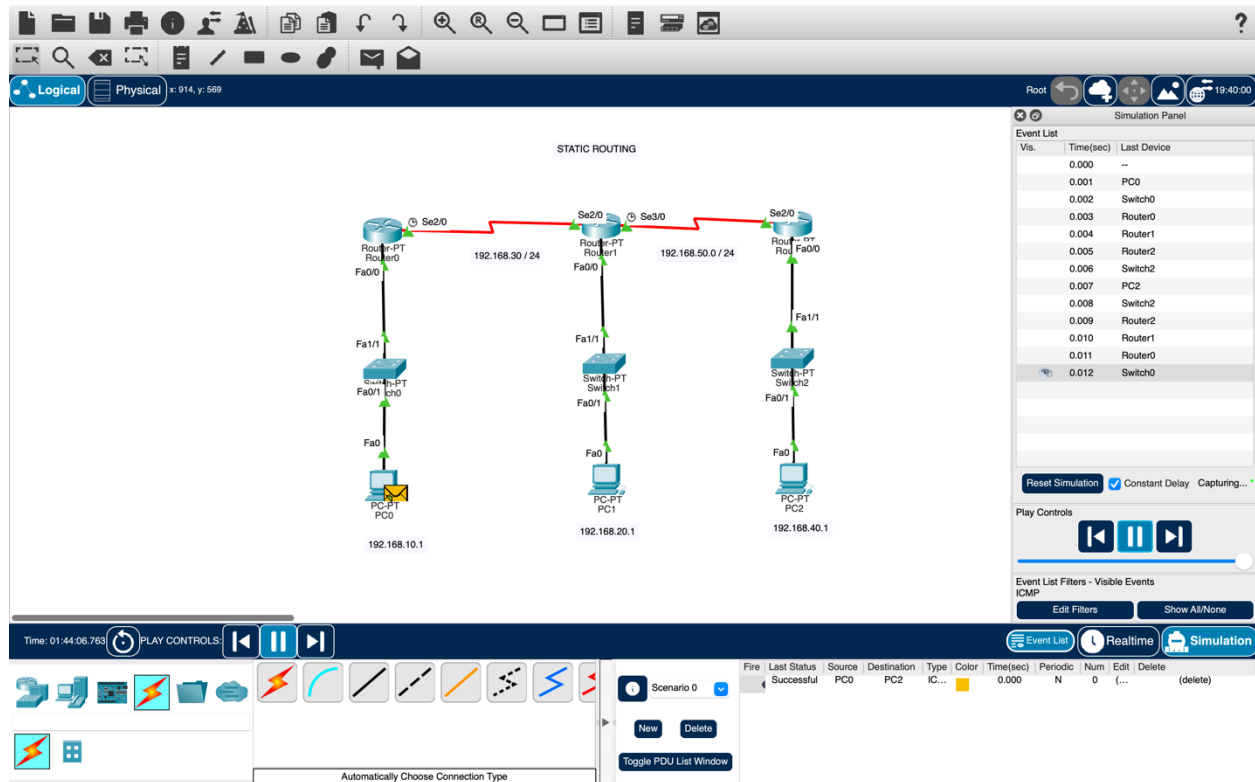

## Dynamic-

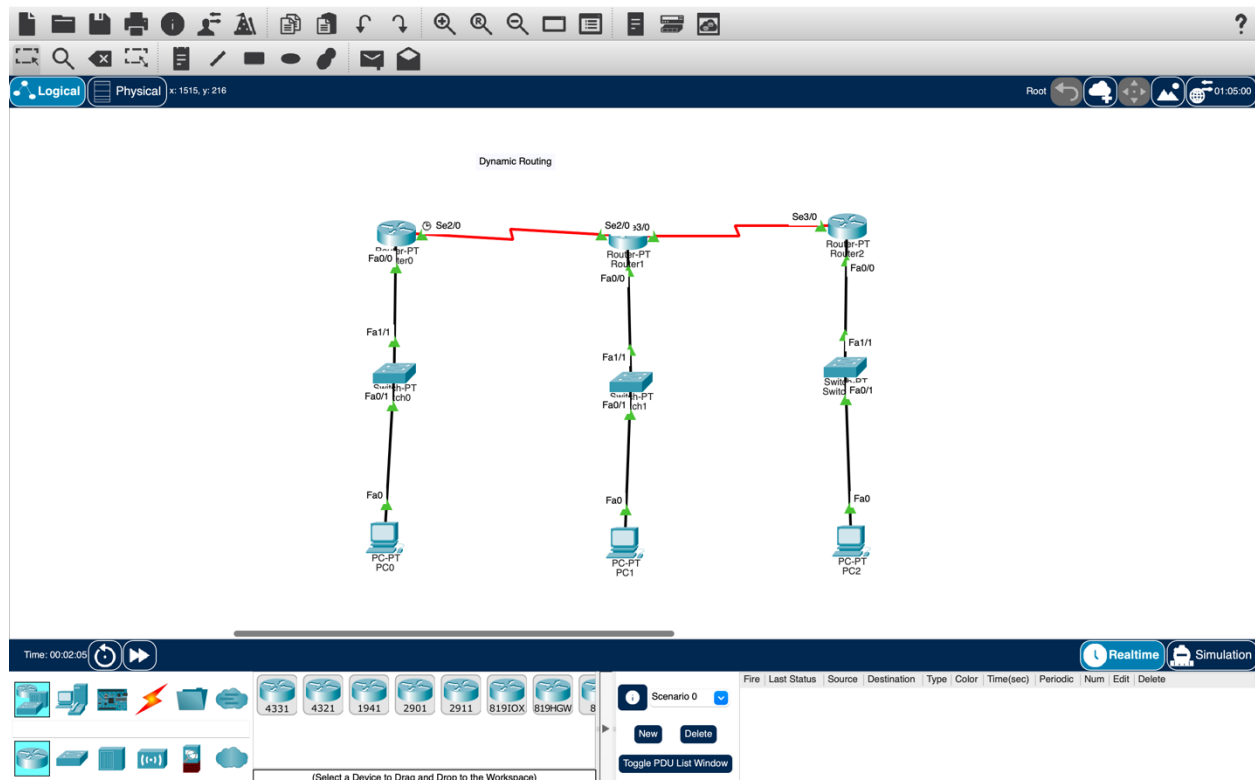

## Routing Tables

Dynamic Routing

Routing Table for Router0

Type	Network	Port	Next Hop IP	Metric
C	192.168.10.0/24	FastEthernet0/0	---	0/0
R	192.168.20.0/24	Serial2/0	192.168.30.2	120/1
C	192.168.30.0/24	Serial2/0	---	0/0
R	192.168.40.0/24	Serial2/0	192.168.30.2	120/2
R	192.168.50.0/24	Serial2/0	192.168.30.2	120/1

Dynamic Routing


Routing Table for Router1

Type	Network	Port	Next Hop IP	Metric
R	192.168.10.0/24	Serial2/0	192.168.30.1	120/1
C	192.168.20.0/24	FastEthernet0/0	---	0/0
C	192.168.30.0/24	Serial2/0	---	0/0
R	192.168.40.0/24	Serial3/0	192.168.50.2	120/1
C	192.168.50.0/24	Serial3/0	---	0/0


Simulation Panel

Event List

Vis.	Time(sec)	Last Device
0.000	--	
0.001	PC0	
0.002	Switch0	
0.003	Router0	
0.004	Router1	
0.005	Switch1	

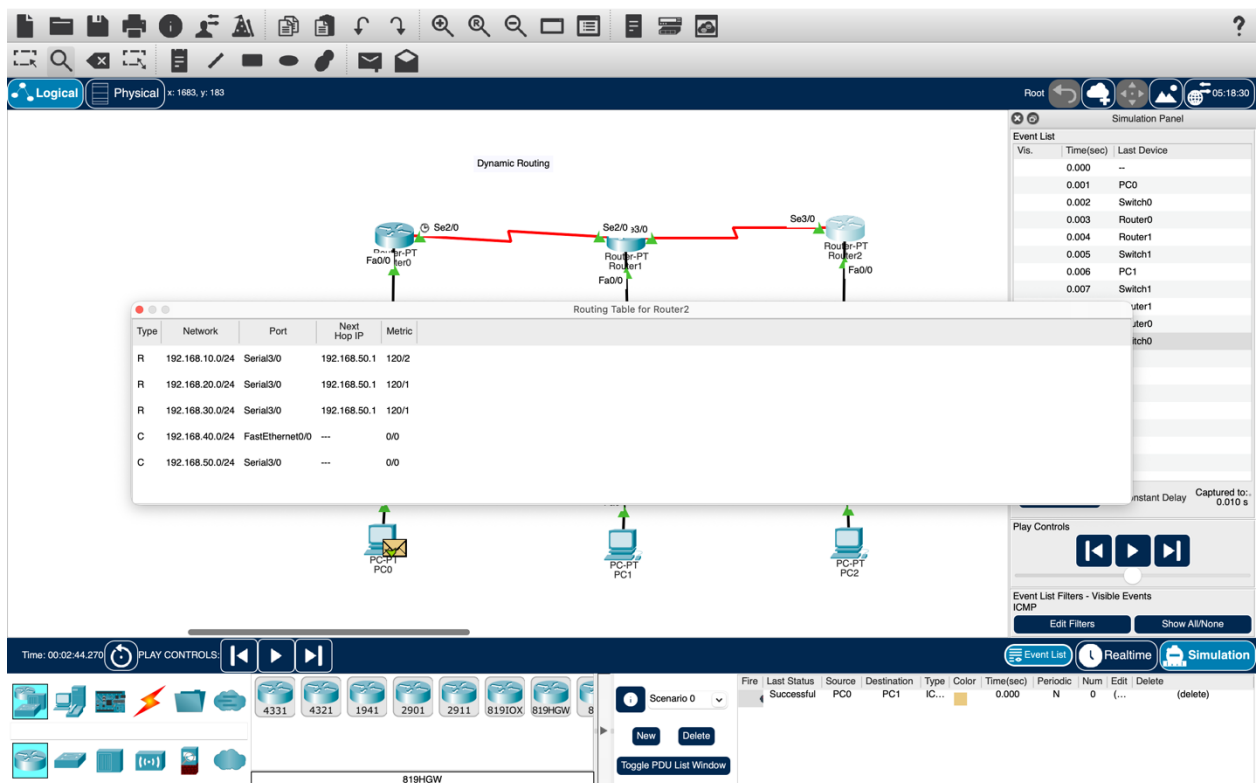

## Packet Example-

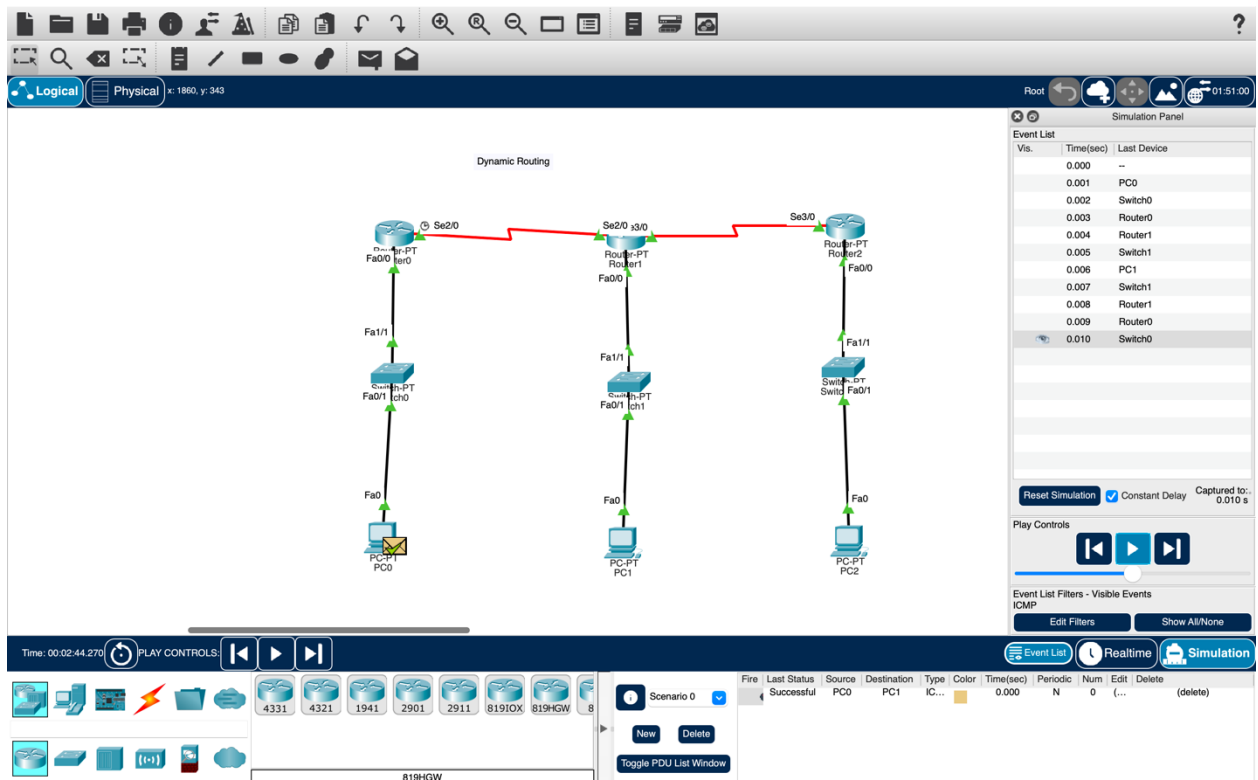





**SOMAIYA**  
VIDYAVIHAR UNIVERSITY

K J Somaiya School of Engineering  
(formerly K J Somaiya College of Engineering)

**Somaiya Vidyavihar University**  
**K. J. Somaiya School of Engineering, Mumbai**  
**Department of Computer Engineering**



## **CONCLUSION:**

The above experiment highlights implementation of static routing and dynamic routing using RIP Protocol using CLI.

### Post Lab Questions

1. .... are two popular examples of distance vector routing protocols.

A. OSPF and RIP

**B. RIP and BGP**

C. BGP and OSPF

D. BGP and SPF

2. A ..... routing table contains information entered manually.

**A. static**

B. dynamic

C. hierarchical

D. non static

3. A ..... routing table is updated periodically using one of the dynamic routing protocols.

A. static

**B. dynamic**

C. hierarchical

D. non static

4. Which of the following is not the category of dynamic routing algorithm.

A. Distance vector protocols

B. Link state protocols

C. Hybrid protocols

**D. Automatic state protocols**

5. In ..... forwarding, the mask and destination addresses are both 0.0.0.0 in the routing table.

A. next-hop

B. network-specific

C. host-specific

**D. default**

6. Differentiate between Distance Vector Routing and Link State Routing.

Feature	Distance Vector Routing	Link State Routing
Routing Algorithm	Bellman-Ford	Dijkstra's Shortest Path First
Updates	Periodic (entire routing table)	Only when topology changes (partial updates)
Knowledge	Only knows directly connected neighbors	Knows complete network topology
Examples	RIP, BGP	OSPF, IS-IS

Date: \_\_\_\_\_

Signature of faculty in-charge