


RCA VICTOR MODEL SHP-14

www.radiomuseum.org

Chassis No. RS-175A

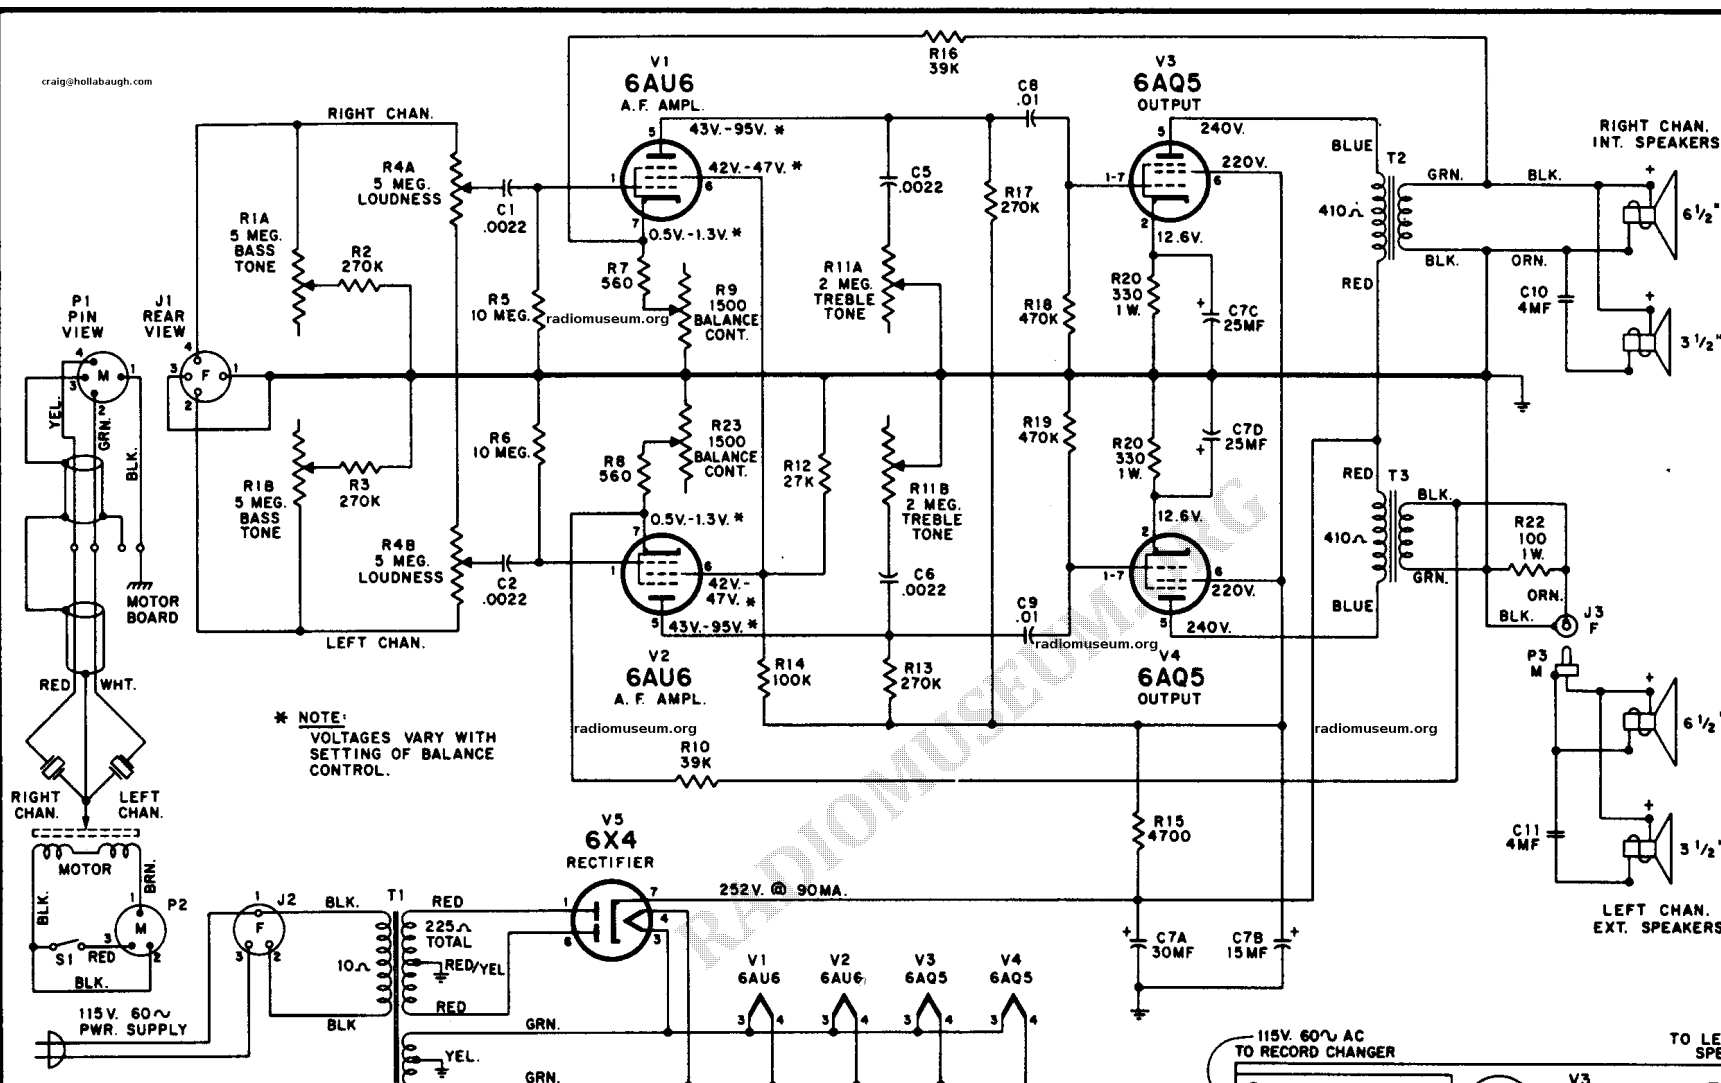

NOTES

It is not necessary to measure the audio output while making the equalization adjustment; sufficient accuracy can usually be had by listening. This is best done by playing a monaural record with the left channel speaker placed for stereo listening. Adjust one balance control so that the combined sound of the two speakers appears to come from a point midway between the two speakers.

If the external speaker system is other than 3.2 ohms impedance, the output voltages will not be equal for equal power output.

NOTE—The "ON-OFF" switch is not part of the volume control. The record changer must be "ON" for power to be applied to the amplifier.

