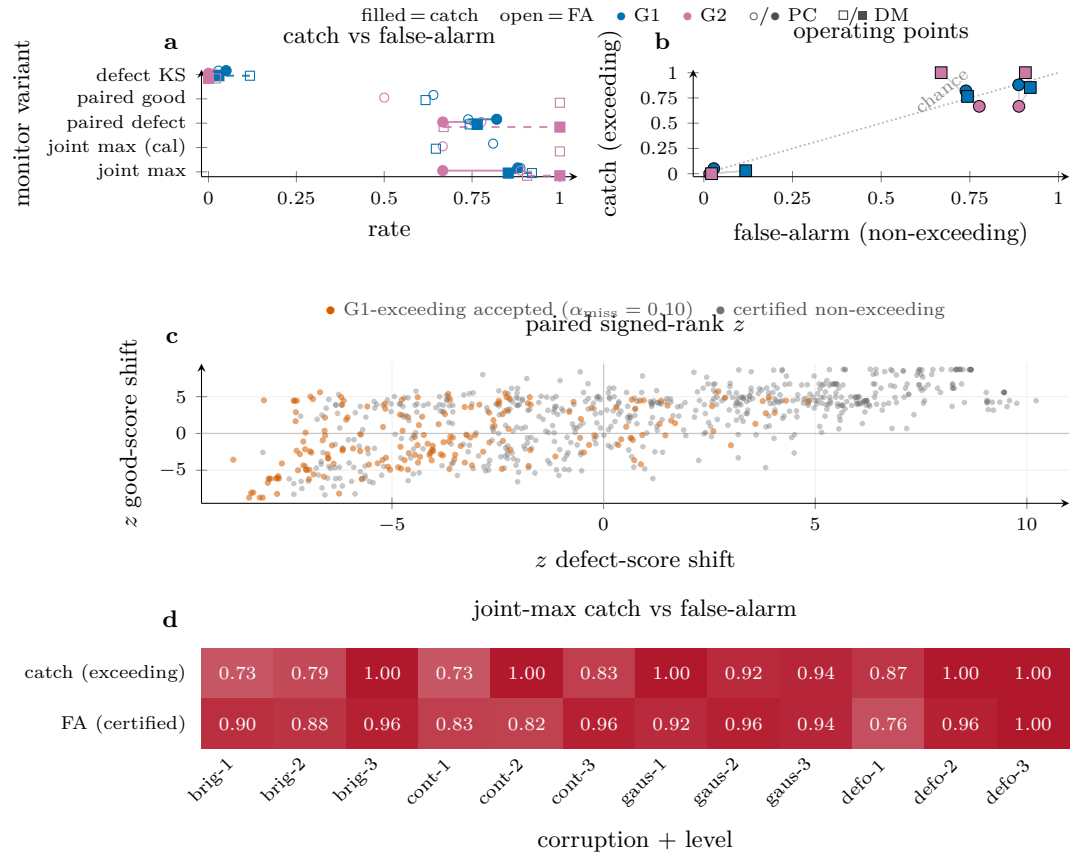
filled = catch open = FA G1 G2 PC DM
a
catch vs false-alarm
monitor variant
defect KS
paired good
paired defect
joint max (cal)
joint max
rate
b
operating points
catch (exceeding)
false-alarm (non-exceeding)
chance
G1-exceeding accepted ($\alpha_{\text{miss}} = 0.10$)
certified non-exceeding
c
paired signed-rank z
z good-score shift
z defect-score shift
d
joint-max catch vs false-alarm
catch (exceeding) 0.73 0.79 1.00 0.73 1.00 0.83 1.00 0.92 0.94 0.87 1.00 1.00
FA (certified) 0.90 0.88 0.96 0.83 0.82 0.96 0.92 0.96 0.94 0.76 0.96 1.00
brig-1 brig-2 brig-3 cont-1 cont-2 cont-3 gaus-1 gaus-2 gaus-3 defo-1 defo-2 defo-3
corruption + level