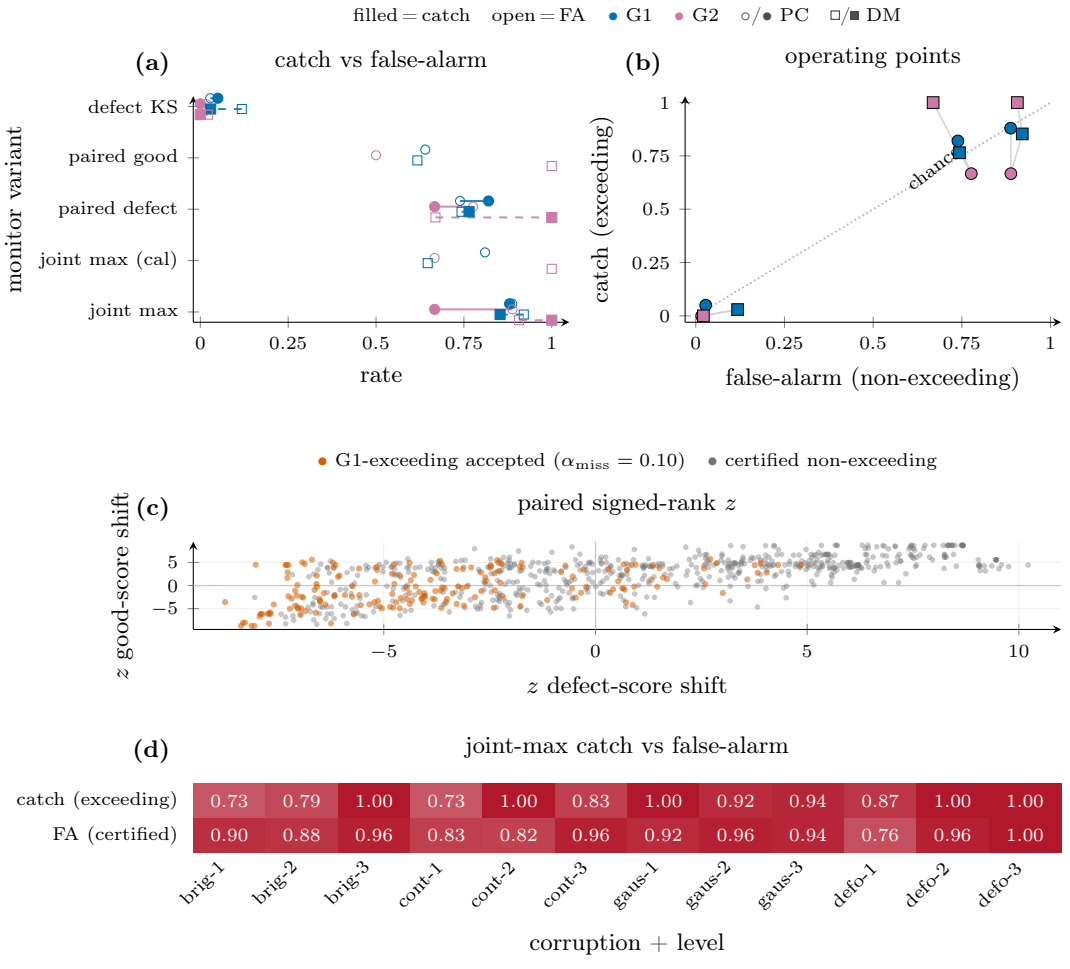
filled = catch
open = FA
G1
G2
PC
DM
(a)
catch vs false-alarm
monitor variant
defect KS
paired good
paired defect
joint max (cal)
joint max
0
0.25
0.5
0.75
1
rate
(b)
operating points
catch (exceeding)
false-alarm (non-exceeding)
chance
G1-exceeding accepted ($\alpha_{\text{miss}} = 0.10$)
certified non-exceeding
(c)
paired signed-rank z
z good-score shift
z defect-score shift
5
0
−5
10
(d)
joint-max catch vs false-alarm
catch (exceeding)
FA (certified)
0.73 0.79 1.00 0.73 1.00 0.83 1.00 0.92 0.94 0.87 1.00 1.00
0.90 0.88 0.96 0.83 0.82 0.96 0.92 0.96 0.94 0.76 0.96 1.00
brig-1
brig-2
brig-3
cont-1
cont-2
cont-3
gaus-1
gaus-2
gaus-3
defo-1
defo-2
defo-3
corruption + level